

PLL22SM-22W-XNW-101WF

LED Tube Lamp, PLL Style 2G11 Base, 22", Frosted
100~277Vac, Natural White, 4000K



DWG BY:
SRL / MM
08-25-17


R&D:
KS / UF
08-29-17

QA:
EE
08-29-17


MFG:
LD
08-29-17

REVISION LTR: PRELIMINARY

08-25-17

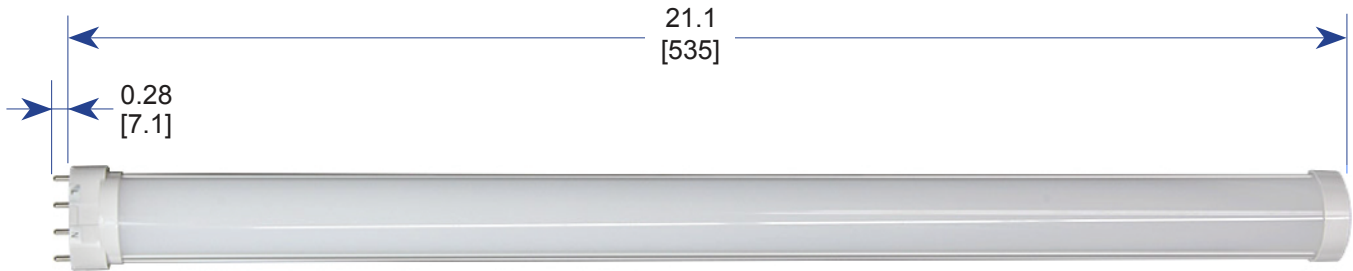

Top View

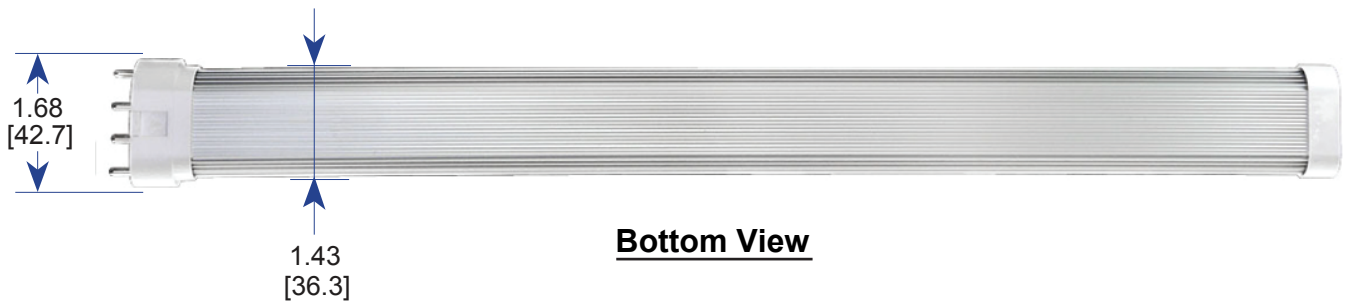

Bottom View

Notes:

1. All Dimensions are in Inches [Millimeters].



○ **Electro-Optical Characteristics**

Input Voltage (typ)	100~277Vac
Tested @ (Voltage)	120Vac
Power Consumption	22W
Current Consumption	0.18 A
Efficacy: (Lm/W)	109
Lumens	2358 lm
Max Ft-Cd	661 cd
Power Factor	0.99
CRI (Ra)	>83
CCT	4000K
Color	Natural White
Angle of illumination	180°
Weight	0.56 lbs / 255g

○ **Features**

Operating Temperature	-20°C to +40°C
Heatsink Temperature	54°C
Heatsink Material / Color	Aluminum / Silver
Lens Color	Frosted White
Lens Material	Polycarbonate
LED Qty	148 pcs
LED type	Epistar SMD2835
LED LM80 Report	-
LM79 Report	-
UL/cUL Listed	E474634(CH-2G11-22W)
Dimmable	No
Life Span	50,000 hrs.
Warranty	3 Years