


LTR	REVISION	DATE	APPD
-	RELEASED	10-19-10	

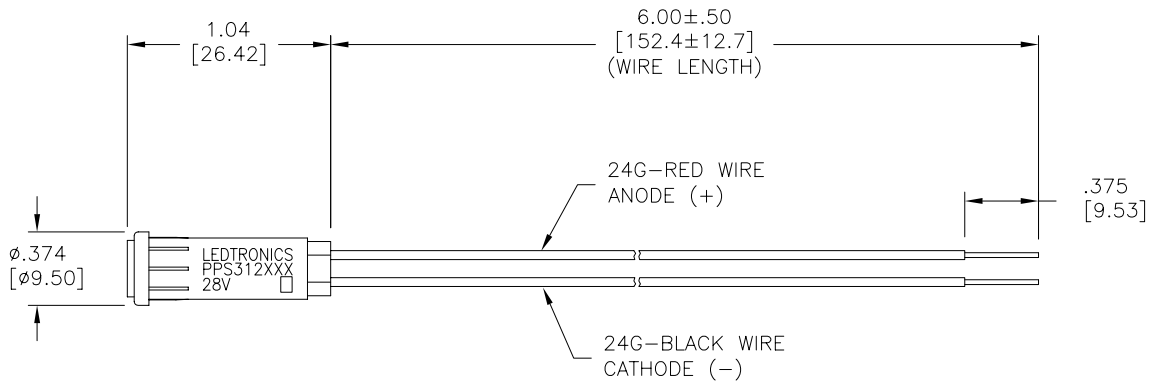

NOTES:

1. PARTS WITH (*) ARE "RoHS" CERTIFIED.
2. MOUNTING DIAMETER: Ø5/16"
3. LENS MATERIAL: GE LEXAN 101-112
4. SLEEVE MATERIAL: NYLON 66 (UL94V-1 MINIMUM, UL94V-0 PREFERRED)

REVISION NOTIFICATION	
<input type="checkbox"/>	PMA
<input type="checkbox"/>	UL
<input type="checkbox"/>	MADE IN USA
<input type="checkbox"/>	CUSTOMER _____
<input type="checkbox"/>	OTHER

LEDTRONICS PART NO.	DESCRIPTION PART NO.	COLOR EMITTED	INPUT VOLTAGE, V	READ mA	lv mcd (typ)	λP nm	FULL VIEWING ANGLE
PPS312-0AG-028V-W6	PPS312CAG6K-28V-W6	AQUA GREEN	28	15	-	518	12-15°
PPS312-0UG-028V-W6	PPS312CWG1K-28V-W6	SUPER GREEN	28	20	-	573	12-15°
PPS312-0UR-028V-W6*	-	ULTRA RED	28	20	900	652	12-15° *
PPS312-0UY-028V-W6*	PPS312CY3K-28V-W6	SUPER YELLOW	28	20	1800	598	12-15° *
PPS312-1AG-028V-W6*	PPS312CAG3K-28V-W6	AQUA GREEN	28	15	1500	518	12-15° *
PPS312-1CW-028V-W6*	-	COOL WHITE	28	15	-	10000K	12-15° *
PPS312-1PB-028V-W6	-	SUPER BLUE	28	15	-	466	12-15°
PPS312CG5-28V-W6*	PPS312CG5-28V/20-W6	HI-EFF GREEN	28	20	145	566	20° *
PPS312CR6-0005	PPS312CR6-28V-W6	ULTRA RED	28	20	-	654	20°
PPS312CR6-28V-W6*	PPS312CR6-28V/20-W6	ULTRA RED	28	20	225	654	20° *
PPS312CY5-28V-W6*	-	YELLOW	28	20	50	585	20° *
PPS312TWYG4-28V-W6	-	YELLOW/HI-EFF GREEN	28	20	-	585/568	20°

LEDTRONICS, INC.
23105 KASHIWA COURT
TORRANCE, CA 90505

-PROPRIETARY-
This document contains Proprietary information of LEDTRONICS, INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC.

.XXX ± .010 TOLERANCE PER ANSI-Y14.5
.XX ± .025 (UNLESS OTHERWISE STATED)
ANGLES ± 0°,30'
FRACT. ± 1/32

TITLE PPS312-XXX-028V-W6 PPS312CXXXX-XXXX					
DWG NO PPS312-28V-W6		SCALE 1:1	SHEET 1 OF 1	DATE 10-19-10	
CODE IDENT NO. 8Z410	DWG BY GP 10-19-10	CHK BY PL 10-20-10	QA	MFG	R&D