

Presented By: Candela Corporation
Contact Phone: (800) 922-9226
Contact E-mail: sales@candelacorp.com



Customer Name:
Project Name:
Fixture Type:



GE
Lighting

25222 - PR6

GE B3.5 (B3 1/2) - Low Voltage; Hand Lantern; Flashlight

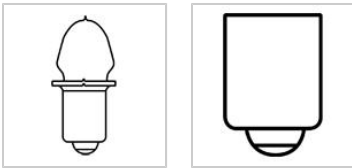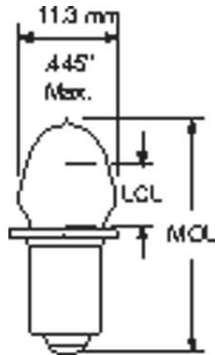

GENERAL CHARACTERISTICS

Lamp Type	Miniature - B Shape
Bulb	B3.5 (B3 1/2)
Base	Single Contact Miniature Flanged
Filament	C-2R
Wattage	1
Voltage	2.47
Rated Life	30 hrs
Atmosphere	Vacuum
Primary Application	Low Voltage;Hand Lantern;Hand Lantern;Flashlight

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	6
Nominal Initial Lumens per Watt	6
Mean Spherical Candlepower (MSCP)	0.45

DIMENSIONS

Maximum Overall Length (MOL)	1.2500 in(31.8 mm)
Bulb Diameter (DIA)	0.438 in(11.1 mm)
Bulb Diameter (DIA) (MAX)	0.438 in(11.1 mm)
Light Center Length (LCL)	0.250 in(6.4 mm)

PRODUCT INFORMATION

Product Code	25222
Description	PR6
ANSI Code	PR6
Standard Package	Case
Standard Package GTIN	00043168252225
Standard Package Quantity	50
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	50
UPC	043168963343