



Shown: Vive wireless hub and flush-mount adapter

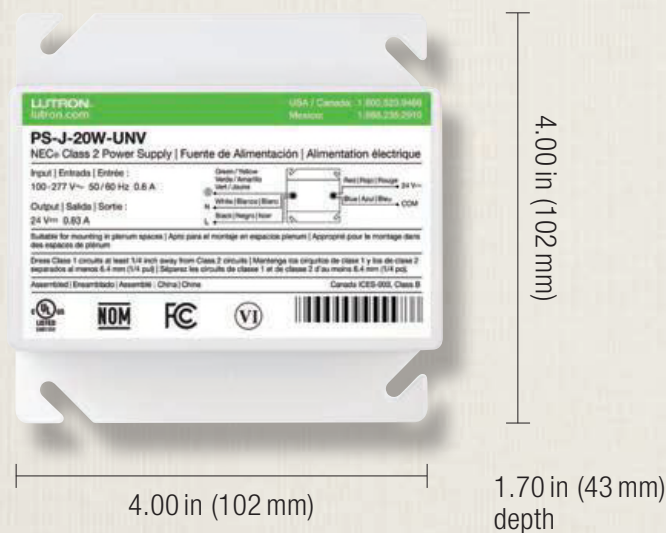

Shown: Vive wireless hub external power supply

### Product family features

- Provides a connection point for up to 700 Lutron Vive devices, such as Vive Maestro Wireless dimmers/switches (see p. 164), Vive PowPak remote-mount modules (see p. 174), Vive PowPak wireless fixture control modules (see p. 178), Pico wireless remotes (see p. 184), Radio Powr Savr occupancy/vacancy sensors (see pp. 204 and 206), and Radio Powr Savr daylight sensors (see p. 208)
- Communicates with Vive devices via Lutron reliable Clear Connect radio frequency (RF) technology
- Connects directly to any smartphone, tablet, or computer using built-in Wi-Fi
- Web-based software used for setup, programming, control, monitoring and dashboards of current status and energy usage; software supported on most devices that use an HTML5-compliant browser
- Supports timeclock events based on both sunrise and sunset, or fixed time of day
- Ethernet connection available to network multiple Vive hubs together and to provide native BACnet integration into the Building Management Systems
- RF and Wi-Fi range of 71 ft (22 m); Pico wireless remotes and Radio Powr Savr sensors communicate directly with load devices and must be located within 30 ft (9 m) of the device to which they are associated
- Communicates at 434 MHz frequency and 2.4 GHz

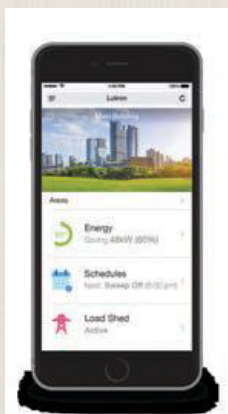

Shown: Vive Vue software

### Vive wireless hub



- Supports up to 700 Lutron wireless devices
- Integrated multi-color LED provides feedback
- Flush-mount or surface-mount options available

#### Vive wireless hub with power supply and mounting adapter

Flush-mount adapter	HJS-1-FM
Surface-mount adapter	HJS-1-SM

### Premium Vive wireless hub



- Supports up to 700 Lutron wireless devices
- Allows for native BACnet integration into Building Management Systems
- Integrated multi-color LED provides feedback
- Flush-mount or surface-mount options available

#### Premium Vive wireless hub with power supply and mounting adapter

Flush-mount adapter	HJS-2-FM
Surface-mount adapter	HJS-2-SM

### Vive Vue software



- Supported on most smart devices that use an HTML5-compliant browser
- Allows you to wirelessly connect system controls and program system settings
- Provides dashboard of current status for control and monitoring; also shows current energy usage

#### Vive Vue software

Included for free with any Vive wireless hub purchase

#### Vive wireless hub replacement parts

Vive wireless hub external power supply	PS-J-20W-UNV
Flush-mount installation adapter	H-MOUNT-FM
Surface-mount installation adapter	H-MOUNT-SM

#### Ethernet switches

16 port	ETH-SWITCH-16
24 port	ETH-SWITCH-24
24 port, 1 multi-mode fiber	ETH-SWITCH-24-1M
24 port, 2 multi-mode fiber	ETH-SWITCH-24-2M
24 port, 1 single-mode fiber	ETH-SWITCH-24-1S
24 port, 2 single-mode fiber	ETH-SWITCH-24-2S

All switches are unmanaged 10/100/1000 Mbps. This is a suggested, not holistic list. IT provided gear that is equivalent or better is sufficient. Enterprise level gear recommended.