

OVERVIEW

The PS50X Power Supply is a Class 2 low voltage power supply intended to power an Acuity Relay Panel, or other 24VDC Acuity Controls devices. The PS50X is intended for use with 120-277V, 50/60Hz circuits.

FEATURES

- Available separately for use as low voltage power supply for Acuity Controls equipment
- 24VDC output, Class 2 Circuit
- 120-277V, 50/60Hz input
- Supplies 50W
- Consumes up to 0.7A max
- UL Listed (E110912)
- Designed for installation in NEMA 1 enclosure (not included) via mounting feet
 - Minimum recommended enclosure size: 4"H x 8"W x 4"D
 - Recommend mounting hardware: 8-32 Self-tapping Screws

ENVIRONMENTAL

- Maximum Ambient : 122°F/50°C
- Minimum Ambient : 32°F/0°C
- Relative Humidity: 90% non-condensing
- Designed for permanent interior installation

Warranty


Five-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.

AcuityControls[™]

nLight[®]

PS50X Power Supply Low Voltage Power Supply

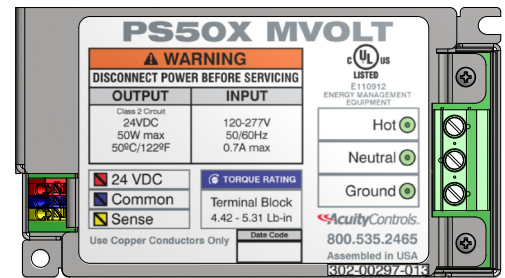


ORDERING INFORMATION

Example: PS50X

Series

PS50X 50W Power Supply

INSTALLATION

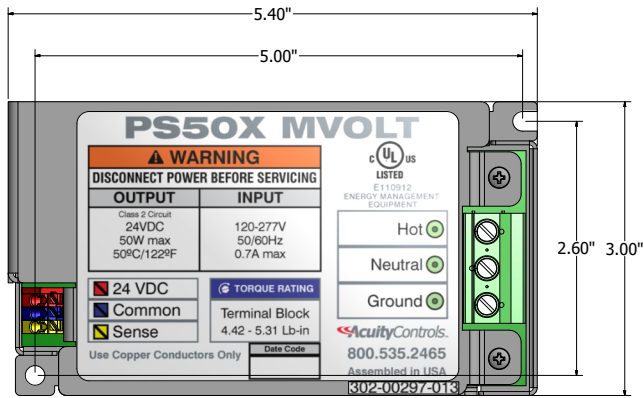

Note: NEMA1 enclosure supplied by others

WIRING CONNECTIONS

