

Presented By: Candela Corporation
Contact Phone: (800) 922-9226
Contact E-mail: sales@candelacor.com



Customer Name:
Project Name:
Fixture Type:



GE
Lighting

15485 - Q20A/PAR56/1/C

GE Quartzline® PAR56 - Airport & Airfield

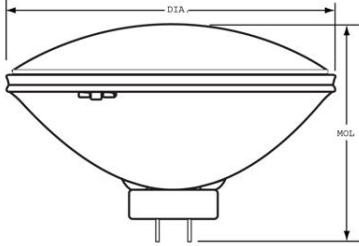

GENERAL CHARACTERISTICS

Lamp Type	Sealed Beam - PAR
Bulb	PAR56
Base	Mogul End Prong (GX16d)
Filament	CC-6
Wattage	500
Rated Life	500 hrs
Primary Application	Airport & Airfield

ELECTRICAL CHARACTERISTICS

Burn Position	Universal burning position
---------------	----------------------------

DIMENSIONS

Maximum Overall Length (MOL)	5.0000 in(127.0 mm)
Bulb Diameter (DIA)	7.000 in(177.8 mm)
Bulb Diameter (DIA) (MAX)	7.000 in(177.8 mm)

PRODUCT INFORMATION

Product Code	15485
Description	Q20A/PAR56/1/C
Standard Package	Case
Standard Package GTIN	10043168154854
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168154857

CAUTIONS & WARNINGS

Caution

- Lamp may shatter and cause injury if broken
 - Do not use lamp if outer glass is scratched or broken.

Warning

- A damaged lamp emits UV radiation which may cause eye/skin injury
 - Turn power off if glass bulb is broken. Remove and dispose of lamp.
- Risk of Fire
 - Keep combustible materials away from lamp.
 - Use in enclosed fixture rated for this product.
- Unexpected lamp rupture may cause injury, fire, or property damage
 - Do not exceed 110% of rated voltage.
 - Do not use lamp if outer glass is scratched or broken.
 - Use in enclosed fixture rated for this product.
- Risk of Burn
 - Allow lamp/fixture to cool before handling.