


HALOGEN LAMPS

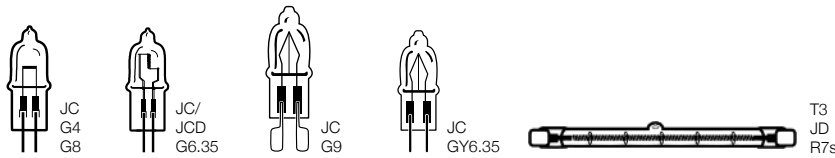

| Bulb | Base | Product Number | Footnotes | Product Code | Description | Pkg. Qty. | Volts | Lumens | Color Temp | Avg. Life | Design Filament | MOL | Beam Spread | |
|---|--------|----------------|-----------|--------------|----------------|-----------------|-----------|--------|------------|------------|-----------------|-----------------|-------------|-------------|
| PRISM & HaloXen. JC Type continued | | | | | | | | | | | | | | |
| 50 WATT | | | | | | | | | | | | | | |
| T4 | G6.35 | 107014 | 3 | JC50 | Clear | 10/1000 | 12 | 900 | 2950 | 3000 | C-8 | 1.65" | - | |
| | | 107716 | 2,3 | JC50/HX | Clear HaloXen® | 10/1000 | 12 | 900 | 3000 | 10000 | C-8 | 1.60" | - | |
| | GY6.35 | 107015 | 3 | JCD50 | Clear | 10/500 | 130 | 600 | 2900 | 2000 | CC-2 | 1.69" | - | |
| | G8 | 107074 | 3 | JCD50/G8 | Clear | 10/500 | 130 | 600 | 2900 | 2000 | CC-2 | 1.69" | - | |
| 60 WATT | | | | | | | | | | | | | | |
| T4 | G9 | 71002 | 3 | JCD60/G9 | Clear | 10/500 | 130 | 780 | 2950 | 2000 | CC-2V | 1.69" | - | |
| | | 107904 | 3 | JCD60FR/G9 | Frost | 10/500 | 130 | 750 | 2950 | 2000 | CC-2V | 1.69" | - | |
| 75 WATT | | | | | | | | | | | | | | |
| T4 | GY6.35 | 107002 | 3 | JC75 | Clear | 10/1000 | 12 | 1350 | 3000 | 3000 | C-8 | 1.69" | - | |
| | | 107001 | 3 | JCD75 | Clear | 10/500 | 130 | 980 | 2950 | 2000 | CC-2V | 1.69" | - | |
| 100 WATT | | | | | | | | | | | | | | |
| T4 | GY6.35 | 107004 | 3 | JC100 | Clear | 10/1000 | 12 | 2100 | 3100 | 3000 | C-8 | 1.69" | - | |
| | | 107003 | 3 | JCD100 | Clear | 10/500 | 130 | 1400 | 3050 | 2000 | CC-2V | 1.69" | - | |
| | G8 | 107070 | 3 | JCD100/G8 | Clear | 10/500 | 130 | 1400 | 3050 | 2000 | CC-2V | 1.69" | - | |
| Bulb | Base | Product Number | Footnotes | Product Code | ANSI | Description | Pkg. Qty. | Volts | Lumens | Color Temp | Avg. Life | Design Filament | MOL | Beam Spread |
| PRISM J Type Double Ended | | | | | | | | | | | | | | |
| 75 WATT | | | | | | | | | | | | | | |
| T3 | R7s | 107210 | 3,8,9 | Q75T3C/S | - | Clear 78mm | 10/500 | 130 | 1250 | 2850 | 2000 | C-8 | 3.07" | - |
| 100 WATT | | | | | | | | | | | | | | |
| T3 | R7s | 107182 | 3,8,9 | Q100T3C | - | Clear 118mm | 10/500 | 130 | 1400 | 2950 | 2000 | C-8 | 4.68" | - |
| | | 107184 | 3,8,9 | Q100T3C/S | - | Clear 78mm | 10/500 | 130 | 1400 | 2950 | 2000 | C-8 | 3.11" | - |
| 150 WATT | | | | | | | | | | | | | | |
| T3 | R7s | 107186 | 3,8,9 | Q150T3C | - | Clear 118mm | 10/500 | 130 | 2250 | 2950 | 2000 | C-8 | 4.68" | - |
| | | 107188 | 3,8,9 | Q150T3C/S | - | Clear 78mm | 10/500 | 130 | 2400 | 2950 | 2000 | C-8 | 3.07" | - |
| | | 107214 | 3,8,9 | Q150T3C/12V | - | Clear 83mm Pool | 10/500 | 12 | 2500 | 2950 | 2000 | C-8 | 3.27" | - |
| 200 WATT | | | | | | | | | | | | | | |
| T3 | R7s | 107190 | 3,8,9 | Q200T3C | - | Clear 118mm | 10/500 | 130 | 3200 | 2950 | 2000 | C-8 | 4.68" | - |
| | | 107192 | 3,8,9 | Q200T3C/S | - | Clear 78mm | 10/500 | 130 | 3200 | 2950 | 2000 | C-8 | 3.11" | - |
| 250 WATT | | | | | | | | | | | | | | |
| T3 | R7s | 107208 | 3,8,9 | Q250T3C/S | - | Clear 78mm | 10/500 | 130 | 4000 | 2950 | 2000 | C-8 | 3.11" | - |
| | | 107216 | 3,8,9 | Q250T3C/83MM | - | Clear 83mm Pool | 10/500 | 130 | 4000 | 2950 | 2000 | C-8 | 3.27" | - |
| 300 WATT | | | | | | | | | | | | | | |
| T3 | R7s | 107194 | 3,8,9 | Q300T3C | - | Clear 118mm | 10/500 | 130 | 5000 | 2950 | 2000 | C-8 | 4.68" | - |
| | | 127194 | 3,8,9 | Q300T3C/120 | EHM | Clear 118mm | 10/500 | 120 | 5000 | 2950 | 2000 | C-8 | 4.68" | - |

(E) Means this lamp meets Federal Minimum Efficiency standards.

Halogen lamp symbols, footnotes and abbreviations are located on pages 131-133.