



# Passion NAIL LOUNGE

## WOW Series

YOUR EVERYDAY MODULE FOR YOUR EVERYDAY NEED



The WOW II MAX Get ready to be wowed by their performance and energy savings!

The WOW Series modules, a market favorite for 10 years, offer versatility in colors, reliability, and affordability. Ideal for everyday use, they now reach new heights with the WOW II MAX - the market's first 200lm/w module, showcasing our latest technological breakthrough.

### Compact, Versatile, and Durable

Perfect for any size of channel letters and cabinets, the WOW II MAX feature a 170-degree lens, enabling effective usage in as little as a 2" depth channel letters.


These modules promise longevity with an L80 rating for a 50,000-hour lifetime. Installation is simplified and flexible, thanks to the dual options of 3M tape and mechanical mounting holes, accommodating various installation preferences.

### Features and Loading Capacity -WOW II MAX

The WOW II MAX is highly efficient in power usage, capable of supporting 50ft with a 60W/12V power supply.

Assurance of quality is backed by a substantial 7-year factory warranty, coupled with a limited 5-year labor warranty, reflecting our confidence in the product's durability and performance.

With an IP67 rating, the WOW series is versatile for use in damp locations, providing clients with more options for different environmental conditions.

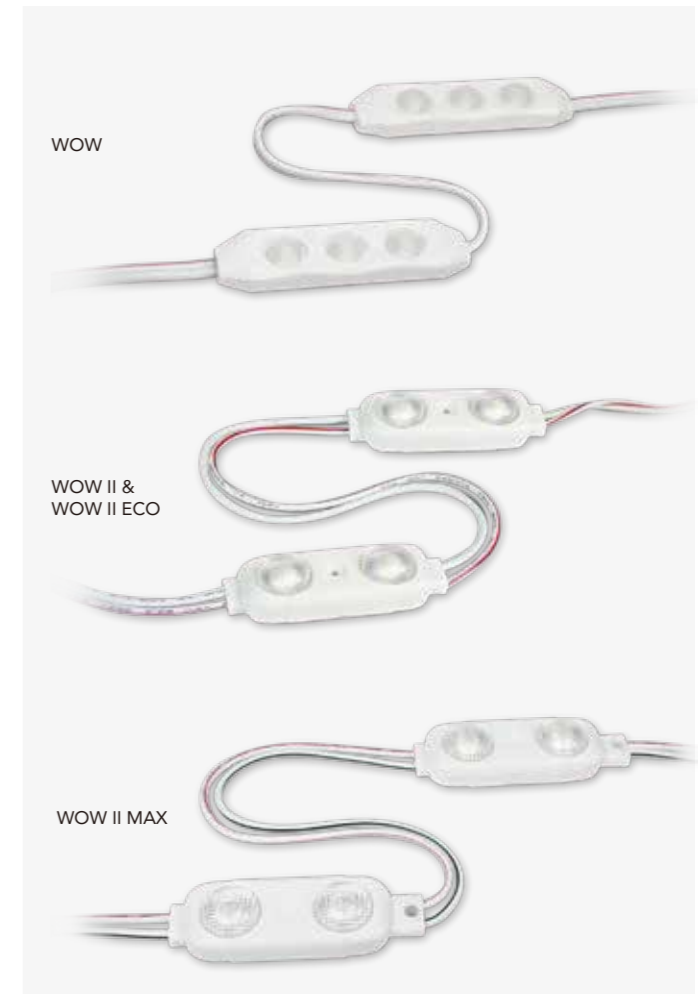



### Module Population Guide

Module	Channel Letter Depth (in)	Multiple Rows (rows spacing)	Clearance	Mods per Ft
WOW	3"	5"	3"	2
	4"	5"	4"	2
	5"	6"	4"	2
	6"	7"	5"	2
WOW II	3"	7"	4"	1.5
	4"	10"	5"	1.5
	5"	12"	6"	1.5
	6"	15"	7"	1.5



Module	Channel Letter Depth (in)	Multiple Rows (rows spacing)	Clearance	Mods per Ft
WOW II ECO	3"	7"	4"	1.5
	4"	10"	5"	1.5
	5"-6"	12"	6"	1.5
	7"-10"	15"-18"	7"	1.5
WOW II MAX	3"	7"	4"	1.5
	4"	10"	5"	1.5
	5"-6"	12"	6"	1.5
	7"-10"	15"-18"	7"	1.5

## Dimensions & Viewing Angle



### WOW

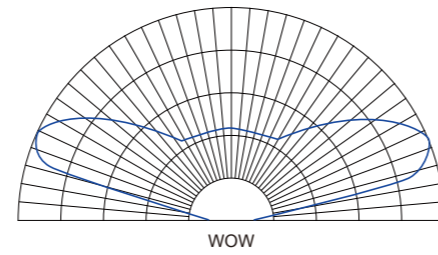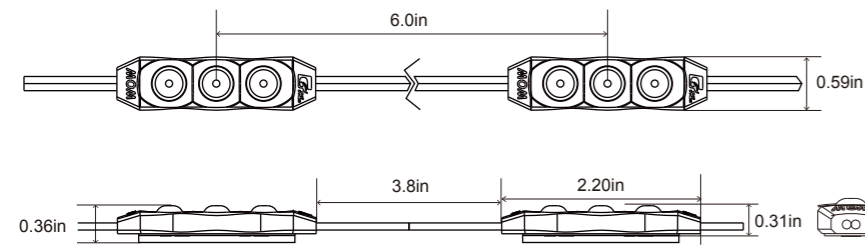

### WOW II & WOW II ECO

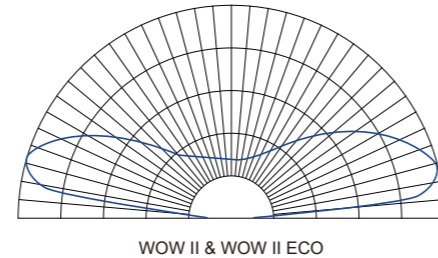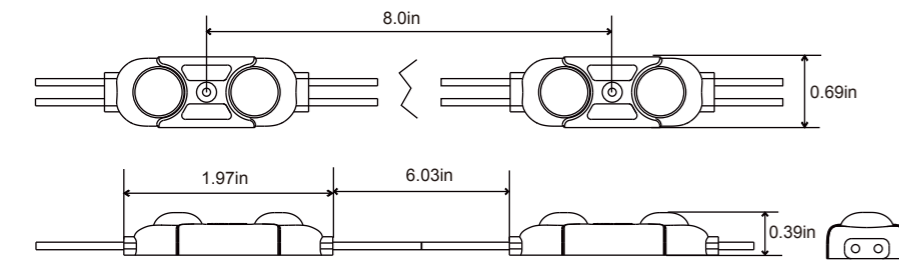

### WOW II MAX

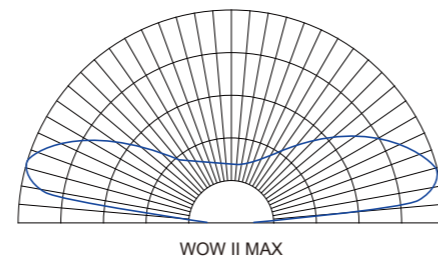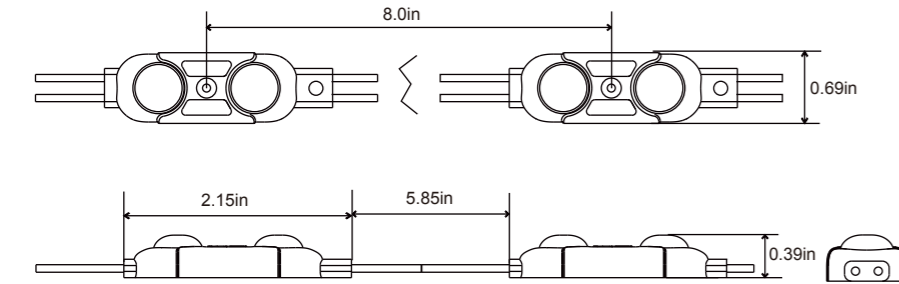

## Components

Part#	Description	Color	Order Unit	Mods per Bag	FT per Bag	100% Power Supply Load (60W 12V)	100% Power Supply Load (120W 12V)	100% Power Supply Load (264W 12V)
QISM4001-A	WOW 7500k	Pure White	Bag	60 modules	30ft	83 mods (41.5ft)	166 mods (83ft)	366 mods (183ft)
QISM4002-A	WOW 6300k	Bright White	Bag	60 modules	30ft	83 mods (41.5ft)	166 mods (83ft)	366 mods (183ft)
QISM4003-A	WOW 4200k	Soft White	Bag	60 modules	30ft	83 mods (41.5ft)	166 mods (83ft)	366 mods (183ft)
QISM4008-A	WOW 2700K	Warm White	Bag	60 modules	30ft	83 mods (41.5ft)	166 mods (83ft)	366 mods (183ft)
QISM4004-A	WOW Red	Red	Bag	60 modules	30ft	120 mods (60ft)	240 mods (120ft)	528 mods (264ft)
QISM4005-A	WOW Blue	Blue	Bag	60 modules	30ft	83 mods (41.5ft)	166 mods (83ft)	366 mods (183ft)
QISM4006-A	WOW Green	Green	Bag	60 modules	30ft	83 mods (41.5ft)	166 mods (83ft)	366 mods (183ft)
QISM4007-A	WOW Yellow	Amber Yellow	Bag	60 modules	30ft	83 mods (41.5ft)	166 mods (83ft)	366 mods (183ft)
QISM1202-A	WOW II 6300K	Bright White	Bag	80 modules	53.3ft	83 mods (55.3ft)	166 mods (110.6ft)	366 mods (244ft)
QISM1203-A	WOW II 2700K	Warm White	Bag	80 modules	53.3ft	83 mods (55.3ft)	166 mods (110.6ft)	366 mods (244ft)
QISM1204-A	WOW II Red	Red	Bag	80 modules	53.3ft	120 mods (80ft)	240 mods (160ft)	528 mods (352ft)
QISM1205-A	WOW II Green	Blue	Bag	80 modules	53.3ft	83 mods (55.3ft)	166 mods (110.6ft)	366 mods (244ft)
QISM1206-A	WOW II Blue	Green	Bag	80 modules	53.3ft	83 mods (55.3ft)	166 mods (110.6ft)	366 mods (244ft)
M120104	WOW II ECO Red	Red	Bag	80 modules	53.3ft	83 mods (55.3ft)	166 mods (110.6ft)	366 mods (244ft)
M120105	WOW II ECO Green	Green	Bag	80 modules	53.3ft	83 mods (55.3ft)	166 mods (110.6ft)	366 mods (244ft)
M120106	WOW II ECO Blue	Blue	Bag	80 modules	53.3ft	83 mods (55.3ft)	166 mods (110.6ft)	366 mods (244ft)

Part#	Description	Color	Order Unit	Mods per Bag	FT per Bag	100% Power Supply Load (60W 12V)	100% Power Supply Load (120W 12V)	100% Power Supply Load (264W 12V)
M1207	WOW II MAX 7500k	Pure White	Bag	70 modules	46.7ft	75 mods (50ft)	150 mods (100ft)	330 mods (220ft)
M1208	WOW II MAX 6300k	Bright White	Bag	70 modules	46.7ft	75 mods (50ft)	150 mods (100ft)	330 mods (220ft)
M1209	WOW II MAX 4200k	Soft White	Bag	70 modules	46.7ft	75 mods (50ft)	150 mods (100ft)	330 mods (220ft)
M1210	WOW II MAX 2700k	Warm White	Bag	70 modules	46.7ft	75 mods (50ft)	150 mods (100ft)	330 mods (220ft)

## Technical Specifications

Part#	Description	Color Temperature	Voltage	Module Wattage	Foot Wattage	Modules per ft	Module Lumens (lm)	Foot lumens (lm)	Lumen Efficacy (lm/W)	Viewing Angle
QISM4001-A	WOW 7500k	7500k	12V	0.72W	1.44W	2	70	140	97.2	140°
QISM4002-A	WOW 6300k	6300k	12V	0.72W	1.44W	2	68.3	136.6	94.9	140°
QISM4003-A	WOW 4200k	4200k	12V	0.72W	1.44W	2	67.7	135.4	94.0	140°
QISM4008-A	WOW 2700K	2700K	12V	0.72W	1.44W	2	66.8	133.6	92.8	140°
QISM4004-A	WOW Red	622nm	12V	0.5W	1W	2	23.9	47.8	33.2	140°
QISM4005-A	WOW Blue	455nm	12V	0.72W	1.44W	2	11.3	22.6	15.7	140°
QISM4006-A	WOW Green	525nm	12V	0.72W	1.44W	2	66.5	133	92.4	140°
QISM4007-A	WOW Yellow	590nm	12V	0.72W	1.44W	2	66.2	132.4	91.9	140°
QISM1202-A	WOW II 6300K	6300k	12V	0.72W	1.08W	1.5	115.7	173.6	160.7	172°
QISM1203-A	WOW II 2700K	2700K	12V	0.72W	1.08W	1.5	113.2	169.8	157.2	172°
QISM1204-A	WOW II Red	622nm	12V	0.5W	0.75W	1.5	17.0	25.5	34	172°
QISM1205-A	WOW II Green	455nm	12V	0.72W	1.08W	1.5	40.3	60.5	56.0	172°
QISM1206-A	WOW II Blue	525nm	12V	0.72W	1.08W	1.5	8.2	12.3	11.4	172°
M120104	WOW II ECO Red	622nm	12V	0.72W	1.08W	1.5	25.7	38.6	35.7	172°
M120105	WOW II ECO Green	455nm	12V	0.72W	1.08W	1.5	69.5	104.3	96.5	172°
M120106	WOW II ECO Blue	525nm	12V	0.72W	1.08W	1.5	13.3	20.0	18.5	172°
M1207	WOW II MAX 7500k	7500k	12V	0.8W	1.2W	1.5	160.2	240.3	200.25	172°
M1208	WOW II MAX 6300k	6300k	12V	0.8W	1.2W	1.5	155.39	233.09	194.24	172°
M1209	WOW II MAX 4200k	4200k	12V	0.8W	1.2W	1.5	152.19	228.29	190.24	172°
M1210	WOW II MAX 2700k	2700K	12V	0.8W	1.2W	1.5	145.78	218.67	182.23	172°

## 100% Power Supply Load

Part#	Description	G2G Class 2 60W 12V Power Supply		G2G Class 2 120W 12V Power Supply		G2G Class 1 264W 12V Power Supply with Power Distribution Splitter (PDS)	
		Modules	Feet	Modules	Feet	Modules	Feet
QISM4001-A	WOW 7500K	83	41.5	166	83	366	183
QISM4002-A	WOW 6300K	83	41.5	166	83	366	183
QISM4003-A	WOW 4200K	83	41.5	166	83	366	183
QISM4008-A	WOW 2700K	83	41.5	166	83	366	183
QISM4004-A	WOW Red	120	60	240	120	528	264
QISM4005-A	WOW Blue	83	41.5	166	83	366	183
QISM4006-A	WOW Green	83	41.5	166	83	366	183
QISM4007-A	WOW Yellow	83	41.5	166	83	366	183
QISM1202-A	WOW II 6300K	83	55.3	166	110.6	366	244
QISM1203-A	WOW II 2700K	83	55.3	166	110.6	366	244
QISM1204-A	WOW II Red	120	80	240	160	528	352
QISM1205-A	WOW II Green	83	55.3	166	110.6	366	244
QISM1206-A	WOW II Blue	83	55.3	166	110.6	366	244
M120104	WOW II ECO Red	83	55.3	166	110.6	366	244
M120105	WOW II ECO Green	83	55.3	166	110.6	366	244
M120106	WOW II ECO Blue	83	55.3	166	110.6	366	244
M1207	WOW II MAX 7500k	75	46.7	150	100	330	220
M1208	WOW II MAX 6300k	75	50	150	100	330	220
M1209	WOW II MAX 4200k	75	50	150	100	330	220
M1210	WOW II MAX 2700k	75	50	150	100	330	220