

QUICKTRONIC® T8 8-Foot Instant Start UNV Systems



Normal Ballast Factor

Professional Series

QTP T8 8 FT

Lamp / Ballast Guide

59W T8 8-Foot - OCTRON® lamps
2-lamp QTP2x59T8 UNV ISN SC

Primary Lamp Type:
F096T8 (59W Lamp)

Also operates:
F096T8/SS (54W Lamp)
F072T8
F048T8

Key System Features

- Over 30% Energy savings
- Provides 50% longer lamp life than standard magnetic T12 slimline lamps
- 0.88 Ballast factor (see table)
- Min. Starting Temp:
 - 0°F (-18°C) for T8 lamps
 - 60°F (16°C) for Energy Saving T8 lamps
- Universal voltage (120-277V)
- <10% THD
- Virtually eliminates lamp flicker
- RoHS compliant
- Lead-free solder and manufacturing process

Application Information

SYLVANIA QUICKTRONIC 59 ISN ballasts

are ideally suited for:

- Commercial
- Retail
- New construction
- Industrial
- Schools
- Retrofit

SYLVANIA QUICKTRONIC SYSTEM 59 ISN UNV electronic T8 ballasts offer several advantages:

- Operate OCTRON T8 lamps with maximum efficacy and high lumen output
- Over 30% energy savings when compared to F96T12 magnetically ballasted systems
- **Longer Lamp Life:** provides 50% longer lamp life compared to standard magnetic T12 slimline systems
- **Parallel Circuitry:** keeps remaining lamp lit if one goes out
- **Small Can Enclosure for:**
 - low profile fixture design
 - transportation, inventory and ergonomic benefits
- **New Banded Packaging**
- Distributor-friendly for easy stocking and individual ballast sales

System Information

SYLVANIA QUICKTRONIC SYSTEM 59 ISN UNV ballast advantages:

- Operate from 120V through 277V
 - Eliminates "wrong voltage" errors
 - Reduces inventory by 50%
- Utilizes Instant Start operation for
 - Highest System Efficacy
 - Low temperature starting capability
- Very low harmonic distortion (<10%)THD
- Operate at >42 kHz to reduce potential interference with infrared control systems
- Customers should always consider upgrading to our **High Efficiency Systems** to maximize energy savings.




- Reduced waste
- Easy removable bands
- No tangled wires

These ballasts are also RoHS compliant and feature lead-free solder and manufacturing process.

Setting the standard for quality, QUICKTRONIC T8 8-foot Instant Start 59 ISN UNV systems are covered by the QUICK 60+® warranty, the first and most comprehensive lamp & ballast system warranty in the industry.

System Type	Input Power (W)	Initial System Lumens	System Efficacy (LPW)	Mean System Lumens	Relative Mean Light Output	Energy Savings	Lamp Life (%*)
Magnetic Ballast 2-F96T12	160	11,345	71	9985	100%	0%	Baseline
Magnetic Ballast 2-F96T12/SS	125	9330	75	8210	82%	22%	100%
QTP2x59-ISN 2-F096T8/XP® (59W)	112	10,735	96	10,090	101%	30%	150%
QTP2x59-ISN F096T8/54W/XP/SS	104	10,030	96	9430	94%	35%	150%

*3 hours/start

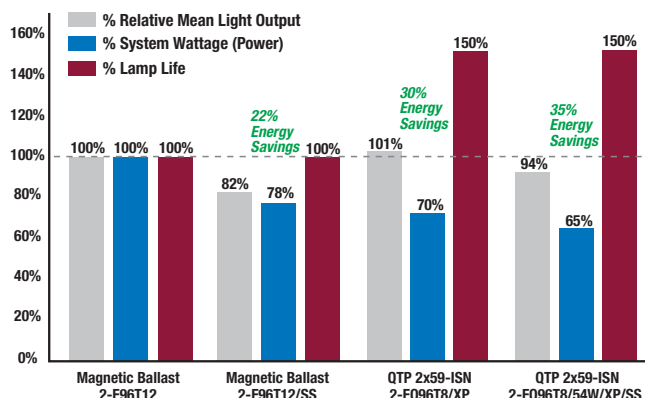

SPECIFICATION DATA

Catalog #	Date	Type
Project	Prepared by	
Comments		

Electronic T8 8-foot Fluorescent Systems Universal Voltage (120-277V)




Item Number	OSRAM SYLVANIA Description	Input Current (AMPS)	Lamp Type	Rated Lumens (lm)	No. of Lamps	Ballast Factor (BF)	System Lumens	Mean Lumens	Input Power (W)	System Efficacy (lm/W)	BEF ¹
49590	QTP2x59T8/UNV ISN-SC	0.93/0.40	F096T8/700 (59W)	5700	2	0.88	10,030	9030	112/110	90/91	0.80
49598	Banded Pack	0.93/0.40	F096T8/XP® (59W)	6100	2	0.88	10,735	10,090	112/110	96/98	0.80
49598	10-Pack	0.85/0.36	F096T8/54W/XP/SS	5700	2	0.88	10,030	9430	104/102	96/98	0.86
		0.70/0.31	F072T8/XP	4650	2	0.89	8275	7780	86/85	96/97	1.05
		0.47/0.21	F048T8/XP	2850	2	0.89	5075	4770	58	88	1.53
		0.56/0.25	F096T8/XP (59W)	6100	1	1.02	6220	5850	67	93	1.52
		0.51/0.22	F096T8/54W/XP/SS	5700	1	1.02	5815	5465	62	94	1.65
		0.43/0.20	F072T8/XP	4650	1	1.02	4745	4460	51	93	2.00
		0.30/0.14	F048T8/XP	2850	1	1.03	2935	2760	36	82	2.86

Banded Pack, (add "-B" to Description). Banded Pack and 10-Pack contain 10 pieces each.

F096T8/XP/SS (55W) has been re-rated to F096/54W/XP/SS.

¹ Ballast Efficiency Factor (BEF) shown = (Ballast Factor x 100) divided by Input Power (Note: calculation based on lowest wattage value).

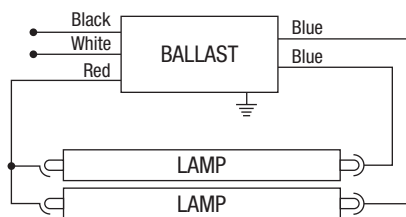

Note: For one lamp application, cap any unused blue lead. Insulate to 600 volts.

QUICKTRONIC 2x59

Dimensions "SC" Small Enclosure:

Overall: 9.5" L x 1.68" W x 1.18" H


Mounting: 8.90"

Product Weight:

1.6 lbs ea. (approx.)

Wiring:

Leads only,
no connectors provided

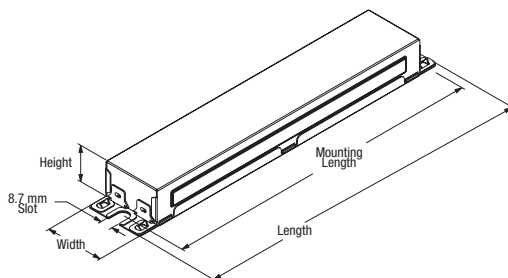

Item Number **49598 QTP 2 x 59T8 / UNV ISN SC** Case Size
 QUICKTRONIC PROFESSIONAL Starting/Ballast Factor
 Number of Lamps Line Voltage (120-277V)
 Primary Lamp Type (59W F096T8)

Normal Ballast Factor

59 T8

Instant Start

Professional Series

Performance Guide

Data based upon SYLVANIA OCTRON® lamps shown. QUICKTRONIC® 59 ISN-SC is also compatible with other lamp manufacturers equivalent lamp types that meet ANSI specifications.

Complete performance data is available in the QUICKSYSTEMS section of the SYLVANIA Ballast Technology & Specification Guide.

Specifications

Data based on F32T8

Starting Method: Instant Start

Ballast Factor: 0.88 - 1.03

Circuit Type: Parallel

Lamp Frequency: >42 kHz

Lamp CCF: Less than 1.7

Starting Temp:²

0°F (-18°C) for OCTRON® 96T8 lamps

60°F (16°C) for SUPERSAVER® lamps

Input Frequency: 50/60 Hz

Low THD: <10%

Power Factor: >98%

Voltage Range: ±10% of 120-277V
rated line (108-305V)

UL Listed Class P, Type 1 Outdoor

CSA Certified

70°C Max Case Temperature

FCC 47CFR Part 18 Non-Consumer

Class A Sound Rating

RoHS Compliant³

ANSI C62.41 Cat A. Transient Protection

GFCI compatible

Emergency ballast compatible

Remote Mounting (Max. wire length from ballast case to lampholder):

- 20 ft: full wattage T8s
- 10 ft: energy saving T8s

² Operation below 50°F (10°C) may affect light output or lamp operation – see "Low Temp. Starting" definition.

³ Complies with European Union Restriction of Hazardous Substances Directive (Directive EC 2002/95)

System Life / Warranty

QUICKTRONIC products are covered by the QUICK 60+® warranty, a comprehensive lamp and ballast system warranty. For additional details, refer to the QUICK 60+ warranty bulletin.

OSRAM SYLVANIA
National Customer
Service and Sales Center
 1-800-LIGHTBULB
 (1-800-544-4828)
www.sylvania.com

Specifications subject to change without notice.