

PSM2GPH18MVW • PSM2GPH18MVDW • PSM2GPH18MVDSW

Ballast Type: Electronic
 Input Voltage: 120 thru 277VAC ±10%
 Input Frequency: 50/60 Hz.

Starting Method: Programmed
 Lamp Connection: Series
 Unit Color: White

Unit Weight: 0.8 lb.
 Carton Quantity: 50
 Skid Quantity: 1750/1800

ELECTRICAL SPECIFICATION:

Line Voltage (V)	Lamp Type	Lamp Watts	Approx. Lamp Length	No. of Lamps	Line Current (A)	Input Power (W)	Power Factor	Max Current THD (%)	Current Crest Factor	Wiring Diagram	B.E.F.
120-277	GPH212T5	10	8	1	0.14-0.06	14	≥0.98	≤12	≤1.6	152	/
				2	0.24-0.10	24	≥0.98	≤10	≤1.5	153	/
120-277	GPH287T5	14	11	1	0.17-0.07	16	≥0.98	≤10	≤1.5	152	/
				2	0.30-0.13	30	≥0.98	≤10	≤1.5	153	/
120-277	GPH357T5	17	14	1	0.19-0.08	19	≥0.98	≤10	≤1.5	152	/
				2	0.33-0.14	33	≥0.99	≤10	≤1.5	153	/
120-277	GPH406T5	19	16	1	0.21-0.09	21	≥0.98	≤10	≤1.5	152	/
				2	0.37-0.16	37	≥0.99	≤10	≤1.5	153	/
120-277	GPH463T5	22	18	1	0.23-0.09	23	≥0.98	≤10	≤1.5	152	/
				2	0.41-0.17	41	≥0.99	≤10	≤1.5	153	/
120-277	GPH508T5	24	20	1	0.25-0.10	25	≥0.99	≤10	≤1.5	152	/
				2	0.50-0.21	50	≥0.99	≤10	≤1.5	153	/
120-277	GPH711T5	34	28	1	0.36-0.15	36	≥0.99	≤10	≤1.5	152	/
	GPH810T5	41	33	1	0.41-0.17	41	≥0.99	≤10	≤1.5	152	/
120-277	GPL18K	18	9	1	0.22-0.09	22	≥0.98	≤10	≤1.5	152	/
				2	0.44-0.18	44	≥0.99	≤10	≤1.5	153	/
120-277	GPL36K	36	15	1	0.44-0.18	43	≥0.98	≤10	≤1.5	152	/
				2	0.88-0.36	86	≥0.99	≤10	≤1.5	153	/
120-277	TUV11W 4P-SE	11	9	1	0.15-0.06	15	≥0.98	≤12	≤1.5	152	/
				2	0.26-0.11	26	≥0.98	≤10	≤1.5	153	/
120-277	TUV16W 4P-SE	16	12	1	0.18-0.08	18	≥0.98	≤10	≤1.5	152	/
				2	0.32-0.13	32	≥0.99	≤10	≤1.5	153	/
120-277	TUV18WPL-L	18	9	1	0.22-0.09	22	≥0.98	≤10	≤1.5	152	/
				2	0.44-0.18	44	≥0.99	≤10	≤1.5	153	/
120-277	TUV25W 4P-SE	25	21	1	0.26-0.11	26	≥0.99	≤10	≤1.5	152	/
				2	0.53-0.22	53	≥0.99	≤10	≤1.5	153	/
120-277	TUV36WPL-L	36	16	1	0.44-0.18	43	≥0.98	≤10	≤1.5	152	/
120-277	TUV36T5-4P-SE	36	33	1	0.41-0.17	41	≥0.99	≤10	≤1.5	152	/

PERFORMANCE:

- High efficiency electronic ballast
- Programmed start
- Series operation
- High power factor
- Encased & potted
- Sound rated A
- All-star protection
- Meets FCC Part 18 (Class B) for EMI and RFI consumer limits at 120V - 240V
- Meets ANSI standard C82.11
- Meets ANSI standard C62.41

APPLICATION:

- Maximum case temperature: 194°F/90°C
- Maximum ambient temperature: 140°F/60°C
- Minimum starting temperature: -22°F/-30°C†
- Not recommended for extreme temperature variations
- Lamp starts: >50,000 starts
- Remote mounting: 18 ft.

† Please consult lamp manufacturer's data regarding Lumen Output vs. Ambient Temperature

SAFETY:

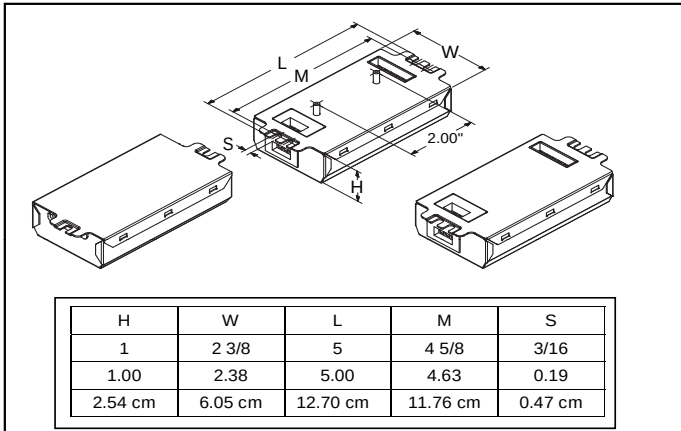
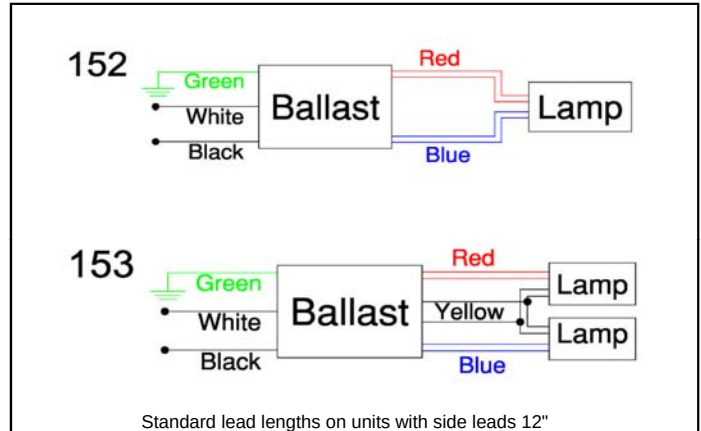
- UL/935 (Class P, Type HL, Type 1 outdoor) listed
- CSA/C22.2 certified
- RoHS Compliant
- No PCB's

ORDERING INFORMATION:

- Side Leads - W (Standard lead lengths 12")
- Dual Entry - DW
- Dual Entry with Studs - DSW

U.S. PATENT NUMBERS:

6,366,032 B1 ; 6,420,838 B1 ; 5,436,529

CASE STYLE:28

WIRING DIAGRAM:

WARRANTY:

Robertson Worldwide warrants to the purchaser that this ballast will be free from defects in material or workmanship for a period of 5 years from the date of manufacture when properly installed and under normal conditions of use. For more information on Robertson Worldwide's ballasts, call 1-800-323-5633 or visit www.robertsonww.com. Specifications subject to change without notice.

Revised 3/26/2012

ROBERTSON WORLDWIDE

13611 Thornton Rd, Blue Island, IL 60406, TEL: 1-800-323-5633, FAX: 1-877-388-2420, www.robertsonww.com