


# INCANDESCENT LAMPS

## General Service

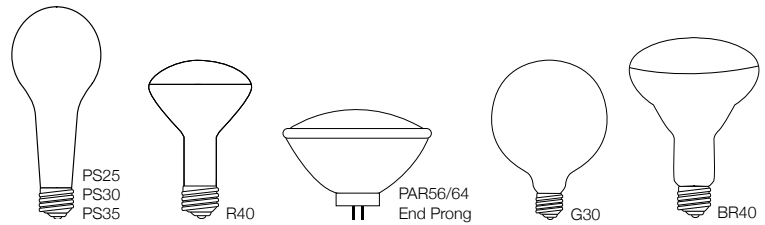

| Bulb            | Base           | Product Number | Footnotes    | Product Code   | Description                  | Pkg. Qty. | Volts | Lumens | Avg. Life | Design Filament | MOL   | Beam Spread |
|-----------------|----------------|----------------|--------------|----------------|------------------------------|-----------|-------|--------|-----------|-----------------|-------|-------------|
| <b>300 WATT</b> |                |                |              |                |                              |           |       |        |           |                 |       |             |
| PAR56           | Mog. End Prong | 65220          | 4,13         | PAR56MFL300    | Medium Flood                 | 1/12      | 120   | 3840   | 2000      | CC-13           | 5.00" | 25x11       |
|                 |                | 65042          | 4,13         | PAR56NSP300    | Narrow Spot                  | 1/12      | 120   | 3840   | 2000      | CC-13           | 5.00" | 10x8        |
|                 |                | 65230          | 4,13         | PAR56WFL300    | Wide Flood                   | 1/12      | 120   | 3840   | 2000      | CC-13           | 5.00" | 35x20       |
|                 | Screw Term.    | 65225          | 4,10,13      | PAR56WFL300/12 | Wide Flood                   | 1/12      | 12    | 6000   | 1000      | C-6             | 4.50" | 35x20       |
| PS25            | Med.           | 401305         |              | PS25CL300/P5   | Clear Prism® Long Life Plus™ | 12/60     | 130   | 3600   | 5000      | C-9M            | 6.93" | -           |
|                 |                | 401306         |              | PS25FR300/P5   | Frost Prism® Long Life Plus™ | 12/60     | 130   | 3600   | 5000      | C-9M            | 6.93" | -           |
| PS30            | Med.           | 401308         |              | PS30CL300/P5   | Clear Prism® Long Life Plus™ | 12/60     | 130   | 3600   | 5000      | C-9M            | 8.06" | -           |
|                 |                | 401310         |              | PS30FR300/P5   | Frost Prism® Long Life Plus™ | 12/60     | 130   | 3600   | 5000      | C-9M            | 8.06" | -           |
| PS35            | Mog.           | 401316         |              | PS35CL300/P5   | Clear Prism® Long Life Plus™ | 6/24      | 130   | 3600   | 5000      | C-9M            | 9.37" | -           |
|                 |                | 401318         |              | PS35FR300/P5   | Frost Prism® Long Life Plus™ | 6/24      | 130   | 3600   | 5000      | C-9M            | 9.37" | -           |
| R40             | Med.           | 104040         | 5,7,10,12,14 | R40FL300/12V   | Flood Pool Lamp              | 12/24     | 12    | 3000   | 2000      | C-6             | 6.56" | -           |
|                 |                | 104035         | 5,7,12,14    | R40FL300/HG    | Flood Hard Glass             | 12/24     | 130   | 3000   | 3000      | C-6             | 6.56" | -           |
| <b>375 WATT</b> |                |                |              |                |                              |           |       |        |           |                 |       |             |
| R40             | Med.           | 104048         | 6,7,11,14    | R40CL375       | Clear Infrared Prism®        | 12/24     | 120   | -      | 5000      | C-9             | 6.56" | -           |
|                 |                | 104050         | 6,7,11,14,16 | R40CL375/CSTF  | CoverShield® PFA Prism®      | 1/12      | 120   | -      | 5000      | C-9             | 6.56" | -           |
| <b>400 WATT</b> |                |                |              |                |                              |           |       |        |           |                 |       |             |
| G30             | Med.           | 5508           | 15           | 400G/FL        | Clear                        | 1/100     | 120   | 6800   | 800       | C-5             | 5.10" | -           |
| R40             | Med.           | 104038         | 5,12,14      | R40FL400/HG    | Flood Hard Glass             | 12/24     | 120   | 4150   | 2000      | CC-9            | 6.56" | -           |
| <b>500 WATT</b> |                |                |              |                |                              |           |       |        |           |                 |       |             |
| PAR56           | Mog. End Prong | 843494         | X 4,13       | PAR56Q500NSP   | Narrow Spot                  | 1/6       | 120   | 8000   | 4000      | CC-6            | 5.00" | 13x8        |
| PAR64           | Mog. End Prong | 839409         | 13           | PAR64MFL500    | Medium Flood Major           | 1/12      | 120   | 6500   | 2000      | CC-13           | 6.00" | 23x11       |
|                 |                | 14938          | 13           | PAR64NSP500    | Narrow Spot Major            | 1/12      | 120   | 6500   | 2000      | CC-13           | 6.00" | 12x7        |
| R40             | Med.           | 104042         | 5,12,14      | R40FL500/HG    | Flood Hard Glass             | 12/24     | 120   | 5400   | 2000      | CC-9            | 6.56" | -           |
|                 |                | 821734         | 5,12,14      | R40FL500/3FL   | Flood Major                  | 1/24      | 120   | 6500   | 2000      | C-2V            | 7.25" | -           |

Ⓢ Means this lamp meets Federal Minimum Efficiency standards.  
Incandescent lamp symbols, footnotes and abbreviations are located on pages 151-153.