

# WAC LIGHTING

## Pop-In 4" Square 5CCT

### Remodel Downlight

Fixture Type: \_\_\_\_\_  
Catalog Number: \_\_\_\_\_  
Project: \_\_\_\_\_  
Location: \_\_\_\_\_

Model	Beam	Color Temp & CRI	Lumens	CBCP	Finish
R4DSDR	F 45°	9CS 2700K/3000K/3500K/4000K/5000K - 90	1000 790	1256 1207	BK Black WT White

Example: **R4DSDR-F9CS-BK**

#### FEATURES


- 5-CCT Switchable between 2700K and 5000K
- Electrical box located on back of fixture to allow easy installation
- Sold as remodel, but new construction frame available
- Driver concealed within the fixture
- 5 year warranty

#### SPECIFICATIONS


<b>Construction</b>	Die-cast Aluminum with 20-gauge Cold Rolled Steel Junction Box
<b>Power:</b>	12W
<b>Input:</b>	120-277 VAC, 50/60Hz
<b>Dimming:</b>	ELV: 100-5% , TRIAC: 100-5%
<b>Light Source:</b>	Integrated LED
<b>Lens:</b>	Frosted TIR lens
<b>Rated Life:</b>	50,000 Hours
<b>Mounting:</b>	Heavy gauge retention clips secures fixture to ceiling, Heavy gauge retention clips secures fixture to ceiling
<b>Cut Out:</b>	4"
<b>Finish:</b>	Electrostatically Powder Coated: White, Black
<b>Ceiling Thickness:</b>	1/2" - 1 1/2"
<b>Operating Temp:</b>	-4°F to 104°F (-20°C to 40°C)
<b>Standards:</b>	ETL, cETL, Wet Location Listed, Title 24 JA8 Compliant, Airtight, IC



#### FINISHES:



#### LINE DRAWING

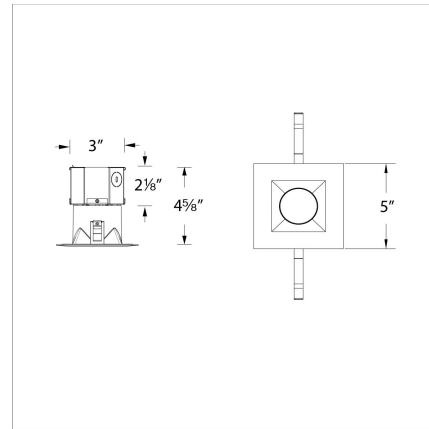


# WAC LIGHTING

## Pop-In 4" Square 5CCT

Remodel Downlight

Fixture Type: \_\_\_\_\_  
Catalog Number: \_\_\_\_\_  
Project: \_\_\_\_\_  
Location: \_\_\_\_\_

### ACCESSORIES

	<i>Model</i>	<i>Description</i>	<i>Finish</i>
	R4DRDN-FRAME	Pop-In 4"	