

RADIONIC INDUSTRIES, INC.

Customer Part #:	
Vendor:	RADIONIC
R.I. Catalog #:	C115D
Start method:	PREHEAT
Connection type:	LEADS
Input voltage:	120VAC
Frequency:	60Hz

Production Specifications:

Lamp Class	LPS #	Rated Lamp (W)	Min. Start Temp (F)	B.F. %	Input (w) ANSI	B.E.F.	Input Current (RATED)	Power Factor	LCCF	% THD
F15T8	1	15	50	0.91	20	4.55	0.35A	0.55	1.5	<10

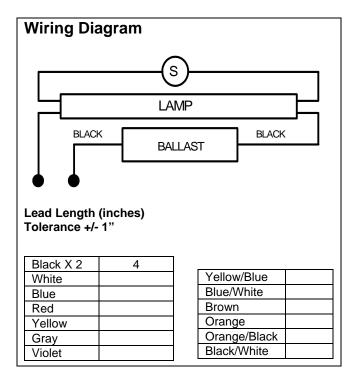



Enclosure Dimension (inches)

Length	Width	Height	Mounting	
(L):	(W):	(H):	(M):	
2-13/16	1-1/4	1-5/8	2-3/8	

Safety	UL	CSA	CE	CUL	Other
	619L	LISTED			

These are test results under laboratory conditions and are supplied without charge at your request. We do not guarantee the accuracy of these results, nor do we represent or warranty products to achieve these same results under field conditions. We recommend you repeat these tests before purchasing. See our complete warranty for details. msw\rc\balspec-1/28/02