

## HID HID RETROFIT (CCT3)

PROJECT: \_\_\_\_\_

SCHEDULE: \_\_\_\_\_ DATE: \_\_\_\_\_

PREPARE BY: \_\_\_\_\_

NOTES: \_\_\_\_\_

### DESCRIPTION

naturaLED® High Quality LED Retrofit Kits have been designed specifically for your existing HID fixtures. Delivering up to 2X higher lumens and efficacy compared to retrofits using generic LED kit. Utilizing high-efficiency LEDs and reliable drivers will save you time, energy, and money! Mounting options and adjustability for Indoor and Outdoor applications to fit various fixture types. Available in 3 Color Selectable or CCT in 5000K. Wide and even light distribution is a perfect replacement to use for existing fixtures: Shoebox, High Bay, Low Bay, Flood, Wall Pack and much more. Easy replacements for existing metal halide HID, high-pressure sodium, or mercury vapor light bulbs and ballasts.



**Rated Life 50,000 Hours**  
**Warranty 5 Years**

### APPLICATIONS

Warehouse , Security, Pathway, Street, Area Lighting

### FEATURES

- DLC Premium Qualified
- ETL Listed
- Retrofit any high/low bay, wall pack, flood light & area light
- ColorTemp: 3CCT, 5000K
- Dimmable: 0-10V
- Input line voltage: 100-277V
- CRI 80
- Surge Protection: 4KV
- Power Factor: >0.9
- Beam Angle: 120°
- Yoke mount included with adjustable position
- Operating temperature: -40°F - 140°F
- 5 Year Warranty
- Finish: Black
- Optional Accessories for Purchase: Adapter, Surge Protector, 277-480V Drivers

### ACCESSORIES

	E26 socket
	E39 sockets (included for all models)
	Surge Protector
	277-480V Drivers

SAMPLE NUMBER		RKIT50HID/8CCT3		
SERIES	WATTAGE	REPLACEMENT	CRI	COLOR TEMP
RKIT Retrofit Kit	50 50 Watt	HID Metal Halide HID	8 CRI 80	CCT3 Color Temperature (3000K/4000K/5000K)



# HID RETROFIT (CCT3)

## WALL & AREA LUMINAIRES

### ORDERING

\*P= Premium DLC / \*S = Standard DLC

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equiv. Wattage (W)	Size	Dim (V)	DLC (S/P)
50	<b>9600</b>	RKIT50HID/8CCT3	3CCT (3/4/5K)	6,367	250-400	3.0"x4.80"	0-10V	P
100	<b>9601</b>	RKIT100HID/8CCT3	3CCT (3/4/5K)	12,978	400	3.0"x4.80"	0-10V	P
180	<b>9602</b>	RKIT180HID/850	5000K	24,496	400-575	5.79"x4.80"	0-10V	P
240	<b>9603</b>	RKIT240HID/850	5000K	32,170	750-1000	5.79"x4.80"	0-10V	P

### ACCESSORIES (Ordered Separately)

#### Base



P10374 MT-RKIT-E26  
(Mount E26 Adapter for HID Retrofit)



E39 Socket (INCLUDED)  
(Included with HID Retrofit)

#### Driver



Driver  
(Included with HID Retrofit)

#### Surge Protector



P10389 SPD-L-10KV-277  
(Surge Protection 10KV 120-277V)



P10390 SPD-L-20KV-277  
(Surge Protection 20KV 120-277V)

#### Driver (277-480V)






P10448 BALED-SS-100M-56BH  
(277-480V Driver for RKIT100W #9601)




P10447 BALED-SS-240M-56BH  
(277-480V Driver for RKIT180W and  
RKIT240W #9602,#9603)

### DIMENSIONS

50W  
100W

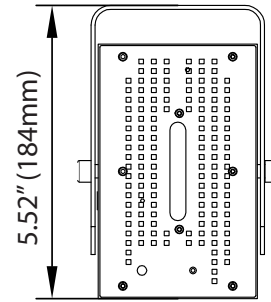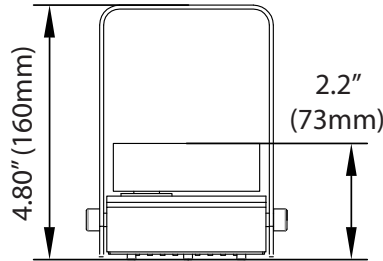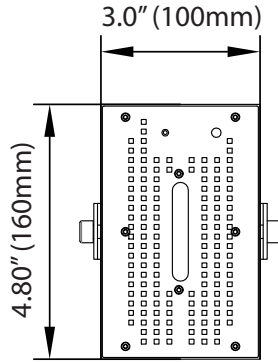


180W  
240W

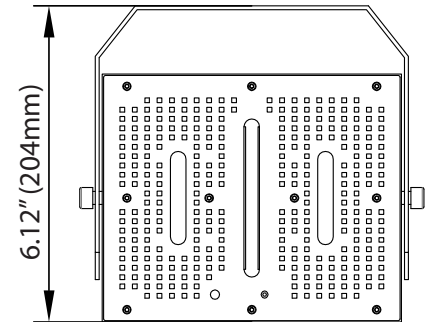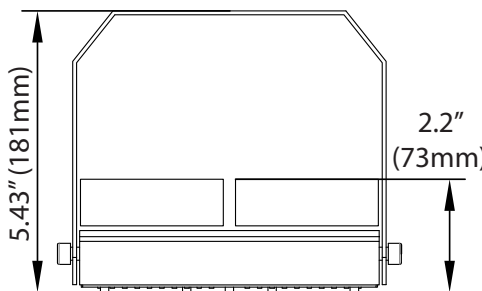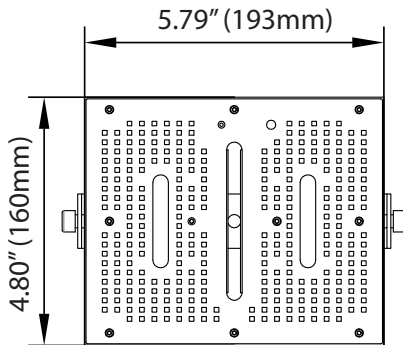

### PHOTOMETRICS CHART


50 Watt  
DLC Premium

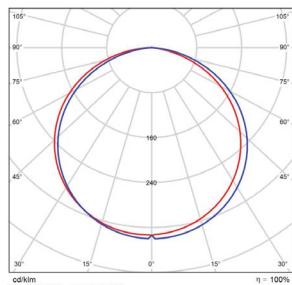

Illuminance at a Distance			
	Center Beam fc	Beam Width	
4.3R	148 fc	13.8 ft	14.1 ft
8.7R	36.2 fc	27.9 ft	28.4 ft
13.0R	16.2 fc	41.7 ft	42.5 ft
17.3R	9.16 fc	55.5 ft	56.5 ft
21.7R	5.82 fc	69.6 ft	70.9 ft
26.0R	4.06 fc	83.4 ft	85.0 ft

Vert. Spread: 116.1°  
Horiz. Spread: 117.1°


100 Watt  
DLC Premium

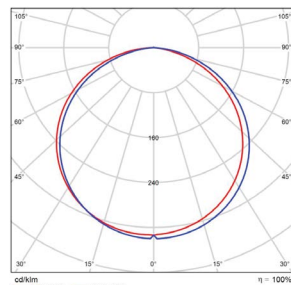

Illuminance at a Distance			
	Center Beam fc	Beam Width	
4.3R	289 fc	13.8 ft	14.1 ft
8.7R	70.7 fc	27.9 ft	28.4 ft
13.0R	31.6 fc	41.7 ft	42.5 ft
17.3R	17.9 fc	55.5 ft	56.5 ft
21.7R	11.4 fc	69.6 ft	70.9 ft
26.0R	7.91 fc	83.4 ft	85.0 ft

Vert. Spread: 116.1°  
Horiz. Spread: 117.1°


180 Watt  
DLC Premium

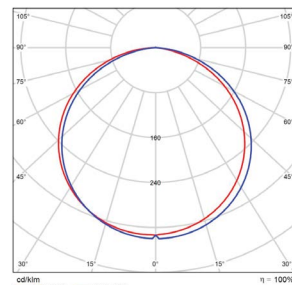

Illuminance at a Distance			
	Center Beam fc	Beam Width	
4.3R	522 fc	13.8 ft	14.1 ft
8.7R	127 fc	27.9 ft	28.4 ft
13.0R	57.1 fc	41.7 ft	42.5 ft
17.3R	32.2 fc	55.5 ft	56.5 ft
21.7R	20.5 fc	69.6 ft	70.9 ft
26.0R	14.3 fc	83.4 ft	85.0 ft

Vert. Spread: 116.1°  
Horiz. Spread: 117.1°

240 Watt  
DLC Premium

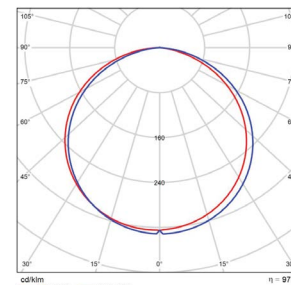

Illuminance at a Distance			
	Center Beam fc	Beam Width	
4.3R	677 fc	13.8 ft	14.1 ft
8.7R	165 fc	27.9 ft	28.4 ft
13.0R	74.0 fc	41.7 ft	42.5 ft
17.3R	41.8 fc	55.5 ft	56.5 ft
21.7R	26.6 fc	69.6 ft	70.9 ft
26.0R	18.5 fc	83.4 ft	85.0 ft

Vert. Spread: 116.1°  
Horiz. Spread: 117.1°

### PACKAGE

Case Qty 1 pc

