

SBX001-100W-XxW-105A-A

Low Profile Shoebox Area Light, 100W
100~277Vac, (Natural & Pure White)
(with Slipfitter Pole-Top Mounting Arm)



DWG BY:
SYT / MM / HF
09-28-15

R&D:
UF
01-15-20

QA:
SB
01-15-20

MFG:
LD
01-15-20

REVISION LTR: -
ECR#: 011520-HF01
01-15-20

○ Features


Operating Temperature	-30°C to +45°C
Storage Temperature	-40°C to +50°C
Housing Material / Color	Aluminum Alloy / Bronze
ETL/cETL Listed	4001379 (SBX001-100W-XXW-105A-X)
DLC Listed	Yes
LED LM80 Report	Yes
LM79 Report	Yes
LED Qty.	48 pcs.
Protection Rating	IP65
Warranty	5 Years
Weight	14.9 lbs. / 6.8 kg.




○ Electro-Optical Characteristics

Part Number	SBX001-100W-XNW-105A-A	SBX001-100W-XPW-105A-A
Input Voltage (typ)	100~277Vac	100~277Vac
Tested @ (Voltage)	120Vac	120Vac
Power Consumption	98 W	98 W
Current Consumption	0.85 A	0.85 A
Efficacy: (Lm/W)	95	100
Lumens	9,315 lm	9,780 lm
Max Ft-Cd	4,321 cd	4,321 cd
Power Factor	0.93	0.92
CRI (Ra)	74	75
CCT	4000K	5000K
Color	Natural White	Pure White
Viewing Angle @ 50% Intensity	120°	120°
DLC Product ID	P1ZUC4CE	P3SEJF6B


○ Dimensions

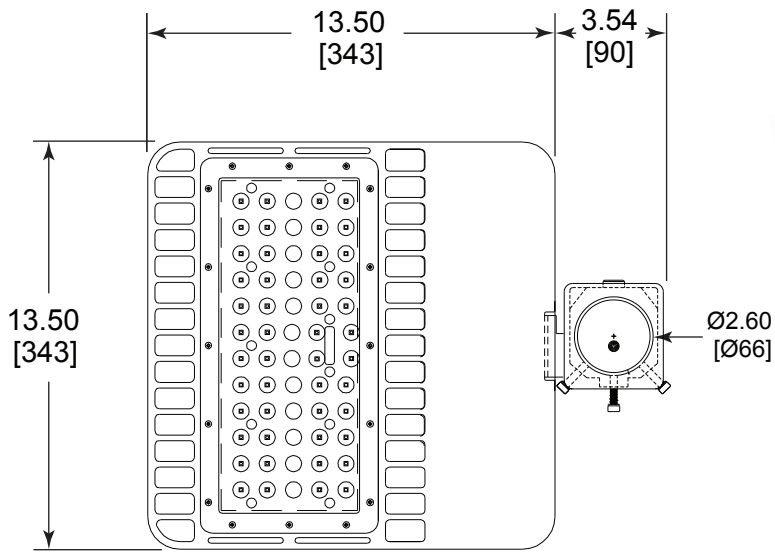

BOTTOM VIEW

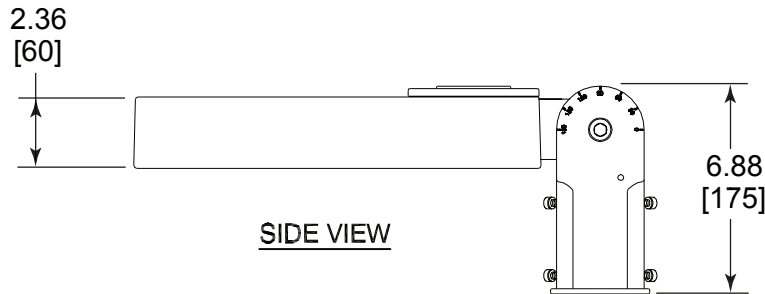


SIDE VIEW

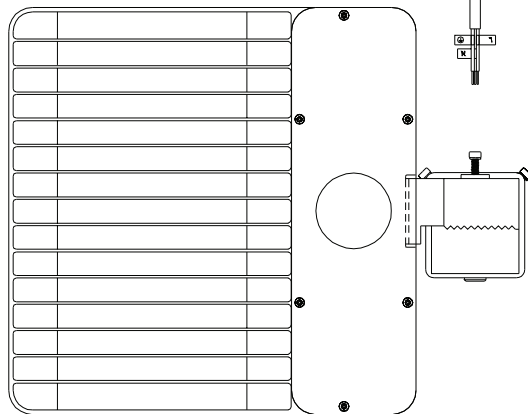

TOP VIEW

Installation:
“-A-” Mounting Arm Adaptor
(Pole Ø60 mm)

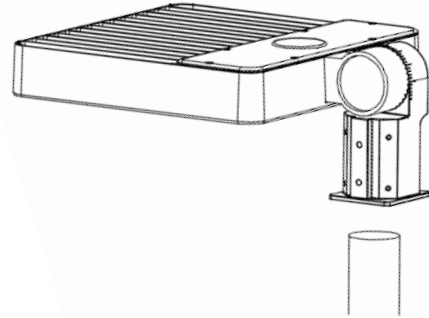

Tolerance:

XXX +/- .010

XX +/- .025

Notes:

1. All Dimensions are in Inches [Millimeters].