


LTR	REVISION	DATE	APPD
-	RELEASED	06-18-15	



NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. SLEEVE MATERIAL: GENERAL POLYMERS RYNITE FR530 (UL 94HB)
3. BASE MATERIAL: E10/12 NICKEL - PLATED BRASS

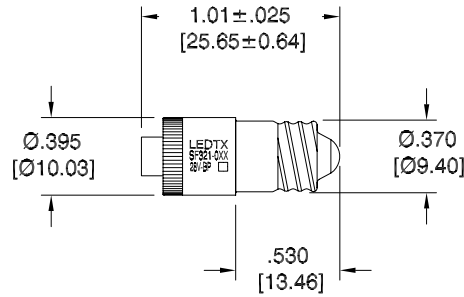

REVISION NOTIFICATION	
<input type="checkbox"/>	DLC
<input type="checkbox"/>	UL/ETL
<input type="checkbox"/>	MADE IN USA
<input type="checkbox"/>	CUSTOMER _____
<input type="checkbox"/>	OTHER

ELECTRICAL-OPTICAL CHARACTERISTICS (Ta = 25°C)

LEDTRONICS PART NO.	COLOR EMITTED	INPUT VOLTAGE, V	POWER (W)	CURRENT (A)	MAXIMUM CANDELA	λP nm COLOR TEMP. (K)	VIEWING ANGLE (FULL BEAM WIDTH AT 50% INTENSITY)
SF321-0AG-028B	AQUA GREEN	28Vdc	0.42 W	0.015 A	0.400cd	520	85°
SF321-0CW-028B	COOL WHITE	28Vdc	0.42 W	0.015 A	0.160cd	8000K	95°
SF321-0UR-028B	ULTRA RED	28Vdc	0.42 W	0.015 A	0.085cd	652	80°
SF321-0UY-028B	SUPER YELLOW	28Vdc	0.42 W	0.015 A	0.075cd	593	85°



-PROPRIETARY-
 This document contains Proprietary information of LEDTRONICS, INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC.

.XXX ± .010 TOLERANCE PER ANSI-Y14.5 (UNLESS OTHERWISE STATED)
 .XX ± .025
 ANGLES ± 0°,30'
 FRACT. ± 1/32

TITLE SF321-0XX-028B							
DWG NO SF321-28V-BP		SCALE 1:1		SHEET 1 OF 1		DATE 06-18-15	
CODE IDENT NO. 8Z410	DWG BY GP 06-18-15	CHK BY PL 06-18-15	QA	MFG	R&D		