



LTR	REVISION	DATE	APPD
A	SEE ECR#100316-EE01	10-11-16	GP

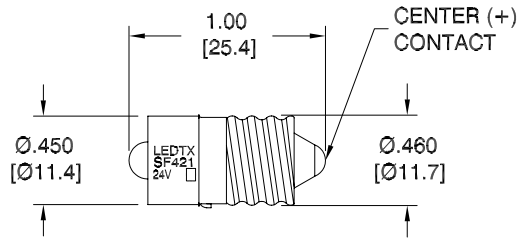

SF421CW2KB-24V-P

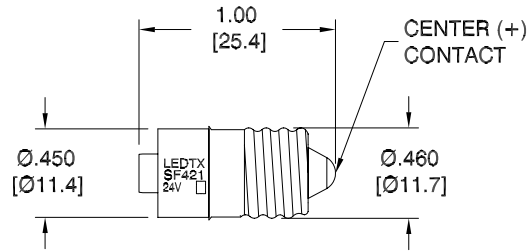

NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. SLEEVE MATERIAL: RYNITE
3. BASE MATERIAL: BRASS, NICKEL-PLATED BRASS

**FULL BEAM WIDTH @ 50% INTENSITY

REVISION NOTIFICATION	
<input type="checkbox"/> DLC	
<input type="checkbox"/> UL/ETL	
<input type="checkbox"/> MADE IN USA	
<input type="checkbox"/> CUSTOMER _____	
<input type="checkbox"/> OTHER	
REDLINE CHECKLIST	
<input type="checkbox"/> REDLINE(YES)	
<input type="checkbox"/> DATE: _____	
<input type="checkbox"/> INITIATED BY: _____	
<input type="checkbox"/> ECR REQUIRED YES <input type="checkbox"/> NO <input type="checkbox"/>	
<input type="checkbox"/> WORK ORDER# _____	

ELECTRICAL - OPTICAL CHARACTERISTICS (Ta = 25°C)

SF421-0U0-024P	SUPER ORANGE	24Vdc	0.019 A	610	-	90°
SF421-0UR-024P	ULTRA RED	24Vdc	0.019 A	652	-	80°
SF421-1AG-024P	AQUA GREEN	24Vdc	0.015 A	520	-	90°
SF421CW2KB-24V-P	TRUE WHITE	24Vdc	0.017 A	-	4400K~4700K	105°
LEDTRONICS PART NO.	COLOR EMITTED	INPUT VOLTAGE, V	CURRENT (A)	λP nm	COLOR TEMP. (Kelvin)	VIEWING ANGLE**



-PROPRIETARY-
 This document contains Proprietary information of LEDTRONICS, INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC.
 .XXX ± .010 TOLERANCE PER ANSI-Y14.5 (UNLESS OTHERWISE STATED)
 .XX ± .025
 ANGLES ± 0°,30'
 FRACT. ± 1/32

TITLE					
SF421-XXX-024P SF421CW2KB-24V-P					
DWG NO	SCALE	SHEET	DATE		
SF421-24V-P	1:1	1 OF 1	05-20-08		
CODE IDENT NO.	DWG BY	CHK BY	QA	MFG	R&D
8Z410	GP		JH	LD	LUV
	05-20-08		10-11-16	10-11-16	10-11-16