Atlanta Light Bulbs, Inc.
1-888-988-2852
www.atlantalightbulbs.com


MAXLITE™
ENERGY EFFICIENT LIGHTING PRODUCTS

PRODUCT FOCUS

MINICANDLE

Compact Fluorescent Lamp

FOR >> CHANDELIERS
>> WALL SCONCES
>> AMBIENT DECORATIVE FIXTURES

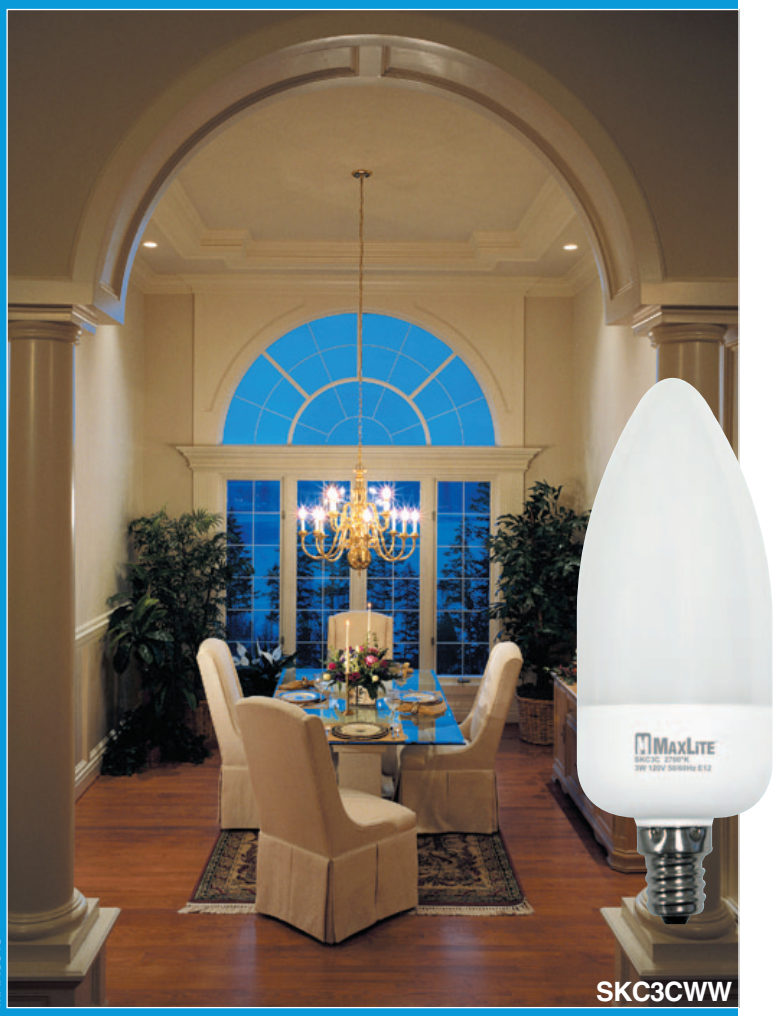



SKC5EWW
SKC7EWW
SKC7ECW



SKC5CWW
SKC5CDL
SKC7CWW
SKC7CCW

- Decorative shape and ultra-small size fit most standard and smaller fixtures
- Edison and candelabra base available
- Saves up to 75% in ENERGY COSTS
- Long Life – lasts 6,000 hours
- Instant-on, flicker-free electronics

MaxLite™ 1-800-555-5629 | Fax: 973-244-7333 | info@maxlite.com | www.maxlite.com

MAX6045

Atlanta Light Bulbs, Inc.
1-888-988-2852
www.atlantalightbulbs.com

MAXLITE™
ENERGY EFFICIENT LIGHTING PRODUCTS

PRODUCT FOCUS

MINICANDLE

Compact Fluorescent Lamp



SKC3CWW 6,000 Hour (7) 6762720340 (4)*
SKC5CWW 6,000 Hour (7) 6762720540 (8)*
SKC5EWW 6,000 Hour (7) 6762720550 (7)*
SKC7CWW 6,000 Hour (7) 6762720740 (2)*
SKC7EWW 6,000 Hour (7) 6762720750 (1)*
SKC5CDL 6,000 Hour (7) 6762720541 (5)*
SKC7CCW 6,000 Hour (7) 6762720761 (7)*
SKC7ECW 6,000 Hour (7) 6762720760 (0)*

MINICANDLE SPECIFICATIONS

Watts	Order Code	Description	Incandescent Equivalent	Lumens	Lamp Life (Hrs)	Pack Type	Case Pack	Dimensions (W" x MOL")	K
3	20340	SKC3CWW Candle E12 Base	20	135	6,000	Box	24	1.5 x 4.4	2700
5	20540	SKC5CWW Candle E12 Base	25	220	6,000	Box	24	1.5 x 4.9	2700
5	20550	SKC5EWW Candle	25	220	6,000	Box	24	1.5 x 4.9	2700
5	20541	SKC5CDL Candle E12 Base / Daylight	25	220	6,000	Box	24	1.5 x 4.9	5000
7	20740	SKC7CWW Candle E12 Base	30	300	6,000	Box	24	1.5 x 4.9	2700
7	20750	SKC7EWW Candle	30	300	6,000	Box	24	1.5 x 4.9	2700
7	20761	SKC7CCW Candle E12 Base / Cool White	30	300	6,000	Box	24	1.5 x 4.9	4100
7	20760	SKC7ECW Candle Cool White	30	300	6,000	Box	24	1.5 x 4.9	4100

SPECIAL NOTES

>> Not for use on circuits with dimmers, timers, or other control devices.

APPLICATIONS

- Chandeliers
- Wall Sconces
- Ambient Decorative Lighting

LOCATIONS

- Residential
- Restaurant
- Retail
- Hotel/Motel
- Property Management

BENEFITS

- Decorative shape and ultra-small size fit most standard and smaller fixtures
- Edison and candelabra base available
- Saves up to 75% in energy costs
- Long Life – lasts 6,000 hours
- Instant-on, flicker-free electronics
- Soft natural light with excellent color rendering

SPECIFICATIONS

- Ballast Type >> Electronic
- Starting Method >> Modified Rapid Start
- Input Line Voltage >> 120VAC
- Input Line Frequency >> 50/60HZ
- Mini. Starting Temp. >> 0°F
- Max. Operating Temp. >> 100°F
- Color Rendering Index >> 84

MAX6045

c UL us LISTED

FCC Certified
ISO 9002 Certified

*UPC Codes