



LTR	REVISION	DATE	APPD
B	052213-GP01: ADDED P/N (SIW) & UPDATED NOTES	05-22-13	GP

SLF467-SIW-120A-UL
SLF467-XIW-120A-UL

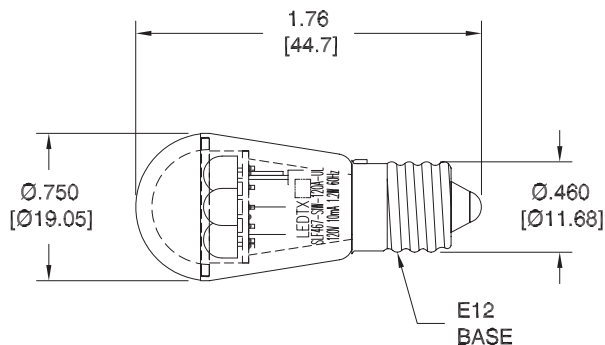

SLF467-XCW-120A-UL

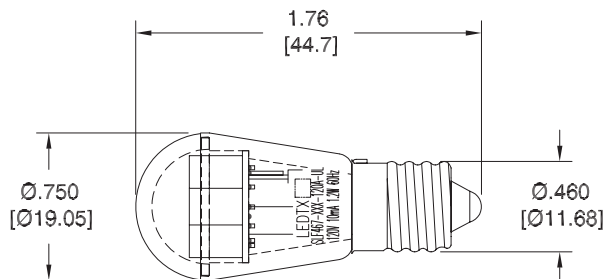

Intertek



NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. UL E305539
3. LENS MATERIAL: WATER CLEAR, UV STABILIZED POLYCARBONATE, UL LISTED
4. SLEEVE MATERIAL: WATER CLEAR, UV STABILIZED POLYCARBONATE, UL LISTED
5. BASE MATERIAL: BRASS, NICKEL PLATED BRASS
6. LIFE: 50,000 HRS. MINIMUM

REVISION NOTIFICATION

- ☐ PMA
- ☒ UL/ETL
- ☐ MADE IN USA
- ☐ CUSTOMER _____
- ☐ OTHER

ELECTRO-OPTICAL CHARACTERISTICS

SLF467-SIW-120A-UL	WARM WHITE	120VAC	0.008 A	0.8-1.2 W	est. 4cd	2800K~3200K	120°
SLF467-XCW-120A-UL	COOL WHITE	120VAC	0.008 A	0.8-1.2 W	—	8000K	120°
SLF467-XIW-120A-UL	WARM WHITE	120VAC	0.008 A	0.8-1.2 W	est. 4cd	2800K~3200K	120°
LEDTRONICS PART NO.	COLOR EMITTED	INPUT VOLTAGE, V	CURRENT (A)	POWER (W)	MAXIMUM CANDELA	COLOR TEMP. (Kelvin)	VIEWING ANGLE (FULL BEAM WIDTH @ 50% INTENSITY)

LED[®]
LEDTRONICS,™ INC.
23105 KASHIWA COURT
TORRANCE, CA 90505

-PROPRIETARY-
This document contains Proprietary
information of LEDTRONICS, INC.
It may not be copied, used or disclosed
for any purpose without the prior express
written consent of LEDTRONICS, INC.

.XXX ± .010 TOLERANCE PER ANSI-Y14.5
.XX ± .025 (UNLESS OTHERWISE STATED)
ANGLES ± 0°,30'
FRACT. ± 1/32

TITLE

SLF467-XXW-120A-UL

DWG NO	SCALE	SHEET	DATE
SDBD1363-CUST	1:1	1 OF 1	11-03-08
CODE IDENT NO. 8Z410	DWG BY GP 11-03-08	CHK BY PL 05-23-13	QA MFG R&D BJ 05-23-13