


LTR	REVISION	DATE	APPD
A	011012-PL01: UPDATED DWG.	01-10-12	GP

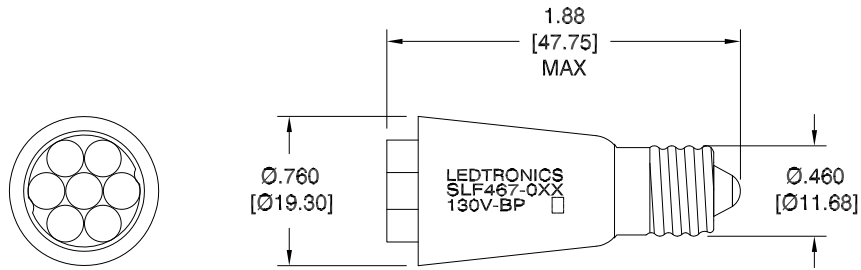

NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. SLEEVE MATERIAL: RYNITE FR530
3. BASE MATERIAL: NICKEL PLATED BRASS

SLF467-OCW-130B	COOL WHITE	130VDC	10	0.595 cd	BIPOLAR DC (+/-)	68-70	8000K	90°
SLF467-OUR-130B	ULTRA RED	130VDC	10	0.280 cd	BIPOLAR DC (+/-)	-	650	85°
LEDTRONICS PART NO.	COLOR EMITTED	INPUT VOLTAGE, V	INPUT CURRENT (mA)	MAXIMUM CANDELA	CENTER CONTACT POLARITY	CRI	λP nm	VIEWING ANGLE (FULL BEAM WIDTH AT 50% INTENSITY)
ELECTRICAL TEST								

<p style="text-align: center;">-PROPRIETARY-</p> <p style="font-size: small;">This document contains Proprietary information of LEDTRONICS, INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC.</p> <p style="font-size: x-small;">.XXX ± .010 TOLERANCE PER ANSI-Y14.5 .XX ± .025 (UNLESS OTHERWISE STATED) ANGLES ± 0°,30' FRACT. ± 1/32</p>	<p style="text-align: center;">TITLE</p> <h2 style="text-align: center;">SLF467-OXX-130B</h2>							
	<p>DWG NO</p> <p>SLF467-130V-BP</p>		<p>SCALE</p> <p>1:1</p>		<p>SHEET</p> <p>1 OF 1</p>		<p>DATE</p> <p>04-16-07</p>	
	<p>CODE IDENT NO.</p> <p>8Z410</p>	<p>DWG BY</p> <p>MM</p> <p>04-16-07</p>	<p>CHK BY</p> <p>PL</p> <p>01-10-12</p>	<p>QA</p>	<p>MFG</p>	<p>R&D</p>		