



23105 Kashiwa Court, Torrance, CA 90505  
Phone: (800) 579-4875 or (310) 534-1505 Fax: (310) 534-1424  
E-mail: info@ledtronics.com  
Website: http://www.ledtronics.com

## SLL002PH-060W-0CW-103A

LED Street Light; Ø60mm Pole Mounting; IP66  
100~277Vac; Cool White (5700K); 60W  
Angle of illumination: Type III



DWG BY:  
SHO / GP / HF  
10-22-20

R&D:  
UF  
06-23-22

MFG:  
LD  
06-24-22

QA:  
SB  
06-24-22

REVISION LTR: PRELIMINARY (2)  
ECR#: 062222-UF01  
06-22-22


**○ Features**

Operating Temperature	-30°C to +60°C
Heatsink Temperature	-
Housing Material / Color	Die-Cast Aluminum / Silver Gray
Lens Material / Color	Glass / Clear
UL / cUL Listed	E363359 (SPS60-SL30-XX-Z-Y)
LED LM80 Report	-
LM79 Report	-
LED Type / Qty.	Philips Lumileds SMD3030 / 144 pcs.
Protection Rating	IP66
Dimmable	No
Lifespan	54,000 hrs.
Warranty	7 Years
Weight	11.28 lbs. / 5.12 kg


**○ Electro-Optical Characteristics**

Part Number	SLL002PH-060W-0CW-103A
Input Voltage (typ)	100~277Vac
Tested @ (Voltage)	120Vac
Power Consumption	60 W
Current Consumption	0.5 A
Efficacy: (Lm/W)	146
Lumens	8,752 lm
Maximum Candela	3,265 cd
Power Factor	0.9647
CRI (Ra)	72.6
CCT	5700K
Color	Cool White
Angle of illumination	Type III

○ Dimensions

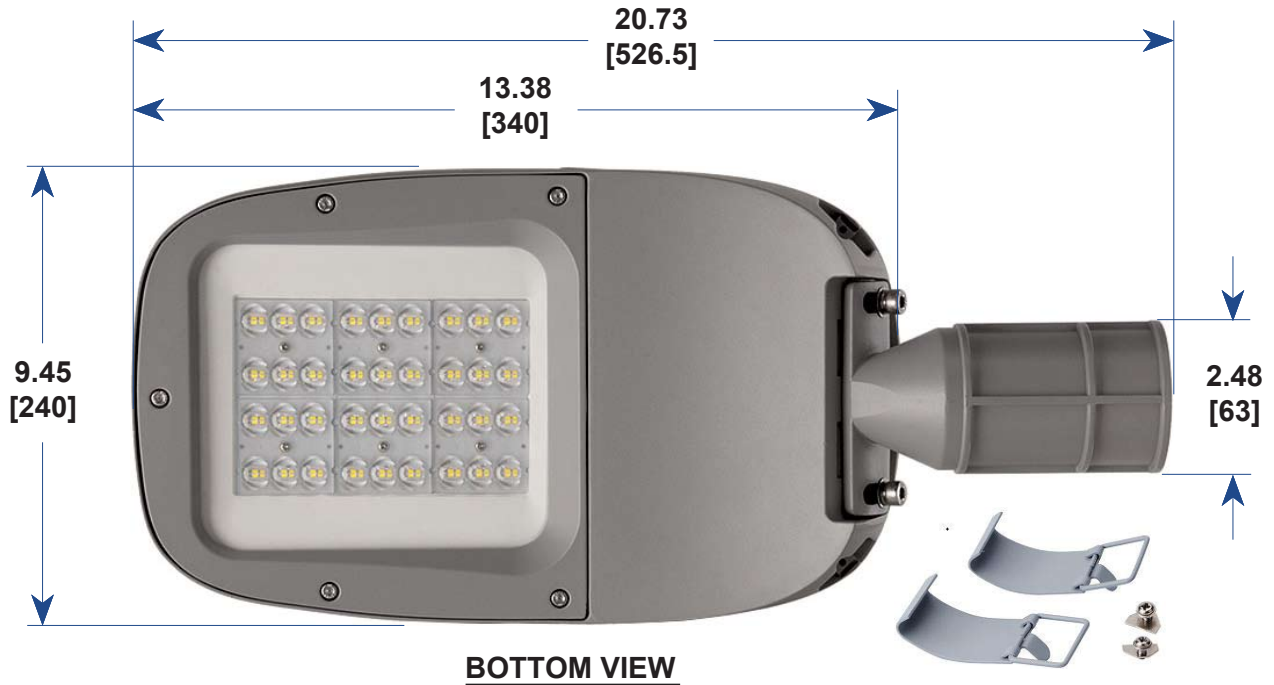

**Tolerance:**

XXX +/- .010

XX +/- .025

**Note:**

1. All Dimensions are in Inches [Millimeters].