

# LEDVANCE Luminaires

## DUAL SELECTABLE SLIM WALL PACK

PERFORMANCE CLASS

### Application

The Slim Wall Pack is a versatile fixture which can be used as a full cutoff wall pack as well as adjustable up to 90 degrees. The Slim Wall Pack has two different selectable wattages as well as CCT selectable in 3000K, 4000K, or 5000K. Applications include schools, warehouses, municipal buildings, and commercial buildings.

### Benefits and Features

- DLC 5.1 Premium Listing provides high energy efficiency and optimizes this product for utility rebates
- Offered in selectable wattage, 30 and 60W maximum – set to max at factory
- Adjustable up to 90 degrees
- Up to 140 LPW
- 3000K, 4000K, 5000K selectable color temperature, set to 4000K at factory
- CRI >80

### Electrical

- 120-277VAC and 120-347VAC
- Power Factor >90%
- THD <20%
- 0-10V dimmable
- Surge protection: 4kV

### Rated Life

- 150,000 hours (L<sub>70</sub>)

### Warranty

- 5-year
- NLB Trusted Warranty Program

### Operating Temperature

- -40°F to +104°F (-40°C to +40°C)

### Certifications and Listings

- cULus wet location rated
- RoHS
- FCC
- DLC 5.1 Premium
- IP65



### Wattage Comparison

Traditional Source	Traditional System Wattage	LED System Wattage	Energy Savings
23W CFL	23	10	57%
100W Incandescent	100	10	90%
150W Incandescent	150	20	87%
50W HPS	62	20	68%
70W HPS	91	20	67%
150W Incandescent	150	30	80%
50W HPS	62	30	52%
70W HPS	91	30	67%
70W HPS	91	45	56%
100W HPS	120	45	67%
100W MH	130	45	69%
150W HPS	170	60	65%
150W MH	188	60	68%
175W MH	210	60	71%

### Installation

- Luminaires mount to exterior wall
- Fully adjustable up to 90 degrees

### Physical Information

Lamp Description	Length (in)	Width (in)	Height (in)	Weight (lbs)
SLIM WALL PACK	7.3	4.9	7.8	6.5



Catalog #	Type
Project	
Comments	
Prepared by	

**Ordering Guide**

SLMWPKC	3A	/	XOXX	UNX	D	8	SC2	/	BZ	X
Product Name	Generation		Wattage	Voltage	Dimming	CRI	Selectable Color Temp		Color/Finish	Option
SLMWPKC = SLIM WALL PACK	3A = Generation 3A		030 = 30W S030 = 10W/20W/30W S060 = 30W/45W/60W	UNH = 120-347V UNV = 120-277V	D = 0-10V dimming	8 = >80	SC2 = 3000K/4000K/5000K		BZ = Bronze Finish BL = Black Finish WH = White Finish	P = Photocell D = Daylight/Motion Sensor

**Ordering Information**

Item Number	Ordering Abbreviation	Power (W)	Input Voltage (V)	Dimming	CRI	Color Temp.	Distribution	BUG Rating	Total Fixture Lumens	LPW	DLC	Options	MTO*
62878	SLMWPKC3A/S030UNHD8SC2/BZP	10/20/30W	120-347	0-10V	>80	3000K/4000K/5000K	Full Cutoff/Adjustable	B1U0G1	1400/2800/4200	140	5.1 Premium	Photocell	-
62879	SLMWPKC3A/S060UNHD8SC2/BZP	30/45/60W	120-347	0-10V	>80	3000K/4000K/5000K	Full Cutoff/Adjustable	B2U0G1	4200/6300/8400	140	5.1 Premium	Photocell	-
62880	SLMWPKC3A/030UNVD8SC2/BZP	30W	120-277	0-10V	>80	3000K/4000K/5000K	Full Cutoff/Adjustable	B1U0G1	3750	125	5.1 Premium	Photocell	-
63071	SLMWPKC3A/S030UNHD8SC2/BZD	10/20/30W	120-347	0-10V	>80	3000K/4000K/5000K	Full Cutoff/Adjustable	B1U0G1	1400/2800/4200	140	5.1 Premium	Daylight/Motion Sensor	MTO
63072	SLMWPKC3A/S060UNHD8SC2/BZD	30/45/60W	120-347	0-10V	>80	3000K/4000K/5000K	Full Cutoff/Adjustable	B2U0G1	4200/6300/8400	140	5.1 Premium	Daylight/Motion Sensor	-
63843	SLMWPKC3A/030UNVD8SC2/BLP	30W	120-277	0-10v	>80	3000K, 4000K, 5000K	Full Cutoff/Adjustable	B1U0G1	3750	125	5.1 Premium	Photocell	-
63844	SLMWPKC3A/030UNVD8SC2/WHP	30W	120-277	0-10v	>80	3000K, 4000K, 5000K	Full Cutoff/Adjustable	B1U0G1	3750	125	5.1 Premium	Photocell	-
63839	SLMWPKC3A/S030UNHD8SC2/BLP	10/20/30W	120-347	0-10v	>80	3000K, 4000K, 5000K	Full Cutoff/Adjustable	B1U0G1	1400/2800/4200	140	5.1 Premium	Photocell	-
63840	SLMWPKC3A/S030UNHD8SC2/WHP	10/20/30W	120-347	0-10v	>80	3000K, 4000K, 5000K	Full Cutoff/Adjustable	B1U0G1	1400/2800/4200	140	5.1 Premium	Photocell	-
63841	SLMWPKC3A/S060UNHD8SC2/BLP	30/45/60W	120-347	0-10v	>80	3000K, 4000K, 5000K	Full Cutoff/Adjustable	B2U0G1	4200/6300/8400	140	5.1 Premium	Photocell	-
63842	SLMWPKC3A/S060UNHD8SC2/WHP	30/45/60W	120-347	0-10v	>80	3000K, 4000K, 5000K	Full Cutoff/Adjustable	B2U0G1	4200/6300/8400	140	5.1 Premium	Photocell	-

\*Made To Order

**Optional Microwave Sensor Information**



The natural light threshold, hold time and stand by dimming level can be adjusted with the remote control. If motion is detected and the natural light level is lower than the threshold, the light will turn on. Light will turn off after the stand by period is completed.



**SPECIFICATIONS**

Power supply	12V-24V DC
HF S stem	5.8GHz±75MHz
Dim control output	0-10V, max. 25mA sinkin current
Detection radius/an le	Max 26ft. 8m /360 0
Mounting height	Max 40ft
Remote range	50ft. (15m) indoor, no backlight
Humidity	Max. 95% RH
Temperature	-40 0 F - 158 0 F (-40 0 C - 70 0 C)

**SENSOR COVERAGE**

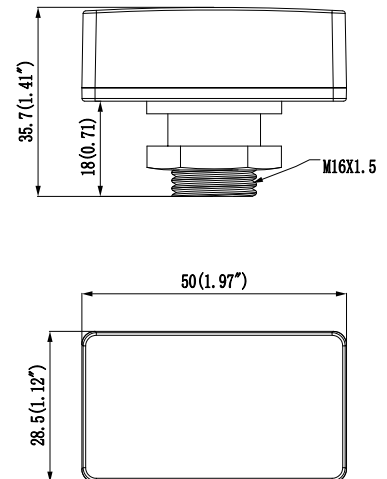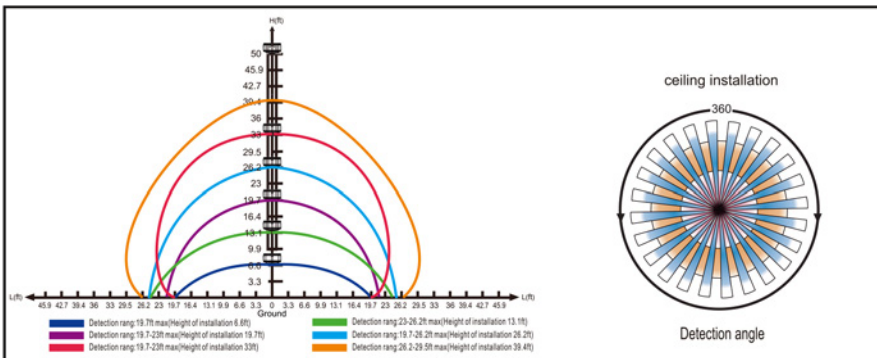


## Accessories


Item Number	Ordering Abbreviation	Description
62298	SMWLPK2AREMOTE	Daylight sensor remote

## Photometric Information


**SLIMWP2AS30UNH-15FT**




**SLIMWP2AS30UNH-20FT with 30° tilt**



**SLIMWP2AS60UNH-20FT**



**SLIMWP2AS60UNH-25FT with 30° tilt**

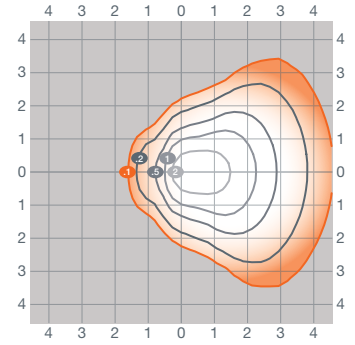

LEDVANCE LLC  
 181 Ballardvale Street, Suite 203  
 Wilmington, MA 01887 USA  
 Phone 1-800-LIGHTBULB (1-800-544-4828)  
[www.ledvanceUS.com](http://www.ledvanceUS.com)

LEDVANCE is a registered trademark. All other trademarks are those of their respective owners. Specifications subject to change without notice.



SCAN TO FOLLOW US  
ON SOCIAL MEDIA

