


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

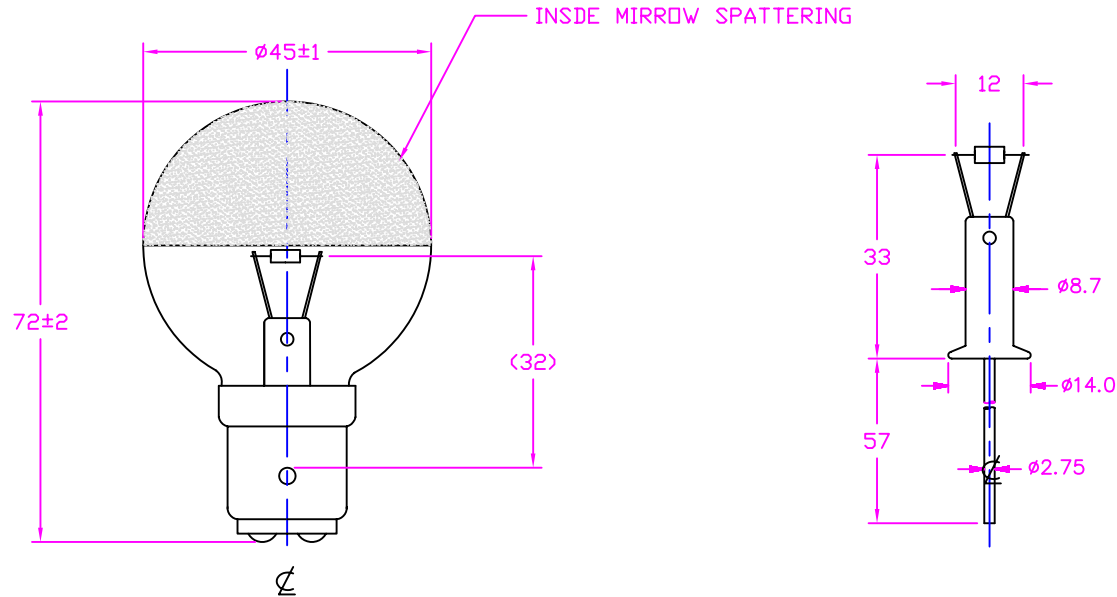

NOTES:

1. ALL DIMENSIONS ARE IN MM.
2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS			
VOLTAGE	24 V		
WATTAGE	50±5 W		
TOTAL LUMEN	(750 Lm)		
EFFICIENCY	(15.0 Lm/W)		
BASE TYPE	BX22D		
AVERAGE LIFE	1000 HRS	NEXT ASSY	USED ON
FILAMENT TYPE	CC-6	APPLICATION	

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS	
LIST OF MATERIALS						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± .XXX ± ANGLES ± DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		CONTRACT NO.		USHIO AMERICA, INC. 5440 Cerritos Avenue Cypress, CA 90630 TITLE SM-16678 SCIENTIFIC MEDICAL LAMP		
		APPROVALS				DATE
		DRAWN	R.AMPARO			03/29/00
		CHKD	D.GILCZYNSKI			03/29/00
		ENGR				
MATERIAL COMPOSITE		MFG				
		QUAL				
		DSGN ACTVY				
FINISH	GOV'T ACTVY		SIZE	CODE IDENT NO.	DWG NO.	
B			8000105			
			SCALE	WEIGHT	SHEET	
			NONE		1 OF 1	