


REVISIONS

REV	DESCRIPTION	DATE	APPROVED
-----	-------------	------	----------

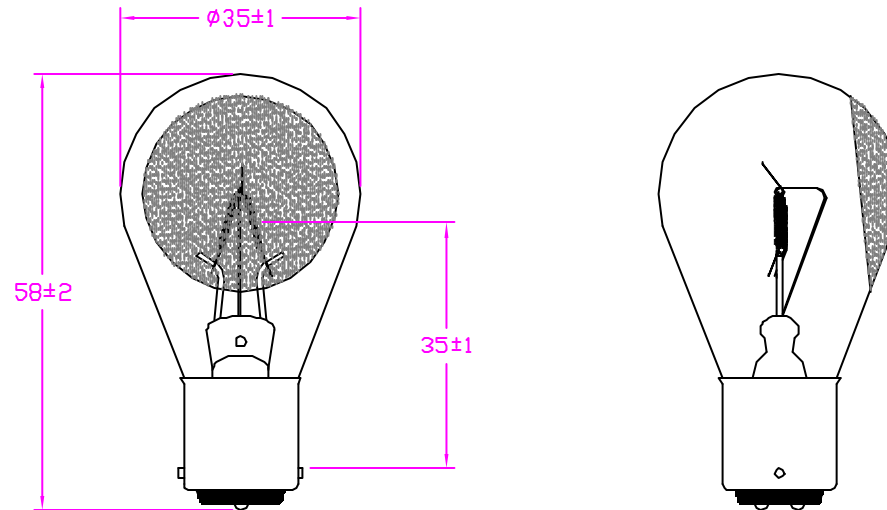

NOTES:

1. ALL DIMENSIONS ARE IN MM.
2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± .XXX ± ANGLES ± DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING			CONTRACT NO.		
			APPROVALS		
			DATE		
			DRAWN R.AMPARO		
			CHKD J.COOPER		
MATERIAL COMPOSITE			ENGR		
			MFG		
			QUAL		
FINISH			DSGN ACTVY		
			GOVT ACTVY		
			TITLE		
			USHIO AMERICA, INC.		
			5440 Cerritos Ave. Cypress, CA 90501		
			SIZE		
			B		
			CODE IDENT NO.		
			DWG NO.		
			8000298		
			SCALE		
			NONE		
			WEIGHT		
			SHEET		
			1 OF 1		

CHARACTERISTICS	
VOLTAGE	120 V
WATTAGE	20 W
BASE TYPE	BA15d/19
FILAMENT TYPE	CC-2V-2
AVERAGE LIFE	500 HRS
BULB	S-35 SB

NEXT ASSY	USED ON

APPLICATION