


SOX 35W~180W LPS

LED Replacement Lamps


NEW !

SOX LED Replacement for Street Lights, Shoeboxes & Wall Packs

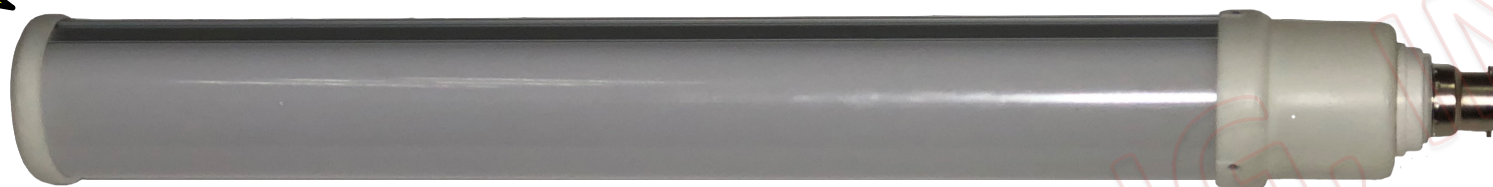

Ballast By-Pass

Direct Wire – UL Type B



US Patent Pending

- 5-Years/50,000 Hrs. Warranty^(*) •
- High Power Factor • Self Ballasted •
- Suitable for Open & Enclosed Fixtures •
- Built-in Surge Suppressors & Transient Protection •

Model	Product	Size	Power	Flux	Equivalent
SOX35-20W ^B -22K-B22R	SOX35 LED Lamp 20W 22K B22	Ø2 ⁵ / ₈ x 12 ¹ / ₄ "	20W Typ.	3,000 lm	SOX35W LPS
SOX55-40W ^B -22K-B22R	SOX55 LED Lamp 40W 22K B22	Ø2 ⁵ / ₈ x 16 ³ / ₄ "	40W Typ.	4,900 lm	SOX55W LPS
SOX90-65W ^B -22K-B22R	SOX90 LED Lamp 65W 22K B22	Ø2 ⁵ / ₈ x 20 ³ / ₄ "	65W Typ.	8,800 lm	SOX90W LPS
SOX135-80W ^B -22K-B22R	SOX135 LED Lamp 80W 22K B22	Ø2 ⁵ / ₈ x 30 ¹ / ₂ "	80W Typ.	10,200 lm	SOX135W LPS
SOX180-100W ^B -22K-B22R	SOX180 LED Lamp 100W 22K B22	Ø2 ⁵ / ₈ x 44"	100W Typ.	12,000 lm	SOX180W LPS

- 120-277Vac ~50/60Hz • P.F. > 0.9 • THD < 20% • B22 Double-Contact Bayonet Base • 120~150 lm/W •
- (*) Rated Life 50,000 Hrs. (L₇₀ B₅₀) at T_A 25°C Max. • CCT 2200K (22K) ±10% • CRI > 70 •

SOX 35W~180W LPS

LED Replacement Lamps

SOX LED Replacement for Street Lights, Shoeboxes & Wall Packs



Ballast By-Pass / Direct Wire – UL Type B

Model	Product	Packing	Power	Flux	Equivalent
SOX35-20WB-22K-B22R	SOX35 LED Lamp 20W 22K B22 Rotating Direct Wire Ballast By-Pass UL Type B	10PK CTN: 9Lb. (4Kg.) 15x15x7½"	20W Max.	3,000 lm	SOX35W LPS LS-35-BY22d
SOX55-40WB-22K-B22R	SOX55 LED Lamp 40W 22K B22 Rotating Direct Wire Ballast By-Pass UL Type B	10PK CTN: 11Lb. (5Kg.) 19x15x7½"	40W Max.	4,900 lm	SOX55W LPS LS-55-BY22d
SOX90-65WB-22K-B22R	SOX90 LED Lamp 65W 22K B22 Rotating Direct Wire Ballast By-Pass UL Type B	10PK CTN: 13Lb. (6Kg.) 23x15x7½"	65W Max.	8,800 lm	SOX90W LPS LS-90-BY22d
SOX135-80WB-22K-B22R	SOX135 LED Lamp 80W 22K B22 Rotating Direct Wire Ballast By-Pass UL Type B	10PK CTN: 18Lb. (8Kg.) 32x15x7½"	80W Max.	10,200 lm	SOX135W LPS LS-135-BY22d
SOX180-100WB-22K-B22R	SOX180 LED Lamp 100W 22K B22 Rotating Direct Wire Ballast By-Pass UL Type B	10PK CTN: 24Lb. (11Kg.) 46x15x7½"	100W Max.	12,000 lm	SOX180W LPS LS-180-BY22d

- 120-277Vac ~50/60Hz • P.F. > 0.9 • THD < 20% • B22 Double-Contact Bayonet Base • 120~150 lm/W •
- (*) Rated Life 50,000 Hrs. (L₇₀ B₅₀) at T_A 25°C Max. • CCT 2200K (22K) ±10% • CRI > 70 •