

SS22WSTP	
Ballast Type	Magnetic
Starting Method	Preheat Start
Lamp Connection	--
Input Voltage	120Vac +5% -10%
Input Frequency	60Hz

ELECTRICAL SPECIFICATIONS:

Lamp Type	No. of Lamp	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD %
FC6T9 20W	1	20	0.35	0.458	1.68	0.79	3.95	20
FC8T9 22W	1	19	0.27	0.586	1.58	0.79	4.16	15

PERFORMANCE:


- Sound Rated: A
- Minimum Starting Temperature: 50°F, 10°C
- Maximum Ballast Case Temperature: 194°F, 90°C

APPROVALS:

- UL & cUL 935 Listed (Class P, Outdoor, Type 1)
- Thermally Protected

PHYSICAL DIMENSIONS:

Length (L):	3.10"
Width (W):	1.89"
Height (H):	1.42"
Mounting (M):	2.75"
Lead Length:	
White	12"
Black	12"
Blue	9"
Red	9"
Yellow	9"

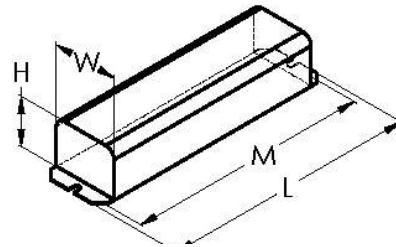

WIRING DIAGRAM:

