


DEVICE NAME : BHF 1770 NAS
Mechanical Data :

Page # : 1 of 1
Date : 05/07/2003
ISSUED BY : De Pan
Rev Date : Index #:

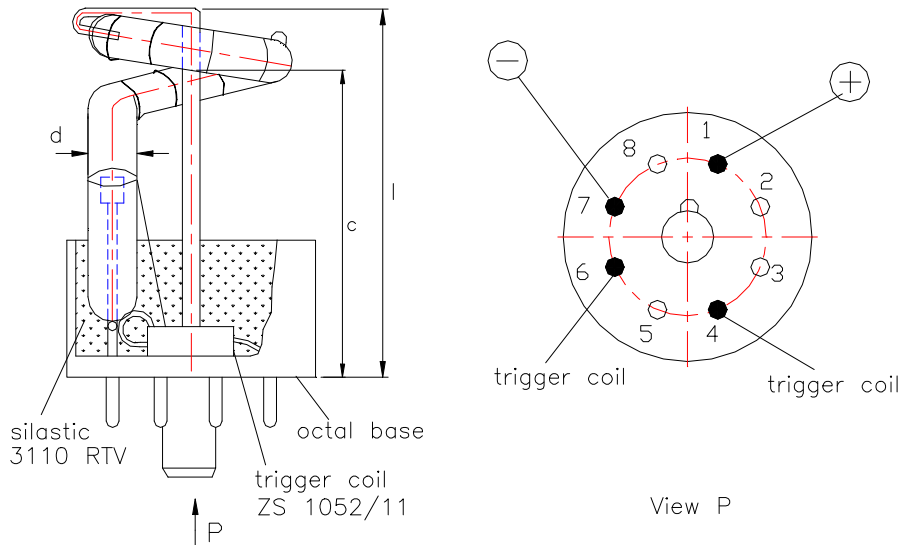

Dimension(mm)

e		l	47.5 max	d	7.0 \pm 0.5 dia.
r		g		x	
c	36 \pm 1.5				

Polarity :

Colour Corrective Coating :

Remarks:

Operating Data :

Max. Power Pmax/W		Trigger coil TR	ZS 1052
Nom. Power Pnom / W		Trigger capacitor Cz/ μF	0.22
Max. flashenergy Emax/Ws	25	Min. trigger voltage Uz min/V	175
Nom. flashenergy Enom/Ws	10	Trigger contact S	SCR
Max. anode voltage Uamax/V	600	Flash frequency/Hz	0.3-4
Nom. anode voltage Uanom/V	300	Life/Number of flashes/N	3000
Min. anode voltage Uamin/V	175	Repetition rate trep/ s	
Nom.flash capacitor CB/ μF		Sec trigger voltage Uz sec / KV	-7.0
Light reduction after life/ %			

Remarks : Functional test in Customer circuit DF 1250 (double flashing)
PCB no. : ST 1250 REV 1.

