

SYLVANIA Luminaires

ValueLED™ Dual Selectable Strip 1B

Application

These SYLVANIA CCT and wattage selectable ValueLED Strip 1B fixtures are ideal in new or retrofit installations. They can be used in retail, manufacturing, warehouse, office, education, low-bay, and general lighting applications.

Benefits and Features

- High efficiency LED light source
- 2-foot , 4-foot, and 8-foot versions
- Three wattage selections per type:
 - 2ft; 10/15/20W selectable
 - 4ft; 20/30/40W selectable
 - 8ft; 40/60/80W selectable
- Diffuse acrylic lens delivers smooth, even illumination
- White powder-coated metal body
- Light engine and lens module feature toolless removal and secure snap-fit for fast, efficient installation
- Knock-outs on both ends of fixture facilitate through wiring
- External Microwave Motion/Daylight sensor and Internal Battery Back-up options
- Optional joiner bracket facilitates end-to-end mounting
- DLC 5.1 Standard listed for rebate opportunities
- Up to 117 LPW
- 3500K, 4000K or 5000K selectable
- CRI >80
- Energy savings up to 64%

Electrical

- 120-277V_{AC}
- Power Factor >0.9
- THD <20%
- 0-10V dimmable down to 10%

Rated Life

- 75,000 hours (L₇₀)

Warranty

- 5-year
- NLB Trusted Warranty Program

Operating Temperature

- -4°F to +104°F (-20°C to +40°C)

Item #
Type
Project
Notes
Date



Wattage Comparison

Traditional Source	Traditional System Wattage	LED System Wattage	Energy Savings
1X32W T8	28	10	64%
2X28W T8	49	20	59%
2X32W T8	56	30	46%
3X28W T8	64	40	38%
3X32W T8	75	50	47%
2X54W T5	87	60	31%
4X28W T8	97	70	38%
4X32W T8	112	80	29%

Certifications and Listings

- cULus
- RoHS
- FCC
- DLC 5.1
- UL damp location rated

Installation

- Can be surface mounted or suspended
- V-hook included
- Fixtures can be joined end-to-end using the optional joiner bracket



Ordering Guide

STRIP	1B	/ SXXX	UNV	D	8	SC7	/ XX	S	/ WH	/ XX
Product Name	Generation	Selectable Wattage	Voltage	Dimming	CRI	Color Temp	Length	Mounting	Color/Finish	Options
STRIP = Strip luminaire	1B = Generation	S020 = 10, 15 or 20W S040 = 20, 30 or 40W S080 = 40, 60 or 80W	120-277V	D = 0-10V	8 = >80	SC7 = 3500, 4000 or 5000K	24 = 24" 48 = 48" 96 = 96"	S = Surface mount	WH = White	D = Daylight/Motion Sensor E = Emergency Battery Back-Up DE = Daylight/Motion Sensor + Emergency Battery Back-Up


Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Input Voltage (V)		Dimming	CRI	Color Temperature	Total Fixture Lumens (lm)		LPW	Size	DLC	Options	MTO*
			Voltage	Dimming				Lumens	LPW					
62351	STRIP1B/S020UNVD8SC7/24S/WH	10/15/20	120-277V	0-10V	>80	3500/4000/5000K	1150/1725/2300	116	2ft	Std	-	-	-	
62352	STRIP1B/S040UNVD8SC7/48S/WH	20/30/40	120-277V	0-10V	>80	3500/4000/5000K	2300/3450/4600	116	4ft	Std	-	-	-	
62353	STRIP1B/S080UNVD8SC7/96S/WH	40/60/80	120-277V	0-10V	>80	3500/4000/5000K	4600/6900/9200	117	8ft	Std	-	-	-	
62422	STRIP1B/S020UNVD8SC7/24S/WH/D	10/15/20	120-277V	0-10V	>80	3500/4000/5000K	1150/1725/2300	116	2ft	Std	Motion/Daylight Sensor**	MTO		
62423	STRIP1B/S040UNVD8SC7/48S/WH/D	20/30/40	120-277V	0-10V	>80	3500/4000/5000K	2300/3450/4600	116	4ft	Std	Motion/Daylight Sensor**	MTO		
62424	STRIP1B/S080UNVD8SC7/96S/WH/D	40/60/80	120-277V	0-10V	>80	3500/4000/5000K	4600/6900/9200	117	8ft	Std	Motion/Daylight Sensor**	MTO		
62425	STRIP1B/S040UNVD8SC7/48S/WH/E	20/30/40	120-277V	0-10V	>80	3500/4000/5000K	2300/3450/4600	116	4ft	Std	Emergency Battery Back-up***	MTO		
62426	STRIP1B/S080UNVD8SC7/96S/WH/E	40/60/80	120-277V	0-10V	>80	3500/4000/5000K	4600/6900/9200	117	8ft	Std	Emergency Battery Back-up***	MTO		
62427	STRIP1B/S040UNVD8SC7/48S/WH/DE	20/30/40	120-277V	0-10V	>80	3500/4000/5000K	2300/3450/4600	116	4ft	Std	Motion/Daylight Sensor* + Emergency Battery Back-up***	MTO		
62428	STRIP1B/S080UNVD8SC7/96S/WH/DE	40/60/80	120-277V	0-10V	>80	3500/4000/5000K	4600/6900/9200	117	8ft	Std	Motion/Daylight Sensor* + Emergency Battery Back-up***	MTO		

*Made To Order
 **Motion Sensor settings can only be changed using a Remote Control.
 ***EMBB Provides 900 lumens for 90 minutes.


Physical Information

Description	(A) Length (in)	(B) Width (in)	(C) Height (in)
2ft	24.02	2.05	2.48
4ft	48.00	2.05	2.48
8ft	95.98	2.05	2.48

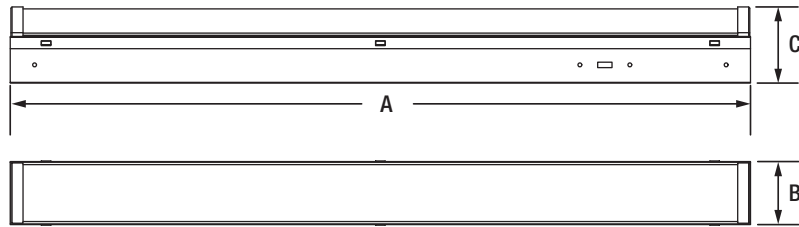


Photometric Data

20W 2ft

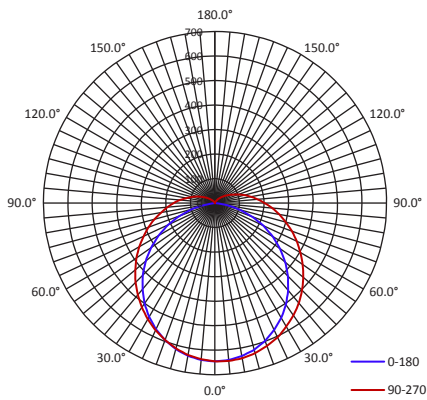

40W 4ft

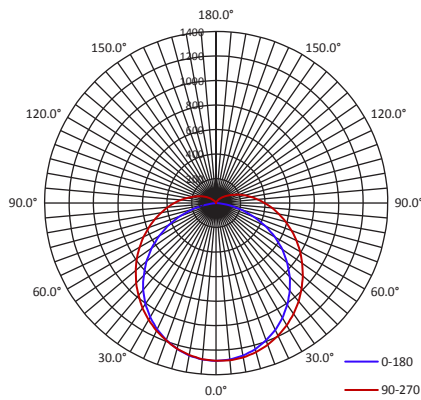

Accessory Information

Item Number	Ordering Abbreviation	Description
62358	STRIP1B/JOINBRKT	End-to-End joiner bracket
60105	HIBAY2A/REMOTE*	Standard Remote Control for motion sensor
65305	STRIP2A/REMOTE*	Remote Control with digital readout for sensors

*Motion Sensor settings can only be changed using a Remote Control.

62358 Joiner Bracket



65305 Sensor Remote




Optional Motion Detector Information (default settings*)

Detection Area	100%
Hold Time	5 minutes
Daylight Threshold	50 lux
Stand-by Period	30 minutes
Stand-by Dimming Level	30%

*Motion Sensor settings can only be changed using a Remote Control.

Detection Range*

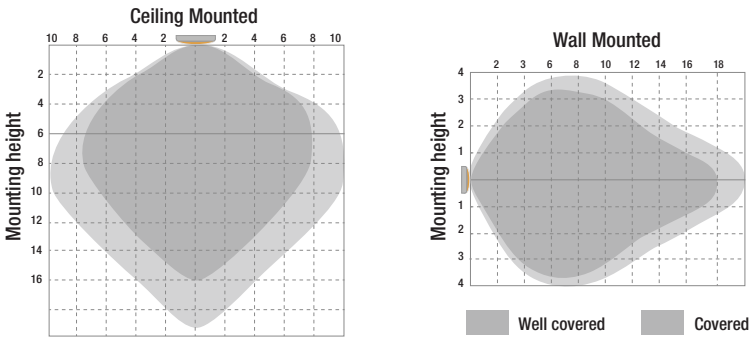

*the units for the detection range charts indicate 'meters.'

LEDVANCE LLC
 200 Ballardvale Street
 Wilmington, MA 01887 USA
 Phone 1-800-LIGHTBULB (1-800-544-4828)
 www.ledvanceUS.com

SYLVANIA and LEDVANCE are registered trademarks.
 All other trademarks are those of their respective owners.
 Licensee of product trademark SYLVANIA in general lighting.
 Specifications subject to change without notice.

[/sylvania](#) [/sylvania](#)

Name: _____
 Email: _____
 Phone: _____

