



Suitable for Energy Star Residential Lighting Fixture Application

- UL, cUL Listed
- Sound Rated A
- Lamp Current Crest Factor < 1.70
- Power Factor > 0.50 SL EB Photo
- End of Lamp Life Protection
- Outdoor Type 1
- FCC Class B
- Can Size #3: 3.82" L x 2.00" W x 1.20" H
Mounting Center: 3.50"
- Can Size #4: 6.00" L x 1.78" W x 1.08" H
Mounting Center - 5.75"

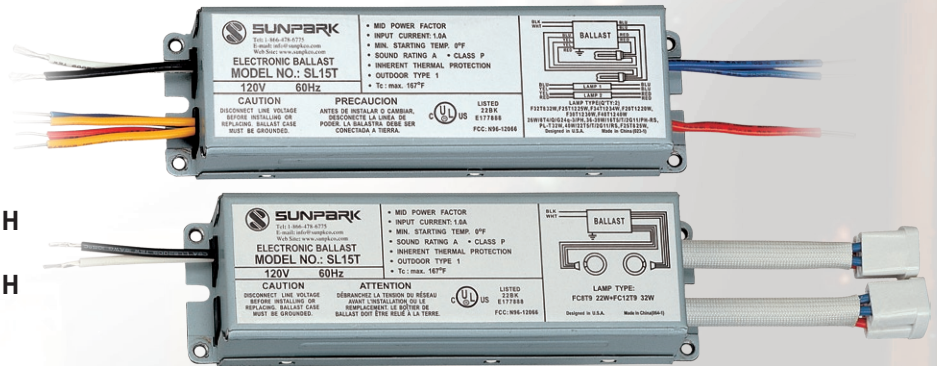

2 Lamps Mid Power Factor Rapid Start

Order Code	Model	Input Voltage	Lamp Type / Wattage	Input Wattage	Line Amps	Ballast Factor	Can Size
113060	SL15T	120V	F32 T8, 32W	64	1.07	> 0.88	#4
			25W/34W/40W T12	54	0.90		
			F25 T8,	54	0.90		
			CFQ26W, Quad	52	0.87		
			CFM32W, Triple	62	1.03		
			36W / 39W TT 2G11	62	1.03		
113061	SL15T-1 (with Circline Lamp Plugs)	120V	40W TT, 2G11	62	1.03	> 0.88	#4
			FC8T9 22W + FC12T9 32W Circline	54	0.90		
			2 pcs FC8T9 22W	44	0.73		
113070	SL26T (with Circline Lamp Plugs)	120V	FC12T9 32W + FC16T9 40W Circline or 2 pcs	68	1.13	> 0.88	#4
			2 pcs FC12T9 32W	60	1.00		
113080	SL27T	120V	CFQ13W, Quad	26	0.43	> 0.88	#4
			CFQ18W, Quad	34	0.57		
			F17 T8, 17W	32	0.53		
			F20T12, 20W	34	0.57		
113081	LC120-2/13MPF	120V	CFQ13W, Quad	26	0.43	> 0.88	#3
113082	LC120-2/18MPF	120V	CFQ18W, Quad	34	0.57	> 0.88	#3

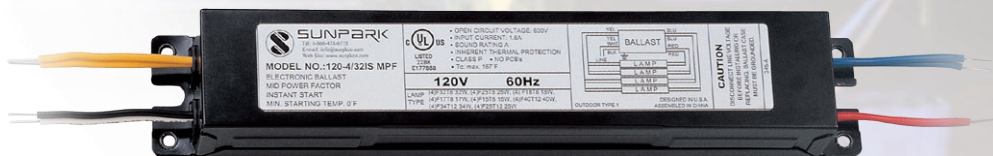

- Can Size # 1: 9.50" L x 1.63" W x 1.13" H Mounting Center: 8.91"

T8 / T12 Mid Power Factor Instant Start

Order Code	Model	Input Voltage	Lamp Qty	Lamp Type / Wattage	Input Wattage(typ)	Line Amps	Can Size
113110	120-2/32IS MPF	120V	2	F32T8, F25T8, F17T8, F15T8, F18T8, F25T12, F34T12, F40T12	58	0.97	#1
113120	120-3/32IS MPF	120V	2		90	1.50	
113130	120-4/32IS MPF	120V	2		106	1.77	
113121	120-3/17IS MPF	120V	2		50	0.83	