


ProPoint® Outdoor Luminaires

LED Small Light Pack



Dimensions

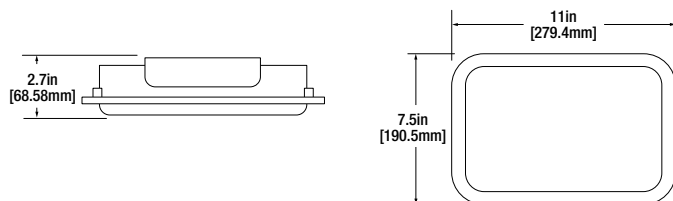

Product Features

The LED Small Light Pack luminaires improve outdoor illumination with significant energy and maintenance savings. Ideal in place of new and existing traditional luminaires, the SLP series is offered in two levels of LED power for illuminating stairwells, canopies, outdoor walkways and corridors.

ProPoint luminaires assure optimum light engine performance for extended service and rated life (70,000 Hrs/ L₇₀). These environmentally preferable LED luminaires use up to 67% less energy than traditional lighting. The fixture is also IP66 rated so that a simple hose-down removes the dirt and grime that impedes illumination and jeopardizes pedestrian safety.

Catalog #	
Type	
Project	
Notes	
Date	

Specifications

Weight: 5.8lbs

Construction: One-piece cast, low-copper (<0.4%CU) aluminum alloy. It has a TGIC thermoset polyester powder coat paint, 2.5 mil nominal thickness. The standard color is black.

LED Systems: LED system with a life rating of 70,000 hours at L₇₀.

Electrical: Offered in 15 and 30 Watts, the luminaire is designed to operate through the 120-277Vac universal voltage range. The High Power Factor (PF >90% @ 120-240V and >85% @ 277V), low total harmonic distortion (THD <20% @ 120V and <25% @ 220-277V) constant current LED driver features built-in over temperature protection.

Color Characteristics: CRI>70; CCT of 4500K or 6000K.

Optics: Light distribution is Type V with a single piece of opal, UV-stabilized, highly durable polycarbonate.

Installation: Luminaire mounts to recessed outlet box or can be surface-mounted. Light Pack is designed with a hanging bracket feature that allows the luminaire to be suspended during installation, which allows both hands to be free for wiring.

Operating Temperature: -30°C to 40°C.

Listings: IP66 outdoor location rated, UL1310, FCC and RoHS Compliant and UL listed for wet locations – US and Canada, tested in accordance with IEEE C62.41-2002 Category A.

Warranty: Standard OSRAM 5-year luminaire warranty.

Note: Specifications subject to change without notice. IES files available online.



Ordering Guide


Item Number:

SLP	XX	7	XX	UNV	BL
SLP= Small Light Pack	Wattage 15= 15 Watts 35= 35 Watts	CRI 7=70+	Color Temp 45=4500K 60=6000K	Voltage UNV= 120-277V	Finish BL=Black



Photometric Data

ProPoint® Small Light Pack: 15 W, 4500K
Maximum Candela = 374.3

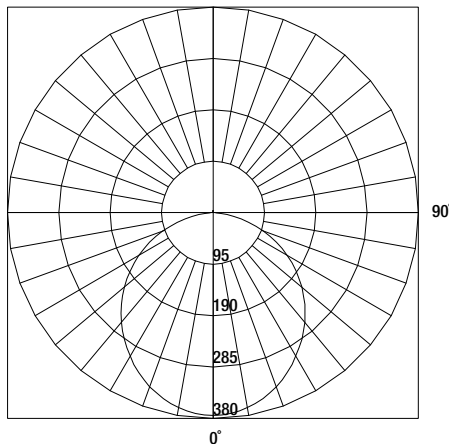

Ordering Information

Item Number	Ordering Abbreviation	Power (W)	CRI	Color Temp (CCT)	Distribution	Total Fixture Lumens	Lumens per Watt (LPW)	BUG Rating
70883	SLP-L-15-745-T5-UNV-BL	15	70+	4500K	Type V	1000	68	B1-U1-G1
70885	SLP-L-15-760-T5-UNV-BL	15	70+	6000K	Type V	900	51	B1-U2-G1
70884	SLP-L-30-745-T5-UNV-BL	30	70+	4500K	Type V	1900	63	B1-U2-G1
70886	SLP-L-30-760-T5-UNV-BL	30	70+	6000K	Type V	1700	51	B1-U2-G1

OSRAM

Americas Headquarters

OSRAM SYLVANIA Inc.

100 Endicott Street

Danvers, MA 01923 USA

Phone 1-800-LIGHTBULB (1-800-544-4828)

www.osram-americas.com

OSRAM is a registered trademark of OSRAM GmbH.
ProPoint is a registered trademark of OSRAM SYLVANIA Inc.
Specifications subject to change without notice.

