



**Technical Specifications (continued)**

**Performance**

**Lifespan:**

60,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

**Wattage Equivalency:**

Equivalent to (3) F17T8

**Other**


**5 Yr Limited Warranty:**

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

**Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

**Dimensions**

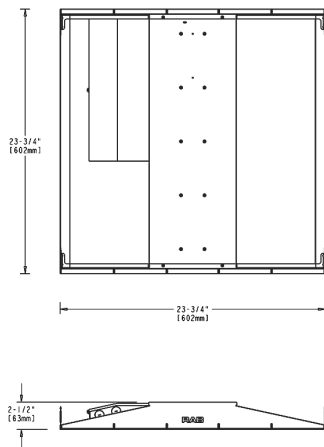

**Features**

- Optional surface and recessed mount kits available
- Optional programmable occupancy sensor for multi-level lighting control
- 0-10V dimming, standard on all models
- 60,000-hour LED lifespan
- 5-Year, limited warranty

Ordering Matrix

Family		Size		Wattage	Color Temp	Options
SWISH34	-	2X2	-	29	N	/E2

2X2 = 2' x 2'  
2X4 = 2' x 4'

19 = 19W (2' x 2')  
29 = 29W (2' x 2', 2' x 4')  
39 = 39W (2' x 4')

N = 4000K Neutral  
YN = 3500K Warm Neutral

Blank = No Option  
/E2 = Battery Backup  
/LC = Lightcloud Controller  
/LCS = Lightcloud Sensor  
/PIR = Passive Infrared Occupancy Sensor  
/LC/E2 = Lightcloud Controller w/Battery Backup  
/LCS/E2 = Lightcloud Sensor w/Battery Backup  
/PIR/E2 = Passive Infrared Occupancy Sensor w/Battery Backup