

T8 SERIES

COMMERCIAL INDOOR LIGHTING

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!


T8-EZ6-GS-4FT-18W-30K-F
T8-EZ6-GS-4FT-18W-35K-F
T8-EZ6-GS-4FT-18W-40K-F
T8-EZ6-GS-4FT-18W-50K-F

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

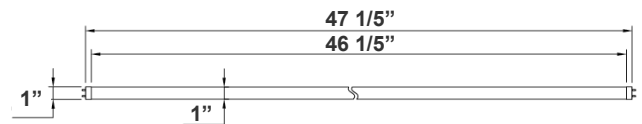

Crystal Glass T8 Tube switches from fluorescent tubes to LED, giving more cost efficiency by providing the same amount of lumen output with less energy consumption. The LED tube offers a soft and bright light distribution.

47 1/5"(L) X 1" (D)

Features

- Type A + B (Dual UL)
- Type A: With Existing Ballast - UL No. E366061
- Type B: Ballast Override (AC Direct), Connect One End or Both Ends (Dual Function) - UL No. E342884
- 5-Year Warranty
- Frosted Lens

Technical Specifications

Electrical:

- Voltage: 120-277V; 50/60Hz AC
- Power Factor: >0.90
- THD: <20%
- Wattage: 18W
- Efficacy: 120 LPW

Lighting:

- Dimming: Non Dimmable
- Total Lumens: 2160LM
- Color Temperatures: 3000K/3500K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 120°
- Rated life: 50,000 hrs

Mechanical:

- Base Type: G13
- Glass Tube: Frosted
- Ambient Operating Temperature: -13°F to 113°F
- IP Rating: IP20 (Indoor)

Applications:

- Direct Fit 4 T8 LED tubes do not burn out easily and provide bright and even lighting to schools, office spaces, retail stores and storage rooms.

Other Models:

- 18W | 2160LM | T8-EZ6-GS-4FT-18W-30K-C
- 18W | 2160LM | T8-EZ6-GS-4FT-18W-35K-C
- 18W | 2160LM | T8-EZ6-GS-4FT-18W-40K-C
- 18W | 2160LM | T8-EZ6-GS-4FT-18W-50K-C





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com | www.westgatecontrols.co




WG-Z9-Z3-ZZ

Photometrics: T8-EZ6-GS-4FT-18W



BUG Rating: B2-U2-G1

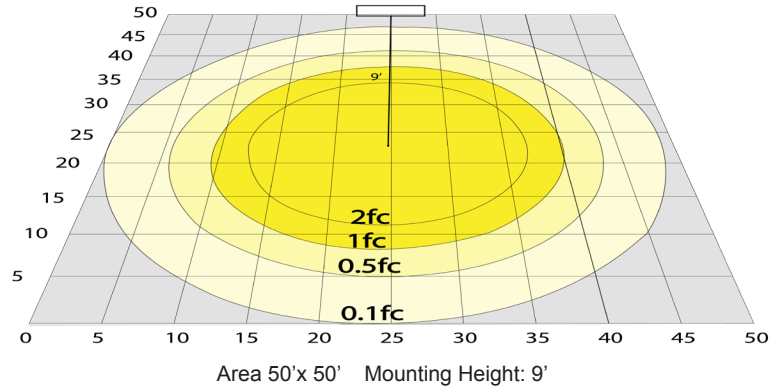


Area 50'x 50' Mounting Height: 9'

Other Views:



Close-up View



Front View



Socket View

Performance Table: T8-EZ6-GS-4FT-15W

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
T8-EZ6-GS-4FT-18W-30K-F	18W	120-277V	2160LM	3000K	B2-U2-G1	120
T8-EZ6-GS-4FT-18W-35K-F	18W	120-277V	2160LM	3500K	B2-U2-G1	120
T8-EZ6-GS-4FT-18W-40K-F	18W	120-277V	2160LM	4000K	B2-U2-G1	120
T8-EZ6-GS-4FT-18W-50K-F	18W	120-277V	2160LM	5000K	B2-U2-G1	120

Sample Ordering


Model		Material		Size		Watt		Color Temp.		Lens Type		
T8	-	EZ6	-	GS	-	4FT	-	18W	-		-	C
30K = 3000K 35K = 3500K 40K = 4000K 50K = 5000K												

Example:

1. T8-EZ6-GS-4FT-18W-30K-C

(FOR 18W 3000K T8 4FT TUBE LAMP 120-277V)

WIRING DIAGRAM:

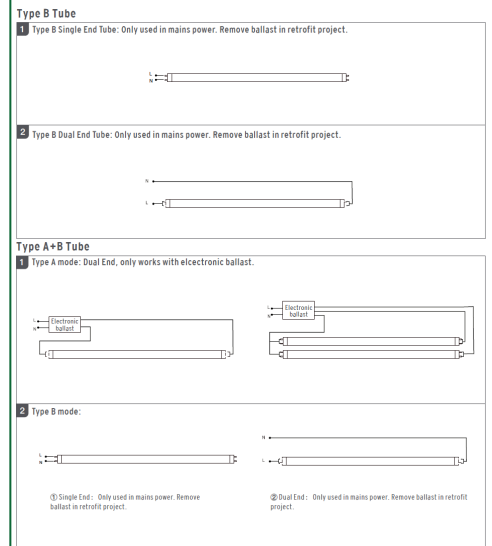

Other Models: T8-EZ6-GS-4FT-18W-C (Clear Model)



Close-up View



Front View



Socket View