





LED LAMPS

ProLED

T8 Linear 8 Foot Double Ended Bypass Series

High performance T8 Linear Bypass Lamps are energy efficient, long lasting replacements for traditional T8 and T12 fluorescent linear lamps

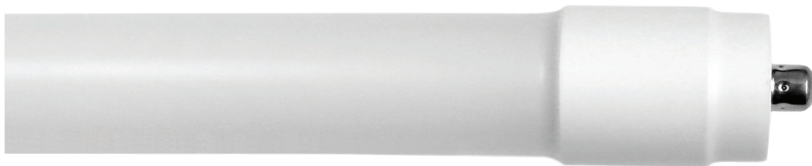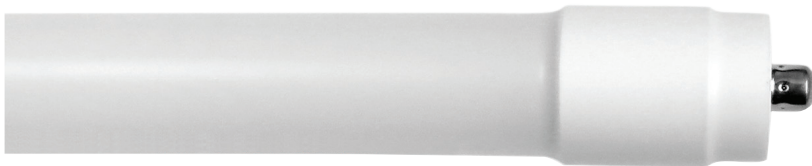


Contact Your Customer Care Specialist
For Pricing, Orders And Technical Support.
800.677.3334 www.halcolighting.com

ProLED®

T8 Linear 8 Foot Double Ended Bypass Series

Product #: _____ Type: _____
 Project: _____ Date: _____
 Comments: _____ Initials: _____

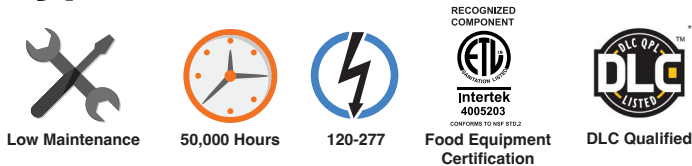


Most reliable and efficient way to retrofit existing Linear Fluorescent T8 and T12 luminaires with simple rewiring

Specifications

- Uses 49% less energy than a standard Fluorescent T8 and lasts up to 66% longer¹
- PET coating helps contain glass in the event of breakage
- Suitable for use in totally enclosed luminaires
- Double-end powered, operates on 120V-277V line voltage range
- 82 CRI for quality and consistent color rendering
- -20°C (-4°F) to 45°C (113°F) operating temperature range
- UL-1598C classified retrofit kit
- UL approved for damp locations


Savings Comparison

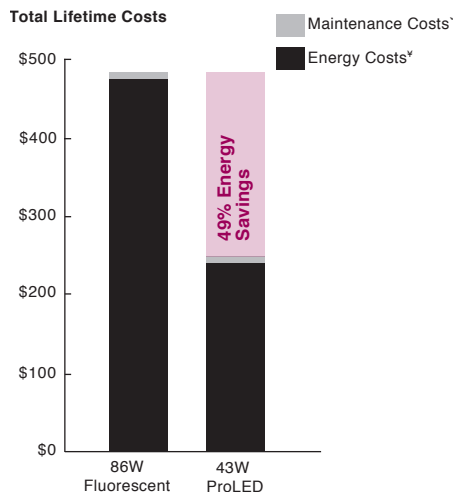

† Maintenance costs based on 15 minutes at \$40 per/hr
 * Energy costs based on \$0.11 kWh



Single Pin

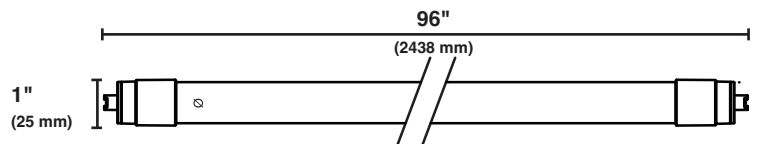

Ordering Information



	Watt	Base	Product #	Product Code	Volts	Color Temp.	CRI	Lumens	Useful Life*	Beam Spread	Pkg. Qty.	MOL	THD	Equivalent Wattage
⊕	42	Single Pin	89004	T896FR42/840/BYP2/SP/LED2PK	120-277	4000K	82	5500	50,000	270°	1/10	96"	<20%	86
⊕	42	Single Pin	89005	T896FR42/850/BYP2/SP/LED2PK	120-277	5000K	82	5500	50,000	270°	1/10	96"	<20%	86
⊕	42	Single Pin	89008	T896FR42/865/BYP/SP/LED2PK	120-277	6500K	82	5500	50,000	270°	1/10	96"	<20%	86

⊕ NEW ITEM
 * Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to burn past this point, but at decreased light levels.
 Warranty – Commercial / Industrial: This product is warranted for 5 years from the date of purchase.
 Must be operated with an ambient fixture temperature between -4°F(-20°C) and 113°F(45°C).
¹ Energy savings based on \$0.11 kWh over 50,000 hour life.
 ** Check the latest update at www.DesignLights.org for listed product catalog numbers. Not all versions are listed.

Warning

Halco ProLED Linear T8 will not operate on a linear fluorescent ballast. Please re-wire the luminaire as shown in the installation instructions included with the product.