




LED LAMPS

ProLED® **T8 Linear Bypass Series**

High performance T8 Linear Bypass Lamps are energy efficient, long lasting replacements for traditional T8 and T12 fluorescent linear lamps

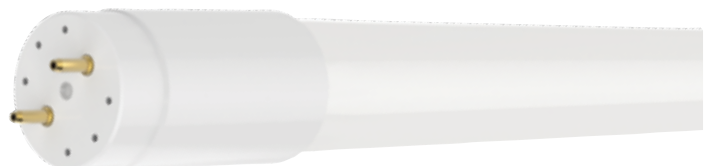

ProLED®

T8 Linear Double Ended Bypass Series

Product #: _____ Type: _____

Project: _____ Date: _____

Comments: _____ Initials: _____



Low Maintenance



50,000 Hours



120-277



Food Equipment
Certification



DLC Qualified




Most reliable and efficient way to retrofit existing Linear Fluorescent T8 and T12 luminaires with simple rewiring


Specifications

- An internal digital protection system ensures safety and convenience during installation and servicing
- Uses 52% less energy than a standard Fluorescent T8 and lasts up to 66% longer¹
- Will work with shunted or non-shunted lampholders
- Suitable for use in totally enclosed luminaires
- Double-end powered, operates on 120V-277V line voltage range
- 82 CRI for quality and consistent color rendering
- -20°C (-4°F) to 45°C (113°F) operating temperature range
- UL 1598C classified retrofit kit
- UL approved for damp locations

Double Ended Bypass

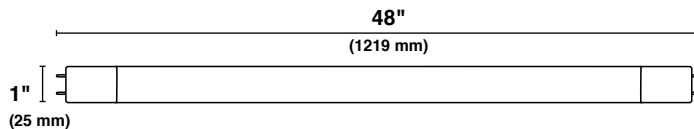

Savings Comparison

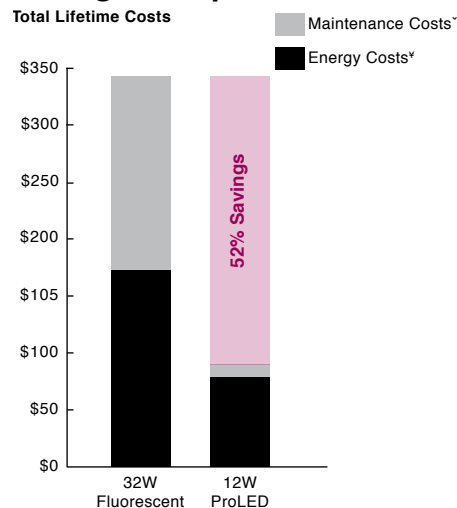

* Maintenance costs based on 15 minutes at \$40 per/hr

† Energy costs based on \$0.11 kWh

Ordering Information



	Watt	Base	Product #	Product Code	Volts	Color Temp.	CRI	Lumens	Useful Life*	Beam Spread	Pkg. Qty.	MOL	THD	DLC® Qualified	Equivalent Wattage
⊕	12	Medium Bi Pin	83886	T8FR12/835/BYP3/DE/LED	120-277	3500	82	1700	50,000	270°	1/25	48"	<20%	Yes	32
⊕	12	Medium Bi Pin	83887	T8FR12/840/BYP3/DE/LED	120-277	4000	82	1800	50,000	270°	1/25	48"	<20%	Yes	32
⊕	12	Medium Bi Pin	83888	T8FR12/850/BYP3/DE/LED	120-277	5000	82	1800	50,000	270°	1/25	48"	<20%	Yes	32

⊕ NEW ITEM

* Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to burn past this point, but at decreased light levels.

Warranty – Commercial / Industrial: This product is warranted for 5 years from the date of purchase.

Must be operated with an ambient fixture temperature between -4°F(-20°C) and 113°F(45°C).

¹ Energy savings based on \$0.11 kWh over 50,000 hour life.

** Check the latest update at www.DesignLights.org for listed product catalog numbers. Not all versions are listed.

Warning

Halco ProLED Linear T8 will not operate on a linear fluorescent ballast. Please re-wire the luminaire as shown in the installation instructions included with the product.

Halco Lighting Technologies 2940 Pacific Drive I Norcross, GA 30071 I Toll Free 800.677.3334 I Phone 770.242.3612 I Fax 800.880.0822 I halcolighting.com Atlanta I Chicago I Cleveland I Houston I Los Angeles I Phoenix

© 2019 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change.

ProLED®

T8 Linear 8 Foot Double Ended Bypass Series




Most reliable and efficient way to retrofit existing Linear Fluorescent T8 and T12 luminaires with simple rewiring

Specifications

- Single pin and recessed double contact option
- Uses 49% less energy than a standard Fluorescent T8 and lasts up to 66% longer¹
- PET coating helps contain glass in the event of breakage
- Suitable for use in totally enclosed luminaires
- Double-end powered, operates on 120V-277V line voltage range
- 82 CRI for quality and consistent color rendering
- -20°C (-4°F) to 45°C (113°F) operating temperature range
- UL-1598C classified retrofit kit
- UL approved for damp locations

Savings Comparison

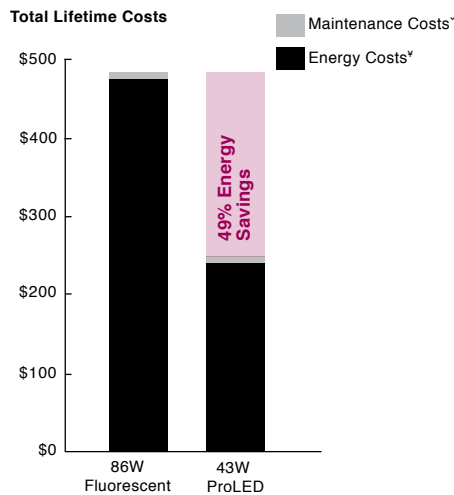

* Maintenance costs based on 15 minutes at \$40 per/hr
 † Energy costs based on \$0.11 kWh

Ordering Information

	Watt	Base	Product #	Product Code	Volts	Color Temp.	CRI	Lumens	Useful Life*	Beam Spread	Pkg. Qty.	MOL	THD	Equivalent Wattage
⊕	42	Single Pin	82875	T896FR42/840/BYP2/SP/LED	120-277	4000	82	5500	50,000	270°	1/10	96"	<20%	86
⊕	42	Single Pin	82876	T896FR42/850/BYP2/SP/LED	120-277	5000	82	5500	50,000	270°	1/10	96"	<20%	86
⊕	42	Recessed Double Contact	82877	T896FR42/840/BYP2/RDC/LED	120-277	4000	82	5500	50,000	270°	1/10	96"	<20%	86
⊕	42	Recessed Double Contact	82878	T896FR42/850/BYP2/RDC/LED	120-277	5000	82	5500	50,000	270°	1/10	96"	<20%	86
⊕	42	Recessed Double Contact	82879	T896FR42/865/BYP2/RDC/LED	120-277	6500	82	5500	50,000	270°	1/10	96"	<20%	86

o NEW ITEM

* Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to burn past this point, but at decreased light levels.

Warranty – Commercial / Industrial: This product is warranted for 5 years from the date of purchase.


Must be operated with an ambient fixture temperature between -4°F (-20°C) and 113°F (45°C).

¹ Energy savings based on \$0.11 kWh over 50,000 hour life.


Warning

Halco ProLED Linear T8 will not operate on a linear fluorescent ballast. Please re-wire the luminaire as shown in the installation instructions included with the product.


Product #: _____ Type: _____
 Project: _____ Date: _____
 Comments: _____ Initials: _____

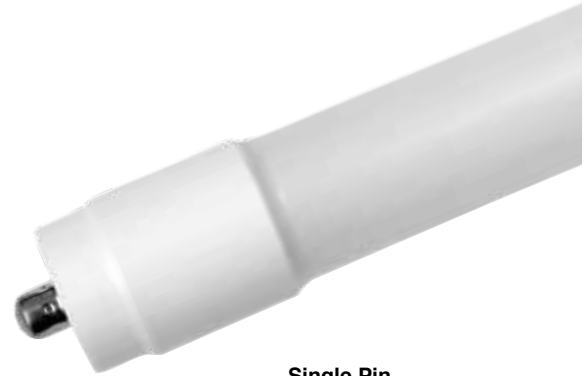

Single Pin

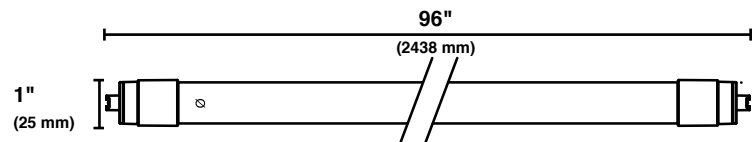

Recessed Double Contact

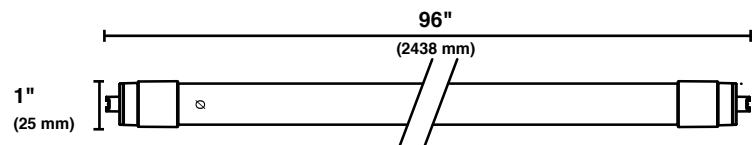

ProLED®

T8 Linear 4 Foot Bypass Series

Product #: _____ Type: _____

Project: _____ Date: _____

Comments: _____ Initials: _____



Low Maintenance



50,000 Hours



120-277




DLC Qualified

Most reliable and efficient way to retrofit existing Linear Fluorescent T8 and T12 luminaires with simple rewiring


Specifications

- Uses 53% less energy than a standard Fluorescent T8 and lasts up to 66% longer¹
- Suitable for use in totally enclosed luminaires
- Single-end powered, operates on 120V-277V line voltage range
- 82 CRI for quality and consistent color rendering
- -20°C (-4°F) to 45°C (113°F) operating temperature range
- UL 1598C classified retrofit kit
- UL approved for damp locations

T8FR15/840/BYP3/LED

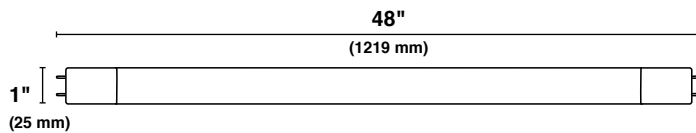

Savings Comparison

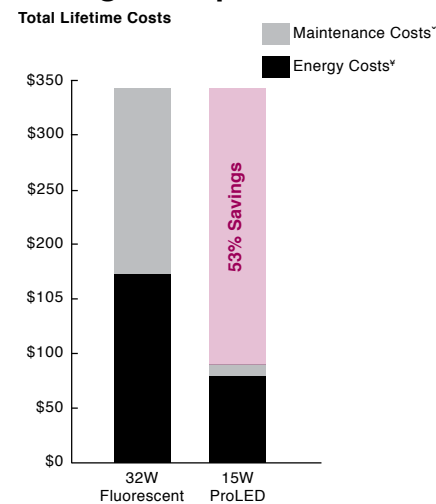

* Maintenance costs based on 15 minutes at \$40 per/hr
 ¥ Energy costs based on \$0.11 kWh

Ordering Information

Watt	Base	Product #	Product Code	Volts	Color Temp.	CRI	Lumens	Useful Life*	Beam Spread	Pkg. Qty.	MOL	THD	DLC® Qualified	Equivalent Wattage
15	Medium Bi Pin	82883	T8FR15/835/BYP3/LED	120-277	3500	82	2000	50,000	270°	1/25	48"	<20%	Yes	32
15	Medium Bi Pin	82884	T8FR15/840/BYP3/LED	120-277	4000	82	2000	50,000	270°	1/25	48"	<20%	Yes	32
15	Medium Bi Pin	82885	T8FR15/850/BYP3/LED	120-277	5000	82	2000	50,000	270°	1/25	48"	<20%	Yes	32

* Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to burn past this point, but at decreased light levels.

Warranty – Commercial / Industrial: This product is warranted for 5 years from the date of purchase.

Must be operated with an ambient fixture temperature between -4°F(-20°C) and 113°F(45°C).

¹ Energy savings based on \$0.11 kWh over 50,000 hour life.

** Check the latest update at www.DesignLights.org for listed product catalog numbers. Not all versions are listed.

Warning

Halco ProLED Linear T8 will not operate on a linear fluorescent ballast or with shunted lampholders. Please re-wire the luminaire as shown in the installation instructions included with the product and ensure non-shunted lampholders are installed in the luminaire before installing this product.

