




T9 Circline Lamp / Adapter Specifications

T9 Circline Compact Fluorescent


- 10,000 Hours average rated lamp life

Ballast/Lamp Item #	Ballast Wattage	Lamp Wattage	Incandescent Watts Comparison	Input Line Current	Initial Lumens	M.O.L. (inches)	Diameter (inches)	Power Factor	THD	Ballast Replacement	Lamp Replacement
17022/20	22	20	75	.40A	1200	3.65	6.0	> .50	< 150%	17022	32020
17022L	22	22	90	.40A	1400	3.65	8.0	> .50	< 150%	17022	32022
17030L	30	30	120	.44A	2000	3.65	9.0	> .50	< 150%	17030	32030
17036/30	36	30	125	.49A	2100	3.65	9.0	> .50	< 150%	17036	32030
12522/20	22	20	75	.20A	1200	3.65	6.0	> .95	< 24%	12522	32020
12522L	22	22	90	.20A	1400	3.65	8.0	> .95	< 24%	12522	32022
12530L	30	30	120	.25A	2000	3.65	9.0	> .95	< 24%	12530	32030
12536/30	36	30	125	.33A	2100	3.65	9.0	> .95	< 24%	12536	32030

For Straight Bracket Add Suffix ST to Item #.

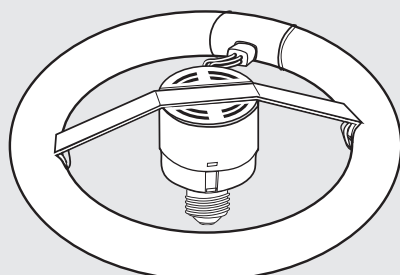

16530L

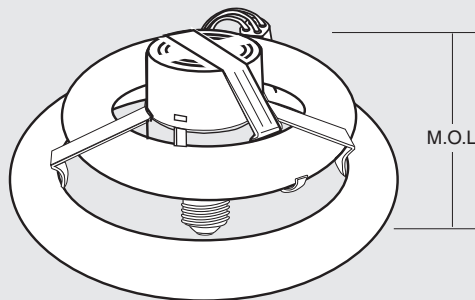

16555L

Applications:

- Use anywhere a standard incandescent is used.
Perfect for: Table Lamps, Floor Lamps, Ceiling Fixtures

Features and Benefits

- Long life, 10,000 hour average rated lamp life
50,000 hour average rated ballast life
- Lasts 7 years, based on 4 hours use per day
- Lasts 10-13 times longer than similar incandescent
- Replace less often, ideal for hard to reach places
- Lower maintenance and labor costs for lamp replacements
- 2850°K color temperature closest to incandescent light
- Quick run-up time
- Instant start, flicker free
- End of Life logic guards against violent failures
- World class phosphor insures high lumen output and excellent lumen maintenance

Specifications (at full brightness)

End of Life Protection-----	Yes
Bracket Type -----	Bent Wing
Ballast Type -----	Electronic
Starting Method -----	Modified Rapid Start
Input Line Voltage -----	120VAC
Input Line Frequency -----	50/60HZ
Lamp Life (rated) -----	10,000 Hours
Ballast Life (rated) -----	50,000 Hours
Color Temperature -----	2850°K
Color Rendering Index -----	82
Min. Starting Temperature -----	-20 ° F
Max. Operating Temperature --	160 ° F
U.L. / C.U.L. Listed -----	Yes
FCC Compliance -----	Part 18, Subpart C
Lamp Operating Frequency ---	45 KHZ
Lamp Current Crest Factor ----	< 1.60
Max. Open Circuit Voltage -----	600V



ISO 9002
CERTIFIED

12 MONTH
WARRANTY

TCP, Inc.

325 Campus Dr. | Aurora, Ohio 4420 | P: 1-800-324-1496 | F: 330-995-6188 | www.tcpi.com

©TCP, Inc. 2007/01866