




2-Piece SpringLamp® Specifications

Two Piece SpringLamp® Compact Fluorescent

- 159 series NPF, 160 series HPF, 2.20 Inches in Diameter

Item #	Wattage	Incandescent Wattage Comparison	Initial Lumens	Color Rendering Index	Input Line Current	Power Factor	Total Harmonic Distortion	Replacement Lamps
15909L	9	35	400	82	.16A	<150%	> .50	35009
15911L	11	40	550	82	.19A	<150%	> .50	35011
15915L	15	60	930	82	.24A	<150%	> .50	35015
15918L	18	60	1150	82	.29A	<150%	> .50	35018
15923L	23	90	1400	82	.35A	<150%	> .50	35023
15926L	26	100	1750	82	.45A	<150%	> .50	35026
15932L	32	120	2100	82	.49A	<150%	> .50	35032
16009L	9	35	400	82	.09A	< 33%	> .90	35009
16011L	11	40	550	82	.11A	< 33%	> .90	35011
16015L	15	60	930	82	.15A	< 33%	> .90	35015
16018L	18	75	1150	82	.18A	< 33%	> .90	35018
16023L	23	90	1400	82	.20A	< 33%	> .90	35023
16026L	26	100	1750	82	.23A	< 33%	> .90	35026

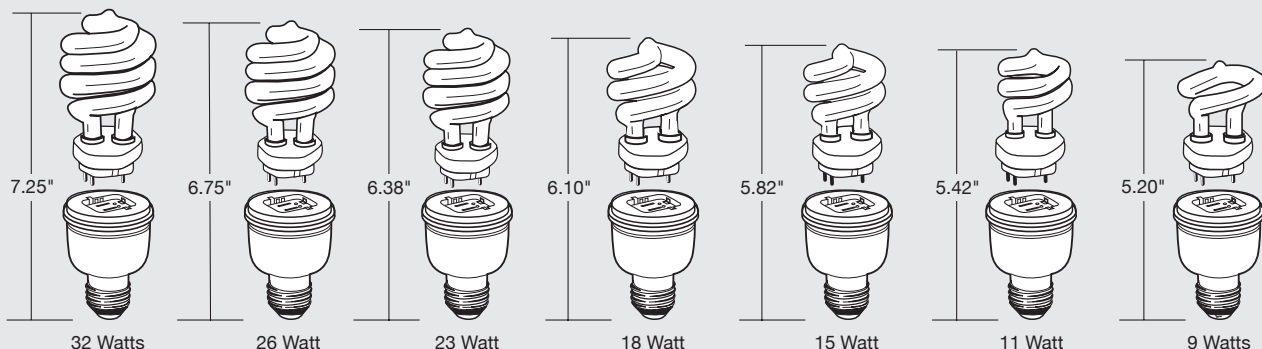

Applications:

Use anywhere a standard incandescent is used.
Perfect for:
Table Lamps, Floor Lamps, Ceiling Fixtures, Closet Lights

Features and Benefits:

- Long life, 10,000 hour average rated life
50,000 hour average rated ballast life
- Lasts 7 years, based on 4 hours use per day
- Lasts 10-13 times longer than similar incandescent
- Replace less often, ideal for hard to reach places
- Lower maintenance and labor costs for lamp replacements
- 2700°K color temperature closest to incandescent light
- Quick run-up time
- Instant start, flicker free
- End of Life logic guards against violent failures
- World class phosphor insures high lumen output and excellent lumen maintenance

Specifications (at full brightness)

End of Life Protection----- Yes
Ballast Type ----- Electronic
Starting Method ----- Modified Rapid Start
Input Line Voltage ----- 120VAC
Input Line Frequency ----- 60HZ
Lamp Life (rated) ----- 10,000 Hours
Ballast Life (rated) ----- 50,000 Hours
Color Temperature ----- 2700°K
Min. Starting Temperature ----- 20 ° F
Max. Operating Temperature -- 160 ° F
U.L. / C.U.L. Listed ----- Yes
FCC Compliance ----- Part 18, Subpart C
Lamp Operating Frequency --- 45 KHZ
Lamp Current Crest Factor ---- < 1.60
Max. Open Circuit Voltage ----- 600V



ISO 9002
CERTIFIED

12 MONTH
WARRANTY

TCP, Inc.

300 Lena Drive | Aurora, Ohio 44202 | P: 800-324-1496 | F: 330-995-6188 | www.tcpi.com

©TCP, Inc. 2006/00562