



Hardwire SpringLamp® Specifications


SpringLamp® Compact Fluorescent Replaceable Ballast

- Energy Efficient Compact Fluorescent
- 50,000 Hours average rated life

Item #	Wattage	Description	Base Type	Input Line Current	Length (inches)	Diameter (inches)	Maximum % THD	Power Factor
15909Q	9	NPF, Replaceable Ballast	TCX	.16A	1.70	2.50	< 150%	> .50
15911Q	11	NPF, Replaceable Ballast	TCX	.19A	1.70	2.50	< 150%	> .50
15915Q	15	NPF, Replaceable Ballast	TCX	.24A	1.70	2.50	< 150%	> .50
15918Q	18	NPF, Replaceable Ballast	TCX	.29A	1.70	2.50	< 150%	> .50
15923Q	23	NPF, Replaceable Ballast	TCX	.35A	1.70	2.50	< 150%	> .50
15926Q	26	NPF, Replaceable Ballast	TCX	.45A	1.70	2.50	< 150%	> .50
15932Q	32	NPF, Replaceable Ballast	TCX	.49A	1.70	2.50	< 150%	> .50

Specifications (at full brightness)

Ballast Type ----- Electronic, Replaceable
Starting Method ----- Modified Rapid Start
Input Line Voltage ----- 120VAC
Input Line Frequency ----- 50/60HZ
Ballast Life (rated) ----- 50,000 Hours
Minimum Starting Temperature ----- -20 ° F
Maximum Operating Temperature ----- 160 ° F
U.L. / C.U.L. Listed ----- Yes
FCC Compliance ----- Part 18, Subpart C
Lamp Operating Frequency ----- 45 KHZ
Lamp Current Crest Factor ----- < 1.60
Maximum Open Circuit Voltage ----- 600V
End of Life Protection----- Yes

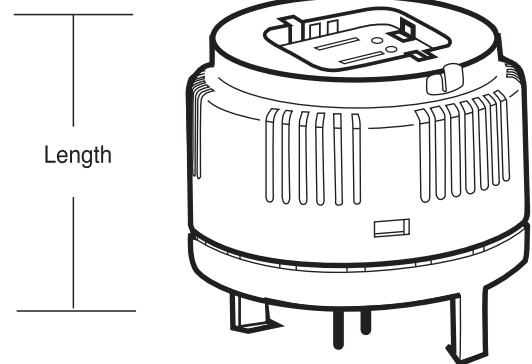

Replaceable
TCX
Ballast



ISO 9002
CERTIFIED

2 YEAR
WARRANTY

Technical Consumer Products, Inc

300 Lena Drive | Aurora, Ohio 44202 | P: 800-324-1496 | F: 330-995-6188 | www.tcpi.com

©TCP, Inc. 03/06 00355 SS