



Hardwire SpringLamp® Specifications


SpringLamp® CFL Replaceable Ballast with Table Lamp Base and Lamp

- Energy Efficient Compact Fluorescent
- 50,000 Hours average rated life ballast • 10,000 Hours average rated life lamp

Item #	Wattage	Incandescent Wattage Comparison	Description	Lumens	Input Line Current	Length (inches)	Diameter (inches)	Maximum % THD	Power Factor
15909TL	9	35	NPF, Ballast, Lamp, TL Base	400	.16A	4.65	2.50	< 150%	> .50
15911TL	11	40	NPF, Ballast, Lamp, TL Base	550	.19A	4.90	2.50	< 150%	> .50
15915TL	15	60	NPF, Ballast, Lamp, TL Base	930	.24A	5.20	2.50	< 150%	> .50
15918TL	18	75	NPF, Ballast, Lamp, TL Base	1150	.29A	5.50	2.50	< 150%	> .50
15923TL	23	90	NPF, Ballast, Lamp, TL Base	1400	.35A	5.75	2.50	< 150%	> .50
15926TL	26	100	NPF, Ballast, Lamp, TL Base	1750	.45A	6.40	2.50	< 150%	> .50
15932TL	32	130	NPF, Ballast, Lamp, TL Base	2100	.49A	6.85	2.50	< 150%	> .50

Specifications (at full brightness)

Ballast Type -----	Electronic, Replaceable
Starting Method -----	Modified Rapid Start
Input Line Voltage -----	120VAC
Input Line Frequency -----	50/60HZ
Ballast Life (rated) -----	50,000 Hours
Lamp Life (rated) -----	10,000 Hours
Color Temperature (Kelvin) -----	2850
Color Rendering Index -----	82
Minimum Starting Temperature -----	-20 ° F
Maximum Operating Temperature -----	160 ° F
U.L. / C.U.L. Listed -----	Yes
FCC Compliance -----	Part 18, Subpart C
Lamp Operating Frequency -----	45 KHZ
Lamp Current Crest Factor -----	< 1.60
Maximum Open Circuit Voltage -----	600V
End of Life Protection-----	Yes

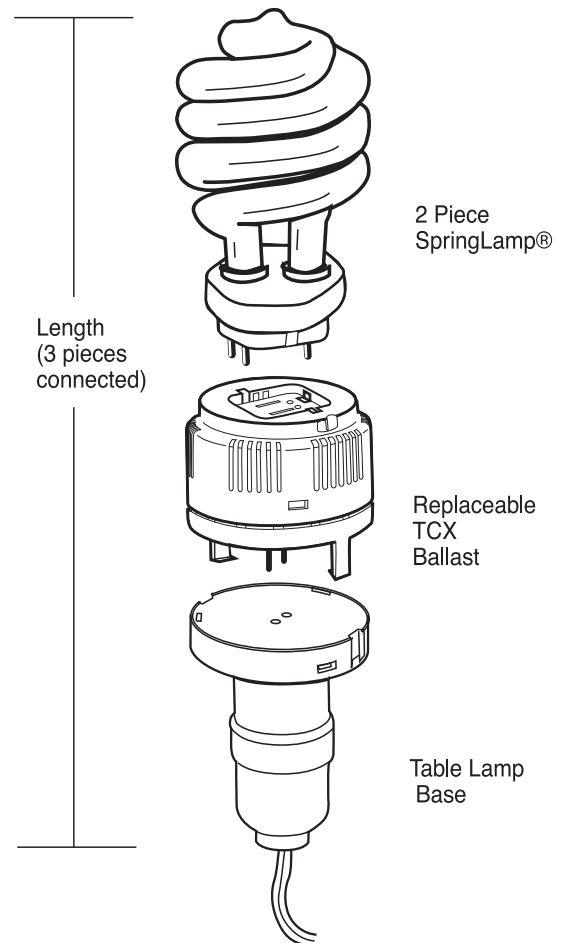

ISO 9002
CERTIFIED

LAMP
1 YEAR
WARRANTY

BALLAST
2 YEAR
WARRANTY

Technical Consumer Products, Inc

300 Lena Drive | Aurora, Ohio 44202 | P: 800-324-1496 | F: 330-995-6188 | www.tcpi.com

©TCP, Inc. 03/06 00357 SS