



161 Series Lamp Specifications

2 Piece Dimmable SpringLamp®, Compact Fluorescent

- HPF, Dimming Range: 100-20%

Item #	Wattage	Incandescent Wattage Comparison	Initial Lumens	Input Line Current	M.O.L. (inches)	Diameter (inches)	Life vs. Incandescent	Replacement Lamp
16109L	9	35	400	.09A	5.2	2.2	5X	36009
16111L	11	40	550	.11A	5.4	2.2	5X	36011
16115L	15	60	930	.15A	5.8	2.2	5X	36015
16120L	20	75	1200	.18A	6.1	2.2	5X	36020

Applications

- Use anywhere a standard incandescent is used.
Table Lamps, Floor Lamps, Ceiling Fixtures

Special Application Options: (Ordering Suffix)


- 3100°K (31K), 3500°K (35K), 4100°K (41K),
5100°K (51K), 6500°K (65K)

Features and Benefits

- Long life CFL, 10,000 hour average rated life
- NEW Amalgam technology- provides cooler operating temperatures for consistent performance in any position
- No lead glass – Better lumen maintenance over life of bulb
- 2700°K color temperature closest to incandescent light
- Medium base
- Replace less often, ideal for hard to reach places
- U.L. Listed for wet locations – use indoors or outdoors
- 15 Month Warranty
- Quickstart technology – fast run up time

Specifications (at full brightness)

End of Life Protection-----	Yes
Ballast Type -----	Electronic
Starting Method -----	Modified Rapid Start
Input Line Voltage -----	120VAC
Input Line Frequency -----	50/60HZ
Lamp Life (rated) -----	10,000 Hours
Ballast Life (rated) -----	50,000 Hours
Color Temperature -----	2700°K
Color Rendering Index -----	82
Min. Starting Temperature -----	-20 ° F
Max. Operating Temperature -----	160 ° F
U.L. / C.U.L. Listed -----	Yes
FCC Compliance -----	Part 18, Subpart C
Lamp Operating Frequency -----	45 KHZ
Lamp Current Crest Factor -----	< 1.60
Max. Open Circuit Voltage -----	600V
Power Factor -----	> .90
Total Harmonic Distortion -----	< 33%

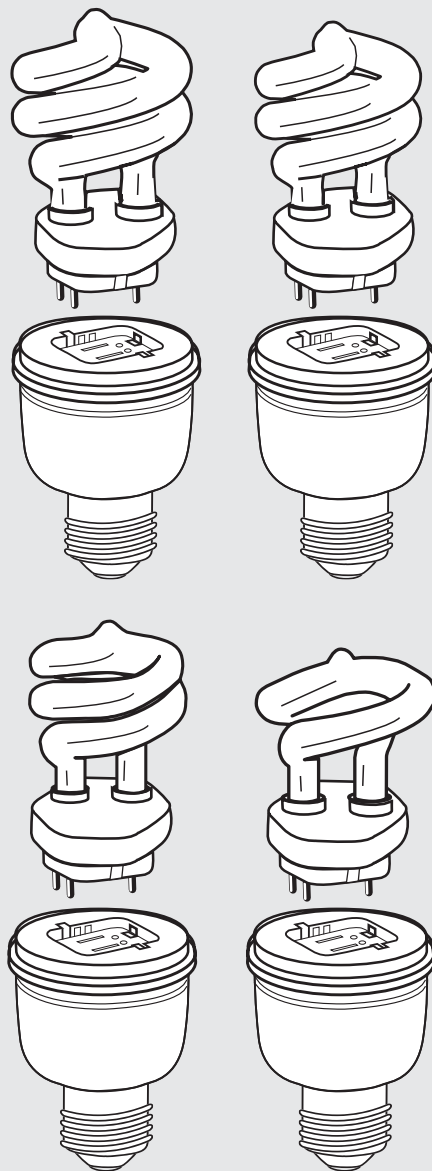

ISO 9002
CERTIFIED

15 MONTH
WARRANTY

TCP, Inc.

325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | F: 330-995-6188 | www.tcpi.com

©TCP, Inc. 2008/02471