



Hardwire Circline Specifications


Circline Compact Fluorescent Replaceable Ballast with Hardwire Base

- Energy Efficient Compact Fluorescent
- 50,000 Hours average rated life

Item #	Wattage	Description	Input Line Current	Length (inches)	Diameter (inches)	Maximum % THD	Power Factor
12522HW	22	HPF, Replaceable Ballast	.20A	1.95	2.50	< 24%	> .95
12530HW	30	HPF, Replaceable Ballast	.25A	1.95	2.50	< 24%	> .95
12536HW	36	HPF, Replaceable Ballast	.32A	1.95	2.50	< 24%	> .95
17022HW	22	NPF, Replaceable Ballast	.40A	1.95	2.50	< 150%	> .50
17030HW	30	NPF, Replaceable Ballast	.44A	1.95	2.50	< 150%	> .50
17036HW	36	NPF, Replaceable Ballast	.49A	1.95	2.50	< 150%	> .50
17040HW	40	NPF, Replaceable Ballast	.66A	1.95	2.50	< 150%	> .50
17058HW	58	NPF, Replaceable Ballast	.80A	1.95	2.50	< 150%	> .50
16530HW	30	NPF, Replaceable Ballast	.28A	2.60	2.50	< 150%	> .50
16555HW	55	NPF, Replaceable Ballast	.86A	2.60	2.50	< 150%	> .50
16565HW	65	NPF, Replaceable Ballast	.92A	2.60	2.75	< 150%	> .50

Specifications (at full brightness)

Ballast Type ----- Electronic, Replaceable
Starting Method ----- Modified Rapid Start
Input Line Voltage ----- 120VAC
Input Line Frequency ----- 50/60HZ
Ballast Life (rated) ----- 50,000 Hours
Minimum Starting Temperature ----- -20 ° F
Maximum Operating Temperature ----- 160 ° F
U.L. / C.U.L. Listed ----- Yes
FCC Compliance ----- Part 18, Subpart C
Lamp Operating Frequency ----- 45 KHZ
Lamp Current Crest Factor ----- < 1.60
Maximum Open Circuit Voltage ----- 600V
End of Life Protection----- Yes

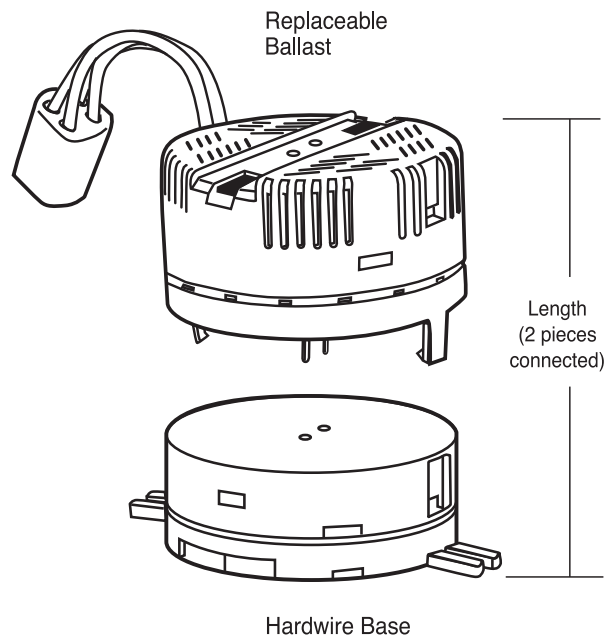

ISO 9002
CERTIFIED

2 YEAR
WARRANTY

Technical Consumer Products, Inc

300 Lena Drive | Aurora, Ohio 44202 | P: 800-324-1496 | F: 330-995-6188 | www.tcp.com

©TCP, Inc. 03/06 00342 SS