




T2 G10 / G20 Globe Lamp Specifications

T2 SpringLamp® Compact Fluorescent, NPF

- An Energy Saving Solution for hard to reach light fixtures

Item #	Wattage	Incandescent Wattage Comparison	Initial Lumens	Input Line Current	M.O.L. (inches)	Diameter (inches)	Life vs. Incandescent	Base Type
1G1002	2	10	80	.03A	3.0	1.5	5X	Medium
1G1002C	2	10	80	.03A	3.0	1.5	5X	Candelabra
1G2002	2	15	170	.03A	3.4	2.5	5X	Medium
1G2002C	2	15	170	.03A	3.2	2.5	5X	Candelabra
1G2004	4	25	200	.07A	3.4	2.5	5X	Medium
1G2004C	4	25	200	.07A	3.2	2.5	5X	Candelabra

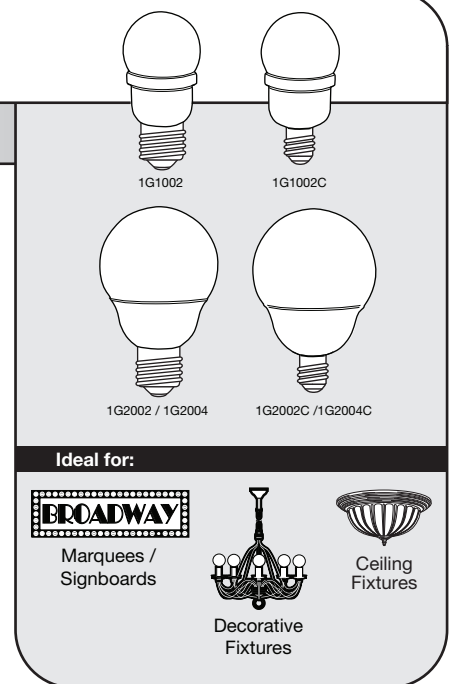

Specifications (at full brightness)

End of Life Protection	Yes
Ballast Type	Electronic
Starting Method	Modified Rapid Start
Input Line Voltage	120VAC
Input Line Frequency	50/60HZ
Lamp Life (rated)	8,000 Hours
Color Temperature	2700°K
Color Rendering Index	82
Minimum Starting Temperature	-20 ° F
Maximum Operating Temperature	160 ° F
U.L. / C.U.L. Listed	Yes
FCC Compliance	Part 18, Subpart C
Lamp Operating Frequency	45 KHZ
Lamp Current Crest Factor	< 1.60
Maximum Open Circuit Voltage	600V
Power Factor	> .50
Total Harmonic Distortion	< 150%

Features and Benefits:

- Long life CFL, 8,000 hours average rated life
- NEW Amalgam technology - provides cooler operating temperatures for consistent performance in any position
- No lead glass- Better lumen maintenance over life of bulb
- 2700°K color temperature closest to incandescent light
- Medium and Candelabra base
- Replace less often, ideal for hard to reach places
- U.L. Listed for wet locations - use indoors or outdoors
- 12 Month Warranty
- Quickstart technology - fast run up time

Special Application Options: (Ordering Suffix)

- 3100°K (31K), 3500°K (35K), 4100°K (41K), 5100°K (51K)
- Long Neck 1.65" (165), 1.75" (175), 2.25" (225)
- Shatter Resistant (SS) R20 only
- Pink (P), Soft Pink (SP)



12 MONTH
WARRANTY