




SB Series Specifications


One Piece Compact Fluorescent Silver Bowl

- NPF, 8,000 Hours average rated life


Item #	Wattage	Incandescent Wattage Comparison	Initial Lumens	Input Line Current	M.O.L. (Inches)	Diameter (Inches)	Base
11314SB	14	25	340	.23A	4.0	2.4	Medium
1G2509SB	9	25	320	.15A	4.3	3.1	Medium
1G3014SB	14	40	400	.23A	5.0	3.7	Medium




SpringLamp Inside!

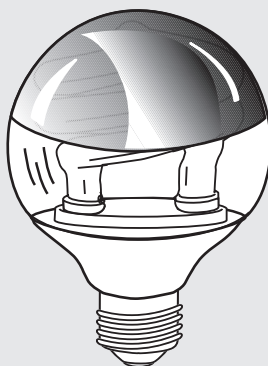

1G3014SB



1G2509SB



11314SB

M.O.L.

Applications:

Perfect for: Ceiling fixtures for overhead indirect lighting



Features and Benefits

- Long life, 8,000 hour average rated life
- Lasts 5 times longer than similar incandescent
- Replace less often, ideal for hard to reach places
- Lower maintenance and labor costs for lamp replacements
- Quick run-up time
- Medium base and compact height fits anywhere a standard incandescent fits
- Instant start, flicker free
- End of Life logic guards against violent failures
- World class phosphor insures high lumen output and excellent lumen maintenance

Specifications

End of Life Protection-----	Yes
Ballast Type -----	Electronic
Starting Method -----	Modified Rapid Start
Input Line Voltage -----	120VAC
Input Line Frequency -----	60HZ
Lamp Life (rated) -----	8,000 Hours
Color Temperature -----	2700°K
Color Rendering Index -----	84
Min. Starting Temperature -----	-20 ° F
Max. Operating Temperature --	160 ° F
U.L. / C.U.L. Listed -----	Yes
FCC Compliance -----	Part 18, Subpart C
Lamp Operating Frequency ---	45 KHZ
Lamp Current Crest Factor ----	< 1.60
Max. Open Circuit Voltage ----	600V
Power Factor -----	> .50
Total Harmonic Distortion -----	< 150%



ISO 9002
CERTIFIED

12 MONTH
WARRANTY

TCP, Inc.

300 Lena Drive | Aurora, Ohio 44202 | P: 800-324-1496 | F: 330-995-6188 | www.tcpi.com

©TCP, Inc. 2006/00559