



Remote Capable Exit Specification

LED Exit Signs

120 or 277 Voltage, Damp Location

Features and Benefits:

- Completely self-contained
- Fully automatic operation
- Compact, low-profile design in neutral finish
- Push-to-test switch
- Automatic, low-voltage disconnect (LVD)
- 120 or 277 VAC operation
- Injection-molded, V-0 flame retardant, high-impact thermoplastic housing
- Charge rate/power on LED indicator light
- Energy consumption of 3.2 watts for red letters and 3.8 watts for green letters
- LED lamp life of 25 years plus
- Listed for damp location
- Universal mounting canopy for side or top installation
- Universal K/O chevrons
- Larger battery for remote capability
- Can run up to 14.4W of remote heads for a minimum of 90 minutes
- Maintenance-free battery provides an estimated service life of 10 years with an operating temperature of 20°C (68°F) to 40°C (104°F)
- UL 924 listed
- Meets NFPA Life Safety Code 101


Catalog Number

Notes

Type



Dimensions:

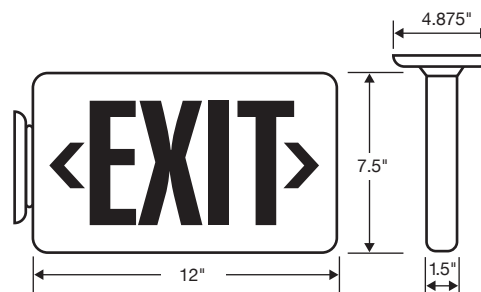

Warranties & Compliances:

Item #

Description

LED Color

Housing Color



Sealed Lead Acid Battery

1 YEAR WARRANTY

Unit

5 YEAR WARRANTY

LED Strip

25 YEAR WARRANTY

Ordering Information:

20743DRM

Red Battery Back Up Remote Capacity Exit

Red

White

20745DRM

Green Battery Back Up Remote Capacity Exit

Green

White

Accessories:

207WG

Wire Guard for Exit Sign

207WGW

WH Wire Guard for Exit Sign

207PS

Polycarbonate Shield for Exit Sign

20734

Replacement battery Lead Acid 6V 4.5Ah

207R1

Single WH Remote Head 6W 6V

207R2

Double WH Remote Head 2 X 6W 6V

207R3

Single Gray Remote Waterproof Head 5.4W 6V

207R4

Double Gray Remote Waterproof Head 2 X 5.4W 6V

207R5

Single Square Remote Head 12W 12V

TCP, Inc.

325 Campus Dr. | Aurora, Ohio 44202 | P: 1-800-324-1496 | F: 330-995-6188 | tcp.com

©TCP, Inc. JAN 2010/41837

TCP is proud to have been awarded
ENERGY STAR® Partner of the Year 2009.



ENERGY STAR
AWARD
2009

PARTNER OF THE YEAR