



Steel LED Exit Sign Specification

LED Exit Signs

120 or 277 Voltage, Damp Location

Features and Benefits:

- 120/277 VAC operation
- Energy efficient LEDs draw a maximum of 1.7W in standard mode
- Ceiling, end, or back mounting
- Canopy included
- Directional chevron snapouts
- 20 gauge steel housing
- White powder coat finish
- Integrated solid state system
- Constant current, controlled automatic charger circuit
- Low voltage battery cutoff
- Brownout sensitivity
- 3+ hours illumination in emergency mode
- LEDs offer 25+ Year expected life
- Test switch
- LED power-on indicator
- UL 924 Listed


Catalog Number

Notes

Type



Dimensions:

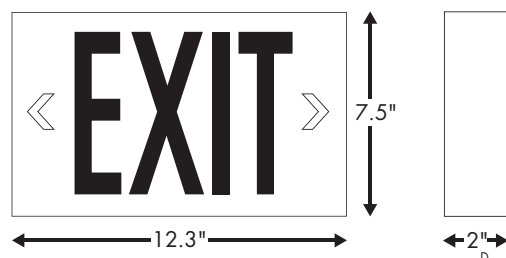

Warranties & Compliances:	Item #	Description	Letter Color	Voltage Input	Lamp Type	Emergency Operation (minutes)
   Ni-Cd battery 5 YEAR WARRANTY Electronics 5 YEAR WARRANTY LED Strip 25 YEAR WARRANTY	Ordering Information:					
	27L98	Steel Red Universal Battery Backup Exit Sign	Red	120/277	LED	90
	27L99	Steel Green Universal Battery Backup Exit Sign	Green	120/277	LED	90
	27D98	Steel Red Universal AC Only Exit Sign	Red	120/277	LED	AC Only
	27D99	Steel Green Universal AC Only Exit Sign	Green	120/277	LED	AC Only
Accessories:						
	207WG	Wire Guard for Exit Sign				
	207GWGH	White Wire Guard for Exit Sign				
	207PS	Polycarbonate Shield for Exit Sign				
	20729	Ni Cd Battery 4.8V 400mAh				