



PL Lamp Specifications

Compact Fluorescent PL Lamp


10,000 Hours average rated life

Applications:

Perfect for most commercial applications: Use where a standard incandescent is used.

- + Table Lamps
- + Recessed Downlighting
- + Outdoor Fixtures
- + Wall Sconces
- + Ceiling Fixtures
- + Ceiling Fans

NOT compatible with dimming applications

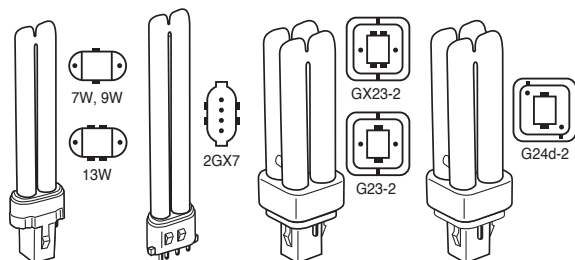


G23 base
Twin Tube


2GX7 base
Twin Tube

G23-2 base
Quad Tube


G24d base
Quad Tube

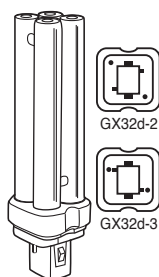

GX32d base
Quad Tube

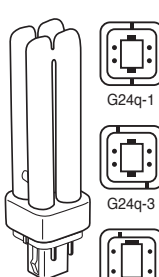

G24q base
Quad Tube

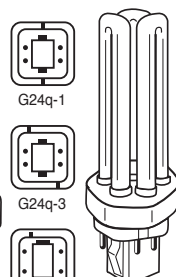

G24q-2 (DBX4P)
GX24q base
Triple Tube




GX24q-4

Catalog Number

Notes

Type

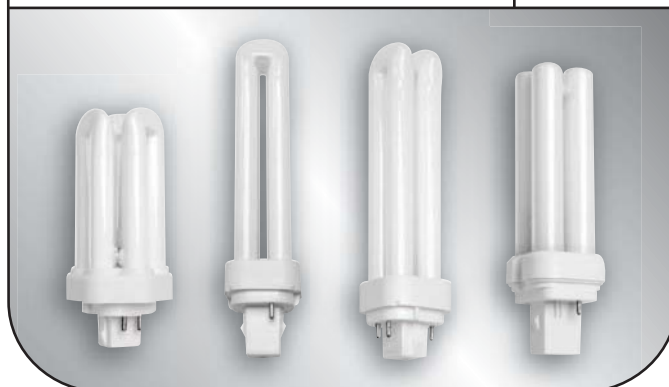

Special Application Options: (Ordering Suffix)

- 2700°K (27K), 3000°K (30K), 3500°K (35K), 4100°K (41K), 5000°K (50K), 6500°K (65K)

Features and Benefits

- Long Life, 10,000 hour average rated life
- Lower maintenance and labor costs for lamp replacements
- Lasts 7 years, based on 3 hours use a day
- Bulb lasts 10-13 times longer than similar incandescent bulbs

Specifications (at full brightness)

Color Temperature 2700° K
Color Rendering Index 82

Warranties and Certifications:	Item #	Incandescent Wattage Comparison	Description	Base Type	Initial Lumens	M.O.L. (inches)	Diameter (inches)
 12 MONTH WARRANTY	32005	5	Twin Tube, 2-pin	G23	250	4.10	1.05
	32007	7	Twin Tube, 2-pin	G23	410	5.25	1.25
	32009	9	Twin Tube, 2-pin	G23	590	6.44	1.25
	32013	13	Twin Tube, 2-pin	GX23	800	6.88	1.25
	32013IST	13	Twin Tube, 2-pin, Instant start*	GX23	800	6.88	1.25
	32413/26x7	13	Twin Tube, 4-pin	2Gx7	800	7.13	1.25
	32009Q	9	Quad Tube, 2-pin	G23-2	590	4.27	1.05
	32013Q	13	Quad Tube, 2-pin	GX23-2	810	5.15	1.35
	32013ISQ	13	Quad Tube, 2-pin, Instant start*	GX23-2	810	4.62	1.35
	32018Q	18	Quad Tube, 2-pin	G24d-2	1150	6.00	1.05
	32022Q	22	Quad Tube, 2-pin	GX32d-2	1350	5.80	1.73
	32026Q	26	Quad Tube, 2-pin	G24d-3	1700	6.63	1.35
	32028Q	28	Quad Tube, 2-pin	GX32d-3	1800	6.46	1.73
	32413Q	13	Quad Tube, 4-pin	G24q-1	875	5.15	1.35
	32418Q	18	Quad Tube, 4-pin	G24q-2	1150	6.63	1.35
	32426Q	26	Quad Tube, 4-pin	G24q-3	1700	6.31	1.05
	32418T	18	Triple Tube, 4-pin	GX24q-2	1150	4.25	1.40
	32426T	26	Triple Tube, 4-pin	GX24q-3	1700	4.78	1.55
	32432T	32	Triple Tube, 4-pin	GX24q-3	2000	5.50	1.60
	32442T	42	Triple Tube, 4-pin	GX24q-4	2600	6.00	1.60

