




Track Lighting Fixture Kit Specification

2-Piece SpringLamp®

- Compact Fluorescent, 10,000 Hours Lamp Life

Item #	Total kit Watts	Incandescent Wattage Comparison	Description	Total Initial Lumens	Input Line Current	Power Factor	Replacement Lamps
59118WH	36	150	White kit, 2 Halo heads	1720	.29A	> .50	35018
59118BK	36	150	Black kit, 2 Halo heads	1720	.29A	> .50	35018
59123WH	46	200	White kit, 2 Halo heads	2100	.35A	> .50	35023
59123BK	46	200	Black kit, 2 Halo heads	2100	.35A	> .50	35023

Halo, Juno and Lightolier Heads are available individually.

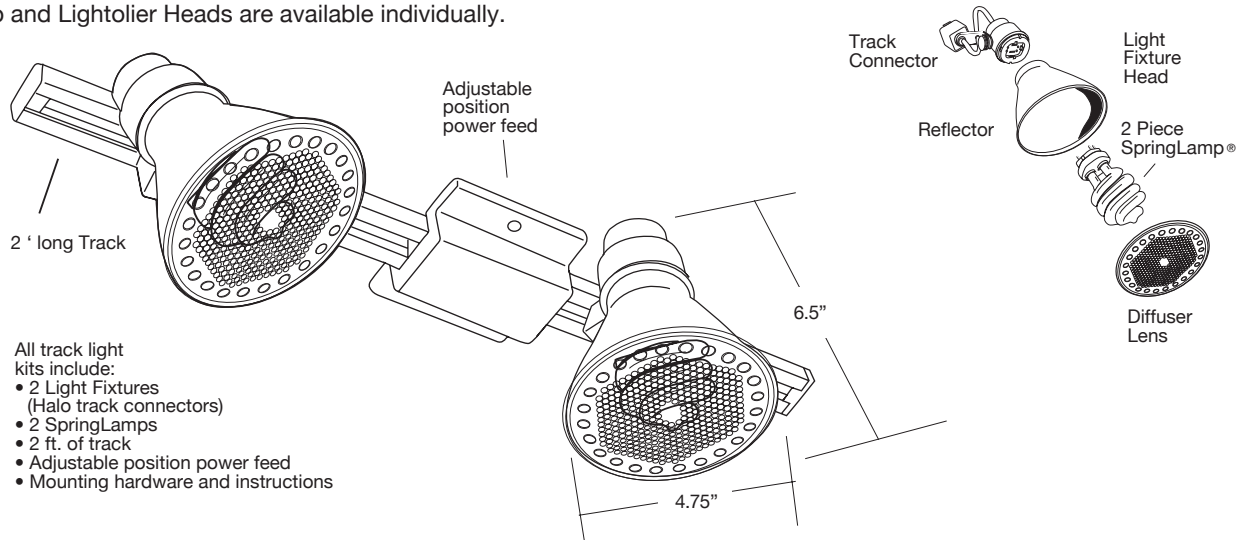

Specifications (at full brightness)

End of Life Protection-----	Yes
Ballast Type -----	Electronic
Starting Method -----	Modified Rapid Start
Input Line Voltage -----	120VAC
Input Line Frequency -----	50/60HZ
Lamp Life (rated) -----	10,000 Hours
Ballast Life (rated) -----	50,000 Hours
Color Temperature -----	2700°K
Color Rendering Index -----	84
Minimum Starting Temperature -----	-20 ° F
Maximum Operating Temperature -----	160 ° F
FCC Compliance -----	Part 18, Subpart C
Lamp Operating Frequency -----	45 KHZ
Lamp Current Crest Factor -----	< 1.60
Maximum Open Circuit Voltage -----	600V

Applications:

- Use anywhere for adjustable, directional lighting
- Perfect for: kitchens, bathrooms, living rooms, rec. rooms

Features and Benefits

- Long life, 10,000 hour average rated lamp life
- 50,000 hour average rated ballast life
- Lasts 7 years, based on 4 hours use per day
- Lasts 10-13 times longer than similar incandescent
- Replace less often, ideal for hard to reach places
- Lower maintenance and labor costs for lamp replacements
- 2700°K color temperature closest to incandescent light
- Quick run-up time
- Instant start, flicker free
- End of life logic guards against violent failures
- World class phosphor insures high lumen output and excellent lumen maintenance

ISO 9002
CERTIFIED

2 YEAR
WARRANTY

TCP, Inc.

325 Campus Drive | Aurora, Ohio 44202 | P: 800-324-1496 | F: 330-995-6188 | www.tcpi.com

©TCP, Inc. 2008/02476