# Elite Designer PAR Series Black Housings

TCP's Elite Designer PAR series provide designer grade light quality with the same look as halogen replacement.

## Limitless options for the following applications:

- Track Lights
- Recessed Downlights
- Display Lights
- Outdoor Fixtures that Protect Lamps from the Elements

## Great features and benefits:

- Energy Efficient: Up to 85% less energy than halogen replacements.
- Smooth, uniform dimming; also available as non-dimming.
- Long Life: 25,000 hours
- 120W, 90W, 75W, 60W and 50W replacements.
- Smooth black outer housing.
- Excellent color consistency and high color rendering (CRI).
- Available in 2400K, 2700K, 3000K, 3500K and 4100K.

PAR38 PAR30LN PAR30SN PAR20

ENERGY STAR PARTNER

# TCP ELITE Designer Series — LED PAR Lamps - Black Housing

| LED | 25,000 Hours average rated life, 120 Volts |
|---|---|

Catalog Number

Notes | Type

## Applications

Ideal for PAR38, PAR30, and PAR20 flood and spot light applications.

- Track Lights
- Recessed Downlights
- Display Lights
- Outdoor Fixtures that Protect Lamps from the Elements

| Features | Benefits |
|---|---|
| Up to 85% less energy than halogen alternatives | Instant energy savings |
| Long life | Minimizes replacement and maintenance costs |
| Unique full face optic | Provides designer grade light quality with same look as halogen replacement. |
| Smooth, clean outside housing | Seemlessly blends into lighting applications |
| Very low heat generation | Perfect for sensistive display lighting such as art galleries. |
| Excellent Color Consistency and CRI | Enhances colors of focal point while maintaining uniformity throughout lighting installation from lamp to lamp. |
| Low weight | Track or down light installations are not strained by excess weight. |
| UL approved for damp location | Can be used outdoors when protected from elements. Withstands humidity indoors/outdoors. |
| Shatter resistant | Lower the risk of injury and breakage |

## Specifications

| | PAR38 | PAR30LN | PAR30SN | PAR20 |
|---|---|---|---|---|
| Input Line Voltage: | 120 VAC | 120 VAC | 120 VAC | 120 VAC |
| Input Power | 17 & 14 W | 14 & 12 W | 12 & 10 W | 10 & 8 W |
| Input Line Frequency | 50/60HZ | 50/60HZ | 50/60HZ | 50/60HZ |
| Lamp Life (Rated) | 25,000 hrs | 25,000 hrs | 25,000 hrs | 25,000 hrs |
| Minimum Starting Temp | -30ºC | -30ºC | -30ºC | -30ºC |
| Maximum Operating Temp | 40ºC | 40ºC | 40ºC | 40ºC |

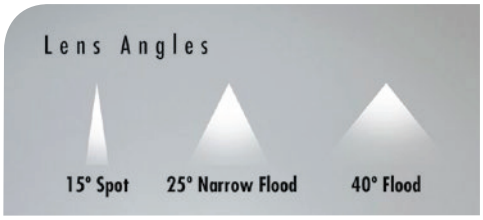

PAR38 PAR30LN PAR30SN PAR20

c UL us 5 YEAR WARRANTY* For the most up-to-date specs, please visit www.tcpi.com

ENERGY STAR PARTNER

Smooth Uniform Dimming

| Item # | Description | Voltage | Wattage | Incandescent Wattage Comparison | Lumens | LPW | CBCP | Beam Angle | CCT | CRI | M.O.L. (inches) | Diameter (inches) | Case Quantity | STK/MTO |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **PAR38** | | | | | | | | | | | | | | |
| LED17P38D24KFLB | Dimmable 17W Smooth PAR38 - 2400K 40°, Black | 120 | 17 | 120 | 1200 | 70.6 | 2024 | 40 | 2400K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED17P38D24KNFLB | Dimmable 17W Smooth PAR38 - 2400K 25°, Black | 120 | 17 | 120 | 1200 | 70.6 | 5520 | 25 | 2400K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED17P38D24KSPB | Dimmable 17W Smooth PAR38 - 2400K 15°, Black | 120 | 17 | 120 | 1200 | 70.6 | 8832 | 15 | 2400K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED17P38D27KFLB | Dimmable 17W Smooth PAR38 - 2700K 40°, Black | 120 | 17 | 120 | 1200 | 70.6 | 2024 | 40 | 2700K | 82 | 5.3 | 4.8 | 12 | STK |
| LED17P38D27KNFLB | Dimmable 17W Smooth PAR38 - 2700K 25°, Black | 120 | 17 | 120 | 1200 | 70.6 | 5520 | 25 | 2700K | 82 | 5.3 | 4.8 | 12 | STK |
| LED17P38D27KSPB | Dimmable 17W Smooth PAR38 - 2700K 15°, Black | 120 | 17 | 120 | 1200 | 70.6 | 8832 | 15 | 2700K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED17P38D30KFLB | Dimmable 17W Smooth PAR38 - 3000K 40°, Black | 120 | 17 | 120 | 1250 | 73.5 | 2200 | 40 | 3000K | 82 | 5.3 | 4.8 | 12 | STK |
| LED17P38D30KNFLB | Dimmable 17W Smooth PAR38 - 3000K 25°, Black | 120 | 17 | 120 | 1250 | 73.5 | 6000 | 25 | 3000K | 82 | 5.3 | 4.8 | 12 | STK |
| LED17P38D30KSPB | Dimmable 17W Smooth PAR38 - 3000K 15°, Black | 120 | 17 | 120 | 1250 | 73.5 | 9600 | 15 | 3000K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED17P38D35KFLB | Dimmable 17W Smooth PAR38 - 3500K 40°, Black | 120 | 17 | 120 | 1275 | 75.0 | 2266 | 40 | 3500K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED17P38D35KNFLB | Dimmable 17W Smooth PAR38 - 3500K 25°, Black | 120 | 17 | 120 | 1275 | 75.0 | 6180 | 25 | 3500K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED17P38D35KSPB | Dimmable 17W Smooth PAR38 - 3500K 15°, Black | 120 | 17 | 120 | 1275 | 75.0 | 9888 | 15 | 3500K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED17P38D41KFLB | Dimmable 17W Smooth PAR38 - 4100K 40°, Black | 120 | 17 | 120 | 1400 | 76.5 | 2332 | 40 | 4100K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED17P38D41KNFLB | Dimmable 17W Smooth PAR38 - 4100K 25°, Black | 120 | 17 | 120 | 1400 | 76.5 | 6360 | 25 | 4100K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED17P38D41KSPB | Dimmable 17W Smooth PAR38 - 4100K 15°, Black | 120 | 17 | 120 | 1400 | 76.5 | 10176 | 15 | 4100K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED14P38D24KFLB | Dimmable 14W Smooth PAR38 - 2400K 40°, Black | 120 | 14 | 90 | 1050 | 75.0 | 1840 | 40 | 2400K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED14P38D24KNFLB | Dimmable 14W Smooth PAR38 - 2400K 25°, Black | 120 | 14 | 90 | 1050 | 75.0 | 4876 | 25 | 2400K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED14P38D24KSPB | Dimmable 14W Smooth PAR38 - 2400K 15°, Black | 120 | 14 | 90 | 1050 | 75.0 | 7802 | 15 | 2400K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED14P38D27KFLB | Dimmable 14W Smooth PAR38 - 2700K 40°, Black | 120 | 14 | 90 | 1050 | 75.0 | 1840 | 40 | 2700K | 82 | 5.3 | 4.8 | 12 | STK |
| LED14P38D27KNFLB | Dimmable 14W Smooth PAR38 - 2700K 25°, Black | 120 | 14 | 90 | 1000 | 71.4 | 4876 | 25 | 2700K | 82 | 5.3 | 4.8 | 12 | STK |
| LED14P38D27KSPB | Dimmable 14W Smooth PAR38 - 2700K 15°, Black | 120 | 14 | 90 | 1050 | 75.0 | 7802 | 15 | 2700K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED14P38D30KFLB | Dimmable 14W Smooth PAR38 - 3000K 40°, Black | 120 | 14 | 90 | 1100 | 78.6 | 2000 | 40 | 3000K | 82 | 5.3 | 4.8 | 12 | STK |
| LED14P38D30KNFLB | Dimmable 14W Smooth PAR38 - 3000K 25°, Black | 120 | 14 | 90 | 1100 | 78.6 | 5300 | 25 | 3000K | 82 | 5.3 | 4.8 | 12 | STK |
| LED14P38D30KSPB | Dimmable 14W Smooth PAR38 - 3000K 15°, Black | 120 | 14 | 90 | 1100 | 78.6 | 8480 | 15 | 3000K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED14P38D35KFLB | Dimmable 14W Smooth PAR38 - 3500K 40°, Black | 120 | 14 | 90 | 1125 | 80.4 | 2060 | 40 | 3500K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED14P38D35KNFLB | Dimmable 14W Smooth PAR38 - 3500K 25°, Black | 120 | 14 | 90 | 1125 | 80.4 | 5459 | 25 | 3500K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED14P38D35KSPB | Dimmable 14W Smooth PAR38 - 3500K 15°, Black | 120 | 14 | 90 | 1125 | 80.4 | 8734 | 15 | 3500K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED14P38D41KFLB | Dimmable 14W Smooth PAR38 - 4100K 40°, Black | 120 | 14 | 90 | 1150 | 82.1 | 2120 | 40 | 4100K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED14P38D41KNFLB | Dimmable 14W Smooth PAR38 - 4100K 25°, Black | 120 | 14 | 90 | 1150 | 82.1 | 5618 | 25 | 4100K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED14P38D41KSPB | Dimmable 14W Smooth PAR38 - 4100K 15°, Black | 120 | 14 | 90 | 1150 | 82.1 | 8989 | 15 | 4100K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED14P38D50KFLB | Dimmable 14W Smooth PAR38 - 5000K 40°, Black | 120 | 14 | 90 | 1150 | 82.1 | 2120 | 40 | 5000K | 82 | 5.3 | 4.8 | 12 | MTO |
| **PAR30** | | | | | | | | | | | | | | |
| LED14P30D24KFLB | Dimmable 14W Smooth PAR30 - 2400K 40°, Black | 120 | 14 | 90 | 1050 | 75.0 | 1840 | 40 | 2400K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED14P30D24KNFLB | Dimmable 14W Smooth PAR30 - 2400K 25°, Black | 120 | 14 | 90 | 1050 | 75.0 | 4876 | 25 | 2400K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED14P30D24KSPB | Dimmable 14W Smooth PAR30 - 2400K 15°, Black | 120 | 14 | 90 | 1050 | 75.0 | 7802 | 15 | 2400K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED14P30D27KFLB | Dimmable 14W Smooth PAR30 - 2700K 40°, Black | 120 | 14 | 90 | 1050 | 75.0 | 1840 | 40 | 2700K | 82 | 4.8 | 3.8 | 12 | STK |
| LED14P30D27KNFLB | Dimmable 14W Smooth PAR30 - 2700K 25°, Black | 120 | 14 | 90 | 1050 | 75.0 | 4876 | 25 | 2700K | 82 | 4.8 | 3.8 | 12 | STK |
| LED14P30D27KSPB | Dimmable 14W Smooth PAR30 - 2700K 15°, Black | 120 | 14 | 90 | 1050 | 75.0 | 7802 | 15 | 2700K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED14P30D30KFLB | Dimmable 14W Smooth PAR30 - 3000K 40°, Black | 120 | 14 | 90 | 1100 | 78.6 | 2000 | 40 | 3000K | 82 | 4.8 | 3.8 | 12 | STK |
| LED14P30D30KNFLB | Dimmable 14W Smooth PAR30 - 3000K 25°, Black | 120 | 14 | 90 | 1100 | 78.6 | 5300 | 25 | 3000K | 82 | 4.8 | 3.8 | 12 | STK |
| LED14P30D30KSPB | Dimmable 14W Smooth PAR30 - 3000K 15°, Black | 120 | 14 | 90 | 1100 | 78.6 | 8480 | 15 | 3000K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED14P30D35KFLB | Dimmable 14W Smooth PAR30 - 3500K 40°, Black | 120 | 14 | 90 | 1125 | 80.4 | 2060 | 40 | 3500K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED14P30D35KNFLB | Dimmable 14W Smooth PAR30 - 3500K 25°, Black | 120 | 14 | 90 | 1125 | 80.4 | 5459 | 25 | 3500K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED14P30D35KSPB | Dimmable 14W Smooth PAR30 - 3500K 15°, Black | 120 | 14 | 90 | 1125 | 80.4 | 8734 | 15 | 3500K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED14P30D41KFLB | Dimmable 14W Smooth PAR30 - 4100K 40°, Black | 120 | 14 | 90 | 1150 | 82.1 | 2120 | 40 | 4100K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED14P30D41KNFLB | Dimmable 14W Smooth PAR30 - 4100K 25°, Black | 120 | 14 | 90 | 1150 | 82.1 | 5618 | 25 | 4100K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED14P30D41KSPB | Dimmable 14W Smooth PAR30 - 4100K 15°, Black | 120 | 14 | 90 | 1150 | 82.1 | 8989 | 15 | 4100K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED12P30D24KFLB | Dimmable 12W Smooth PAR30 - 2400K 40°, Black | 120 | 12 | 75 | 800 | 66.7 | 1288 | 40 | 2400K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED12P30D24KNFLB | Dimmable 12W Smooth PAR30 - 2400K 25°, Black | 120 | 12 | 75 | 800 | 66.7 | 3450 | 25 | 2400K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED12P30D24KSPB | Dimmable 12W Smooth PAR30 - 2400K 15°, Black | 120 | 12 | 75 | 800 | 66.7 | 5520 | 15 | 2400K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED12P30D27KFLB | Dimmable 12W Smooth PAR30 - 2700K 40°, Black | 120 | 12 | 75 | 800 | 66.7 | 1288 | 40 | 2700K | 82 | 4.8 | 3.8 | 12 | STK |
| LED12P30D27KNFLB | Dimmable 12W Smooth PAR30 - 2700K 25°, Black | 120 | 12 | 75 | 800 | 66.7 | 3450 | 25 | 2700K | 82 | 4.8 | 3.8 | 12 | STK |
| LED12P30D27KSPB | Dimmable 12W Smooth PAR30 - 2700K 15°, Black | 120 | 12 | 75 | 800 | 66.7 | 5520 | 15 | 2700K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED12P30D30KFLB | Dimmable 12W Smooth PAR30 - 3000K 40°, Black | 120 | 12 | 75 | 825 | 68.8 | 1400 | 40 | 3000K | 82 | 4.8 | 3.8 | 12 | STK |
| LED12P30D30KNFLB | Dimmable 12W Smooth PAR30 - 3000K 25°, Black | 120 | 12 | 75 | 825 | 68.8 | 3750 | 25 | 3000K | 82 | 4.8 | 3.8 | 12 | STK |
| LED12P30D30KSPB | Dimmable 12W Smooth PAR30 - 3000K 15°, Black | 120 | 12 | 75 | 825 | 68.8 | 6000 | 15 | 3000K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED12P30D35KFLB | Dimmable 12W Smooth PAR30 - 3500K 40°, Black | 120 | 12 | 75 | 850 | 70.8 | 1442 | 40 | 3500K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED12P30D35KNFLB | Dimmable 12W Smooth PAR30 - 3500K 25°, Black | 120 | 12 | 75 | 850 | 70.8 | 3863 | 25 | 3500K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED12P30D35KSPB | Dimmable 12W Smooth PAR30 - 3500K 15°, Black | 120 | 12 | 75 | 850 | 70.8 | 6180 | 15 | 3500K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED12P30D41KFLB | Dimmable 12W Smooth PAR30 - 4100K 40°, Black | 120 | 12 | 75 | 875 | 72.9 | 1484 | 40 | 4100K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED12P30D41KNFLB | Dimmable 12W Smooth PAR30 - 4100K 25°, Black | 120 | 12 | 75 | 875 | 72.9 | 3975 | 25 | 4100K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED12P30D41KSPB | Dimmable 12W Smooth PAR30 - 4100K 15°, Black | 120 | 12 | 75 | 875 | 72.9 | 6360 | 15 | 4100K | 82 | 4.8 | 3.8 | 12 | MTO |

ENERGY STAR PARTNER

Smooth Uniform Dimming

| Item # | Description | Voltage | Wattage | Incandescent Wattage Comparison | Lumens | LPW | CBCP | Beam Angle | CCT | CRI | M.O.L. (inches) | Diameter (inches) | Case Quantity | STK/MTO |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **PAR30SN** | | | | | | | | | | | | | | |
| LED12P30SD24KFLB | Dimmable 12W Smooth PAR30 Short Neck - 2400K 40°, Black | 120 | 12 | 75 | 800 | 66.7 | 1288 | 40 | 2400K | 82 | 3.5 | 3.8 | 12 | MTO |
| LED12P30SD24KNFLB | Dimmable 12W Smooth PAR30 Short Neck - 2400K 25°, Black | 120 | 12 | 75 | 800 | 66.7 | 3450 | 25 | 2400K | 82 | 3.5 | 3.8 | 12 | MTO |
| LED12P30SD24KSPB | Dimmable 12W Smooth PAR30 Short Neck - 2400K 15°, Black | 120 | 12 | 75 | 800 | 66.7 | 5520 | 15 | 2400K | 82 | 3.5 | 3.8 | 12 | MTO |
| LED12P30SD27KFLB | Dimmable 12W Smooth PAR30 Short Neck - 2700K 40°, Black | 120 | 12 | 75 | 800 | 66.7 | 1288 | 40 | 2700K | 82 | 3.5 | 3.8 | 12 | STK |
| LED12P30SD27KNFLB | Dimmable 12W Smooth PAR30 Short Neck - 2700K 25°, Black | 120 | 12 | 75 | 800 | 66.7 | 3450 | 25 | 2700K | 82 | 3.5 | 3.8 | 12 | STK |
| LED12P30SD27KSPB | Dimmable 12W Smooth PAR30 Short Neck - 2700K 15°, Black | 120 | 12 | 75 | 800 | 66.7 | 5520 | 15 | 2700K | 82 | 3.5 | 3.8 | 12 | MTO |
| LED12P30SD30KFLB | Dimmable 12W Smooth PAR30 Short Neck - 3000K 40°, Black | 120 | 12 | 75 | 825 | 68.8 | 1400 | 40 | 3000K | 82 | 3.5 | 3.8 | 12 | STK |
| LED12P30SD30KNFLB | Dimmable 12W Smooth PAR30 Short Neck - 3000K 25°, Black | 120 | 12 | 75 | 825 | 68.8 | 3750 | 25 | 3000K | 82 | 3.5 | 3.8 | 12 | STK |
| LED12P30SD30KSPB | Dimmable 12W Smooth PAR30 Short Neck - 3000K 15°, Black | 120 | 12 | 75 | 825 | 68.8 | 6000 | 15 | 3000K | 82 | 3.5 | 3.8 | 12 | MTO |
| LED12P30SD35KFLB | Dimmable 12W Smooth PAR30 Short Neck - 3500K 40°, Black | 120 | 12 | 75 | 850 | 70.8 | 1442 | 40 | 3500K | 82 | 3.5 | 3.8 | 12 | MTO |
| LED12P30SD35KNFLB | Dimmable 12W Smooth PAR30 Short Neck - 3500K 25°, Black | 120 | 12 | 75 | 850 | 70.8 | 3863 | 25 | 3500K | 82 | 3.5 | 3.8 | 12 | MTO |
| LED12P30SD35KSPB | Dimmable 12W Smooth PAR30 Short Neck - 3500K 15°, Black | 120 | 12 | 75 | 850 | 70.8 | 6180 | 15 | 3500K | 82 | 3.5 | 3.8 | 12 | MTO |
| LED12P30SD41KFLB | Dimmable 12W Smooth PAR30 Short Neck - 4100K 40°, Black | 120 | 12 | 75 | 875 | 72.9 | 1484 | 40 | 4100K | 82 | 3.5 | 3.8 | 12 | MTO |
| LED12P30SD41KNFLB | Dimmable 12W Smooth PAR30 Short Neck - 4100K 25°, Black | 120 | 12 | 75 | 875 | 72.9 | 3975 | 25 | 4100K | 82 | 3.5 | 3.8 | 12 | MTO |
| LED12P30SD41KSPB | Dimmable 12W Smooth PAR30 Short Neck - 4100K 15°, Black | 120 | 12 | 75 | 875 | 72.9 | 6360 | 15 | 4100K | 82 | 3.5 | 3.8 | 12 | MTO |
| LED10P30SD24KFLB | Dimmable 10W Smooth PAR30 Short Neck - 2400K 40°, Black | 120 | 10 | 60 | 600 | 60.0 | 985 | 40 | 2400K | 82 | 3.5 | 3.8 | 12 | MTO |
| LED10P30SD24KNFLB | Dimmable 10W Smooth PAR30 Short Neck - 2400K 25°, Black | 120 | 10 | 60 | 600 | 60.0 | 2639 | 25 | 2400K | 82 | 3.5 | 3.8 | 12 | MTO |
| LED10P30SD24KSPB | Dimmable 10W Smooth PAR30 Short Neck - 2400K 15°, Black | 120 | 10 | 60 | 600 | 60.0 | 4221 | 15 | 2400K | 82 | 3.5 | 3.8 | 12 | MTO |
| LED10P30SD27KFLB | Dimmable 10W Smooth PAR30 Short Neck - 2700K 40°, Black | 120 | 10 | 60 | 600 | 60.0 | 985 | 40 | 2700K | 82 | 3.5 | 3.8 | 12 | STK |
| LED10P30SD27KNFLB | Dimmable 10W Smooth PAR30 Short Neck - 2700K 25°, Black | 120 | 10 | 60 | 600 | 60.0 | 2639 | 25 | 2700K | 82 | 3.5 | 3.8 | 12 | STK |
| LED10P30SD27KSPB | Dimmable 10W Smooth PAR30 Short Neck - 2700K 15°, Black | 120 | 10 | 60 | 600 | 60.0 | 4221 | 15 | 2700K | 82 | 3.5 | 3.8 | 12 | MTO |
| LED10P30SD30KFLB | Dimmable 10W Smooth PAR30 Short Neck - 3000K 40°, Black | 120 | 10 | 60 | 650 | 65.0 | 1071 | 40 | 3000K | 82 | 3.5 | 3.8 | 12 | STK |
| LED10P30SD30KNFLB | Dimmable 10W Smooth PAR30 Short Neck - 3000K 25°, Black | 120 | 10 | 60 | 650 | 65.0 | 2868 | 25 | 3000K | 82 | 3.5 | 3.8 | 12 | STK |
| LED10P30SD30KSPB | Dimmable 10W Smooth PAR30 Short Neck - 3000K 15°, Black | 120 | 10 | 60 | 650 | 65.0 | 4588 | 15 | 3000K | 82 | 3.5 | 3.8 | 12 | MTO |
| LED10P30SD35KFLB | Dimmable 10W Smooth PAR30 Short Neck - 3500K 40°, Black | 120 | 10 | 60 | 675 | 67.5 | 1103 | 40 | 3500K | 82 | 3.5 | 3.8 | 12 | MTO |
| LED10P30SD35KNFLB | Dimmable 10W Smooth PAR30 Short Neck - 3500K 25°, Black | 120 | 10 | 60 | 675 | 67.5 | 2954 | 25 | 3500K | 82 | 3.5 | 3.8 | 12 | MTO |
| LED10P30SD35KSPB | Dimmable 10W Smooth PAR30 Short Neck - 3500K 15°, Black | 120 | 10 | 60 | 675 | 67.5 | 4726 | 15 | 3500K | 82 | 3.5 | 3.8 | 12 | MTO |
| LED10P30SD41KFLB | Dimmable 10W Smooth PAR30 Short Neck - 4100K 40°, Black | 120 | 10 | 60 | 700 | 70.0 | 1135 | 40 | 4100K | 82 | 3.5 | 3.8 | 12 | MTO |
| LED10P30SD41KNFLB | Dimmable 10W Smooth PAR30 Short Neck - 4100K 25°, Black | 120 | 10 | 60 | 700 | 70.0 | 3040 | 25 | 4100K | 82 | 3.5 | 3.8 | 12 | MTO |
| LED10P30SD41KSPB | Dimmable 10W Smooth PAR30 Short Neck - 4100K 15°, Black | 120 | 10 | 60 | 700 | 70.0 | 4863 | 15 | 4100K | 82 | 3.5 | 3.8 | 12 | MTO |
| **PAR20** | | | | | | | | | | | | | | |
| LED10P20D24KFLB | Dimmable 10W Smooth PAR20 - 2400K 40°, Black | 120 | 10 | 60 | 600 | 60.0 | TBD | 40 | 2400K | 82 | 3.5 | 2.5 | 12 | MTO |
| LED10P20D24KNFLB | Dimmable 10W Smooth PAR20 - 2400K 25°, Black | 120 | 10 | 60 | 600 | 60.0 | TBD | 25 | 2400K | 82 | 3.5 | 2.5 | 12 | MTO |
| LED10P20D27KFLB | Dimmable 10W Smooth PAR20 - 2700K 40°, Black | 120 | 10 | 60 | 600 | 60.0 | TBD | 40 | 2700K | 82 | 3.5 | 2.5 | 12 | STK |
| LED10P20D27KNFLB | Dimmable 10W Smooth PAR20 - 2700K 25°, Black | 120 | 10 | 60 | 600 | 60.0 | TBD | 25 | 2700K | 82 | 3.5 | 2.5 | 12 | STK |
| LED10P20D30KFLB | Dimmable 10W Smooth PAR20 - 3000K 40°, Black | 120 | 10 | 60 | 650 | 65.0 | TBD | 40 | 3000K | 82 | 3.5 | 2.5 | 12 | STK |
| LED10P20D30KNFLB | Dimmable 10W Smooth PAR20 - 3000K 25°, Black | 120 | 10 | 60 | 650 | 65.0 | TBD | 25 | 3000K | 82 | 3.5 | 2.5 | 12 | STK |
| LED10P20D35KFLB | Dimmable 10W Smooth PAR20 - 3500K 40°, Black | 120 | 10 | 60 | 675 | 67.5 | TBD | 40 | 3500K | 82 | 3.5 | 2.5 | 12 | MTO |
| LED10P20D35KNFLB | Dimmable 10W Smooth PAR20 - 3500K 25°, Black | 120 | 10 | 60 | 675 | 67.5 | TBD | 25 | 3500K | 82 | 3.5 | 2.5 | 12 | MTO |
| LED10P20D41KFLB | Dimmable 10W Smooth PAR20 - 4100K 40°, Black | 120 | 10 | 60 | 700 | 70.0 | TBD | 40 | 4100K | 82 | 3.5 | 2.5 | 12 | MTO |
| LED10P20D41KNFLB | Dimmable 10W Smooth PAR20 - 4100K 25°, Black | 120 | 10 | 60 | 700 | 70.0 | TBD | 25 | 4100K | 82 | 3.5 | 2.5 | 12 | MTO |
| LED8P20D24KFLB | Dimmable 8W Smooth PAR20 - 2400K 40°, Black | 120 | 8 | 50 | 500 | 62.5 | 754 | 40 | 2400K | 82 | 3.5 | 2.5 | 12 | MTO |
| LED8P20D24KNFLB | Dimmable 8W Smooth PAR20 - 2400K 25°, Black | 120 | 8 | 50 | 500 | 62.5 | 2070 | 25 | 2400K | 82 | 3.5 | 2.5 | 12 | MTO |
| LED8P20D27KFLB | Dimmable 8W Smooth PAR20 - 2700K 40°, Black | 120 | 8 | 50 | 500 | 62.5 | 754 | 40 | 2700K | 82 | 3.5 | 2.5 | 12 | STK |
| LED8P20D27KNFLB | Dimmable 8W Smooth PAR20 - 2700K 25°, Black | 120 | 8 | 50 | 500 | 62.5 | 2070 | 25 | 2700K | 82 | 3.5 | 2.5 | 12 | STK |
| LED8P20D30KFLB | Dimmable 8W Smooth PAR20 - 3000K 40°, Black | 120 | 8 | 50 | 515 | 64.4 | 820 | 40 | 3000K | 82 | 3.5 | 2.5 | 12 | STK |
| LED8P20D30KNFLB | Dimmable 8W Smooth PAR20 - 3000K 25°, Black | 120 | 8 | 50 | 515 | 64.4 | 2250 | 25 | 3000K | 82 | 3.5 | 2.5 | 12 | STK |
| LED8P20D35KFLB | Dimmable 8W Smooth PAR20 - 3500K 40°, Black | 120 | 8 | 50 | 525 | 65.6 | 845 | 40 | 3500K | 82 | 3.5 | 2.5 | 12 | MTO |
| LED8P20D35KNFLB | Dimmable 8W Smooth PAR20 - 3500K 25°, Black | 120 | 8 | 50 | 525 | 65.6 | 2318 | 25 | 3500K | 82 | 3.5 | 2.5 | 12 | MTO |
| LED8P20D41KFLB | Dimmable 8W Smooth PAR20 - 4100K 40°, Black | 120 | 8 | 50 | 530 | 66.3 | 869 | 40 | 4100K | 82 | 3.5 | 2.5 | 12 | MTO |
| LED8P20D41KNFLB | Dimmable 8W Smooth PAR20 - 4100K 25°, Black | 120 | 8 | 50 | 530 | 66.3 | 2385 | 25 | 4100K | 82 | 3.5 | 2.5 | 12 | MTO |

c UL us 5 YEAR WARRANTY

For the most up-to-date specs, please visit www.tcpi.com

ENERGY STAR PARTNER

| Item # | Description | Voltage | Wattage | Incandescent Wattage Comparison | Lumens | LPW | CBCP | Beam Angle | CCT | CRI | M.O.L. (inches) | Diameter (inches) | Case Quantity | STK/MTO |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **PAR38** | | | | | | | | | | | | | | |
| LED17P3824KFLB | Non-Dimmable 17W Smooth PAR38 - 2400K 40°, Black | 120 | 17 | 120 | 1200 | 70.6 | 2024 | 40 | 2400K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED17P3824KNFLB | Non-Dimmable 17W Smooth PAR38 - 2400K 25°, Black | 120 | 17 | 120 | 1200 | 70.6 | 5520 | 25 | 2400K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED17P3824KSPB | Non-Dimmable 17W Smooth PAR38 - 2400K 15°, Black | 120 | 17 | 120 | 1200 | 70.6 | 8832 | 15 | 2400K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED17P3827KFLB | Non-Dimmable 17W Smooth PAR38 - 2700K 40°, Black | 120 | 17 | 120 | 1200 | 70.6 | 2024 | 40 | 2700K | 82 | 5.3 | 4.8 | 12 | STK |
| LED17P3827KNFLB | Non-Dimmable 17W Smooth PAR38 - 2700K 25°, Black | 120 | 17 | 120 | 1200 | 70.6 | 5520 | 25 | 2700K | 82 | 5.3 | 4.8 | 12 | STK |
| LED17P3827KSPB | Non-Dimmable 17W Smooth PAR38 - 2700K 15°, Black | 120 | 17 | 120 | 1200 | 70.6 | 8832 | 15 | 2700K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED17P3830KFLB | Non-Dimmable 17W Smooth PAR38 - 3000K 40°, Black | 120 | 17 | 120 | 1250 | 73.5 | 2200 | 40 | 3000K | 82 | 5.3 | 4.8 | 12 | STK |
| LED17P3830KNFLB | Non-Dimmable 17W Smooth PAR38 - 3000K 25°, Black | 120 | 17 | 120 | 1250 | 73.5 | 6000 | 25 | 3000K | 82 | 5.3 | 4.8 | 12 | STK |
| LED17P3830KSPB | Non-Dimmable 17W Smooth PAR38 - 3000K 15°, Black | 120 | 17 | 120 | 1250 | 73.5 | 9600 | 15 | 3000K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED17P3835KFLB | Non-Dimmable 17W Smooth PAR38 - 3500K 40°, Black | 120 | 17 | 120 | 1275 | 75.0 | 2266 | 40 | 3500K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED17P3835KNFLB | Non-Dimmable 17W Smooth PAR38 - 3500K 25°, Black | 120 | 17 | 120 | 1275 | 75.0 | 6180 | 25 | 3500K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED17P3835KSPB | Non-Dimmable 17W Smooth PAR38 - 3500K 15°, Black | 120 | 17 | 120 | 1275 | 75.0 | 9888 | 15 | 3500K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED17P3841KFLB | Non-Dimmable 17W Smooth PAR38 - 4100K 40°, Black | 120 | 17 | 120 | 1300 | 76.5 | 2332 | 40 | 4100K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED17P3841KNFLB | Non-Dimmable 17W Smooth PAR38 - 4100K 25°, Black | 120 | 17 | 120 | 1300 | 76.5 | 6360 | 25 | 4100K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED17P3841KSPB | Non-Dimmable 17W Smooth PAR38 - 4100K 15°, Black | 120 | 17 | 120 | 1300 | 76.5 | 10176 | 15 | 4100K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED17P3850KFLB | Non-Dimmable 17W Smooth PAR38 - 5000K 40°, Black | 120 | 17 | 120 | 1300 | 76.5 | 2332 | 40 | 5000K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED17P3850KNFLB | Non-Dimmable 17W Smooth PAR38 - 5000K 25°, Black | 120 | 17 | 120 | 1300 | 76.5 | 6360 | 25 | 5000K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED17P3850KSPB | Non-Dimmable 17W Smooth PAR38 - 5000K 15°, Black | 120 | 17 | 120 | 1300 | 76.5 | 10176 | 15 | 5000K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED14P3824KFLB | Non-Dimmable 14W Smooth PAR38 - 2400K 40°, Black | 120 | 14 | 90 | 1050 | 75.0 | 1840 | 40 | 2400K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED14P3824KNFLB | Non-Dimmable 14W Smooth PAR38 - 2400K 25°, Black | 120 | 14 | 90 | 1050 | 75.0 | 4876 | 25 | 2400K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED14P3824KSPB | Non-Dimmable 14W Smooth PAR38 - 2400K 15°, Black | 120 | 14 | 90 | 1050 | 75.0 | 7802 | 15 | 2400K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED14P3827KFLB | Non-Dimmable 14W Smooth PAR38 - 2700K 40°, Black | 120 | 14 | 90 | 1050 | 75.0 | 1840 | 40 | 2700K | 82 | 5.3 | 4.8 | 12 | STK |
| LED14P3827KNFLB | Non-Dimmable 14W Smooth PAR38 - 2700K 25°, Black | 120 | 14 | 90 | 1050 | 75.0 | 4876 | 25 | 2700K | 82 | 5.3 | 4.8 | 12 | STK |
| LED14P3827KSPB | Non-Dimmable 14W Smooth PAR38 - 2700K 15°, Black | 120 | 14 | 90 | 1050 | 75.0 | 7802 | 15 | 2700K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED14P3830KFLB | Non-Dimmable 14W Smooth PAR38 - 3000K 40°, Black | 120 | 14 | 90 | 1100 | 78.6 | 2000 | 40 | 3000K | 82 | 5.3 | 4.8 | 12 | STK |
| LED14P3830KNFLB | Non-Dimmable 14W Smooth PAR38 - 3000K 25°, Black | 120 | 14 | 90 | 1100 | 78.6 | 5300 | 25 | 3000K | 82 | 5.3 | 4.8 | 12 | STK |
| LED14P3830KSPB | Non-Dimmable 14W Smooth PAR38 - 3000K 15°, Black | 120 | 14 | 90 | 1100 | 78.6 | 8480 | 15 | 3000K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED14P3835KFLB | Non-Dimmable 14W Smooth PAR38 - 3500K 40°, Black | 120 | 14 | 90 | 1125 | 80.4 | 2060 | 40 | 3500K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED14P3835KNFLB | Non-Dimmable 14W Smooth PAR38 - 3500K 25°, Black | 120 | 14 | 90 | 1125 | 80.4 | 5459 | 25 | 3500K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED14P3835KSPB | Non-Dimmable 14W Smooth PAR38 - 3500K 15°, Black | 120 | 14 | 90 | 1125 | 80.4 | 8734 | 15 | 3500K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED14P3841KFLB | Non-Dimmable 14W Smooth PAR38 - 4100K 40°, Black | 120 | 14 | 90 | 1150 | 82.1 | 2120 | 40 | 4100K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED14P3841KNFLB | Non-Dimmable 14W Smooth PAR38 - 4100K 25°, Black | 120 | 14 | 90 | 1150 | 82.1 | 5618 | 25 | 4100K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED14P3841KSPB | Non-Dimmable 14W Smooth PAR38 - 4100K 15°, Black | 120 | 14 | 90 | 1150 | 82.1 | 8989 | 15 | 4100K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED14P3850KFLB | Non-Dimmable 14W Smooth PAR38 - 5000K 40°, Black | 120 | 14 | 90 | 1150 | 82.1 | 2120 | 40 | 5000K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED14P3850KNFLB | Non-Dimmable 14W Smooth PAR38 - 5000K 25°, Black | 120 | 14 | 90 | 1150 | 82.1 | 5618 | 25 | 5000K | 82 | 5.3 | 4.8 | 12 | MTO |
| LED14P3850KSPB | Non-Dimmable 14W Smooth PAR38 - 5000K 15°, Black | 120 | 14 | 90 | 1150 | 82.1 | 8989 | 15 | 5000K | 82 | 5.3 | 4.8 | 12 | MTO |
| **PAR30** | | | | | | | | | | | | | | |
| LED14P3024KFLB | Non-Dimmable 14W Smooth PAR30 - 2400K 40°, Black | 120 | 14 | 90 | 1050 | 75.0 | 1840 | 40 | 2400K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED14P3024KNFLB | Non-Dimmable 14W Smooth PAR30 - 2400K 25°, Black | 120 | 14 | 90 | 1050 | 75.0 | 4876 | 25 | 2400K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED14P3024KSPB | Non-Dimmable 14W Smooth PAR30 - 2400K 15°, Black | 120 | 14 | 90 | 1050 | 75.0 | 7802 | 15 | 2400K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED14P3027KFLB | Non-Dimmable 14W Smooth PAR30 - 2700K 40°, Black | 120 | 14 | 90 | 1050 | 75.0 | 1840 | 40 | 2700K | 82 | 4.8 | 3.8 | 12 | STK |
| LED14P3027KNFLB | Non-Dimmable 14W Smooth PAR30 - 2700K 25°, Black | 120 | 14 | 90 | 1050 | 75.0 | 4876 | 25 | 2700K | 82 | 4.8 | 3.8 | 12 | STK |
| LED14P3027KSPB | Non-Dimmable 14W Smooth PAR30 - 2700K 15°, Black | 120 | 14 | 90 | 1050 | 75.0 | 7802 | 15 | 2700K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED14P3030KFLB | Non-Dimmable 14W Smooth PAR30 - 3000K 40°, Black | 120 | 14 | 90 | 1100 | 78.6 | 2000 | 40 | 3000K | 82 | 4.8 | 3.8 | 12 | STK |
| LED14P3030KNFLB | Non-Dimmable 14W Smooth PAR30 - 3000K 25°, Black | 120 | 14 | 90 | 1100 | 78.6 | 5300 | 25 | 3000K | 82 | 4.8 | 3.8 | 12 | STK |
| LED14P3030KSPB | Non-Dimmable 14W Smooth PAR30 - 3000K 15°, Black | 120 | 14 | 90 | 1100 | 78.6 | 8480 | 15 | 3000K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED14P3035KFLB | Non-Dimmable 14W Smooth PAR30 - 3500K 40°, Black | 120 | 14 | 90 | 1125 | 80.4 | 2060 | 40 | 3500K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED14P3035KNFLB | Non-Dimmable 14W Smooth PAR30 - 3500K 25°, Black | 120 | 14 | 90 | 1125 | 80.4 | 5459 | 25 | 3500K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED14P3035KSPB | Non-Dimmable 14W Smooth PAR30 - 3500K 15°, Black | 120 | 14 | 90 | 1125 | 80.4 | 8734 | 15 | 3500K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED14P3041KFLB | Non-Dimmable 14W Smooth PAR30 - 4100K 40°, Black | 120 | 14 | 90 | 1150 | 82.1 | 2120 | 40 | 4100K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED14P3041KNFLB | Non-Dimmable 14W Smooth PAR30 - 4100K 25°, Black | 120 | 14 | 90 | 1150 | 82.1 | 5618 | 25 | 4100K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED14P3041KSPB | Non-Dimmable 14W Smooth PAR30 - 4100K 15°, Black | 120 | 14 | 90 | 1150 | 82.1 | 8989 | 15 | 4100K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED14P3050KFLB | Non-Dimmable 14W Smooth PAR30 - 5000K 40°, Black | 120 | 14 | 90 | 1150 | 82.1 | 2120 | 40 | 5000K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED14P3050KNFLB | Non-Dimmable 14W Smooth PAR30 - 5000K 25°, Black | 120 | 14 | 90 | 1150 | 82.1 | 5618 | 25 | 5000K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED14P3050KSPB | Non-Dimmable 14W Smooth PAR30 - 5000K 15°, Black | 120 | 14 | 90 | 1150 | 82.1 | 8989 | 15 | 5000K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED12P3024KFLB | Non-Dimmable 12W Smooth PAR30 - 2400K 40°, Black | 120 | 12 | 75 | 800 | 66.7 | 1288 | 40 | 2400K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED12P3024KNFLB | Non-Dimmable 12W Smooth PAR30 - 2400K 25°, Black | 120 | 12 | 75 | 800 | 66.7 | 3450 | 25 | 2400K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED12P3024KSPB | Non-Dimmable 12W Smooth PAR30 - 2400K 15°, Black | 120 | 12 | 75 | 800 | 66.7 | 5520 | 15 | 2400K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED12P3027KFLB | Non-Dimmable 12W Smooth PAR30 - 2700K 40°, Black | 120 | 12 | 75 | 800 | 66.7 | 1288 | 40 | 2700K | 82 | 4.8 | 3.8 | 12 | STK |
| LED12P3027KNFLB | Non-Dimmable 12W Smooth PAR30 - 2700K 25°, Black | 120 | 12 | 75 | 800 | 66.7 | 3450 | 25 | 2700K | 82 | 4.8 | 3.8 | 12 | STK |
| LED12P3027KSPB | Non-Dimmable 12W Smooth PAR30 - 2700K 15°, Black | 120 | 12 | 75 | 800 | 66.7 | 5520 | 15 | 2700K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED12P3030KFLB | Non-Dimmable 12W Smooth PAR30 - 3000K 40°, Black | 120 | 12 | 75 | 825 | 68.8 | 1400 | 40 | 3000K | 82 | 4.8 | 3.8 | 12 | STK |
| LED12P3030KNFLB | Non-Dimmable 12W Smooth PAR30 - 3000K 25°, Black | 120 | 12 | 75 | 825 | 68.8 | 3750 | 25 | 3000K | 82 | 4.8 | 3.8 | 12 | STK |
| LED12P3030KSPB | Non-Dimmable 12W Smooth PAR30 - 3000K 15°, Black | 120 | 12 | 75 | 825 | 68.8 | 6000 | 15 | 3000K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED12P3035KFLB | Non-Dimmable 12W Smooth PAR30 - 3500K 40°, Black | 120 | 12 | 75 | 850 | 70.8 | 1442 | 40 | 3500K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED12P3035KNFLB | Non-Dimmable 12W Smooth PAR30 - 3500K 25°, Black | 120 | 12 | 75 | 850 | 70.8 | 3863 | 25 | 3500K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED12P3035KSPB | Non-Dimmable 12W Smooth PAR30 - 3500K 15°, Black | 120 | 12 | 75 | 850 | 70.8 | 6180 | 15 | 3500K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED12P3041KFLB | Non-Dimmable 12W Smooth PAR30 - 4100K 40°, Black | 120 | 12 | 75 | 875 | 72.9 | 1484 | 40 | 4100K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED12P3041KNFLB | Non-Dimmable 12W Smooth PAR30 - 4100K 25°, Black | 120 | 12 | 75 | 875 | 72.9 | 3975 | 25 | 4100K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED12P3041KSPB | Non-Dimmable 12W Smooth PAR30 - 4100K 15°, Black | 120 | 12 | 75 | 875 | 72.9 | 6360 | 15 | 4100K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED12P3050KFLB | Non-Dimmable 12W Smooth PAR30 - 5000K 40°, Black | 120 | 12 | 75 | 875 | 72.9 | 1484 | 40 | 5000K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED12P3050KNFLB | Non-Dimmable 12W Smooth PAR30 - 5000K 25°, Black | 120 | 12 | 75 | 875 | 72.9 | 3975 | 25 | 5000K | 82 | 4.8 | 3.8 | 12 | MTO |
| LED12P3050KSPB | Non-Dimmable 12W Smooth PAR30 - 5000K 15°, Black | 120 | 12 | 75 | 875 | 72.9 | 6360 | 15 | 5000K | 82 | 4.8 | 3.8 | 12 | MTO |

ENERGY STAR PARTNER

# TCP ELITE Designer Series — LED Non-Dimmable PAR Lamps

| Item # | Description | Voltage | Wattage | Incandescent Wattage Comparison | Lumens | LPW | CBCP | Beam Angle | CCT | CRI | M.O.L. (inches) | Diameter (inches) | Case Quantity | STK/MTO |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **PAR30SN** | | | | | | | | | | | | | | |
| LED12P30S24KFLB | Non-Dimmable 12W Smooth PAR30 Short Neck - 2400K 40°, Black | 120 | 12 | 75 | 800 | 66.7 | 1288 | 40 | 2400K | 82 | 3.5 | 3.8 | 12 | MTO |
| LED12P30S24KNFLB | Non-Dimmable 12W Smooth PAR30 Short Neck - 2400K 25°, Black | 120 | 12 | 75 | 800 | 66.7 | 3450 | 25 | 2400K | 82 | 3.5 | 3.8 | 12 | MTO |
| LED12P30S24KSPB | Non-Dimmable 12W Smooth PAR30 Short Neck - 2400K 15°, Black | 120 | 12 | 75 | 800 | 66.7 | 5520 | 15 | 2400K | 82 | 3.5 | 3.8 | 12 | MTO |
| LED12P30S27KFLB | Non-Dimmable 12W Smooth PAR30 Short Neck - 2700K 40°, Black | 120 | 12 | 75 | 800 | 66.7 | 1288 | 40 | 2700K | 82 | 3.5 | 3.8 | 12 | STK |
| LED12P30S27KNFLB | Non-Dimmable 12W Smooth PAR30 Short Neck - 2700K 25°, Black | 120 | 12 | 75 | 800 | 66.7 | 3450 | 25 | 2700K | 82 | 3.5 | 3.8 | 12 | STK |
| LED12P30S27KSPB | Non-Dimmable 12W Smooth PAR30 Short Neck - 2700K 15°, Black | 120 | 12 | 75 | 800 | 66.7 | 5520 | 15 | 2700K | 82 | 3.5 | 3.8 | 12 | MTO |
| LED12P30S30KFLB | Non-Dimmable 12W Smooth PAR30 Short Neck - 3000K 40°, Black | 120 | 12 | 75 | 825 | 68.8 | 1400 | 40 | 3000K | 82 | 3.5 | 3.8 | 12 | STK |
| LED12P30S30KNFLB | Non-Dimmable 12W Smooth PAR30 Short Neck - 3000K 25°, Black | 120 | 12 | 75 | 825 | 68.8 | 3750 | 25 | 3000K | 82 | 3.5 | 3.8 | 12 | STK |
| LED12P30S30KSPB | Non-Dimmable 12W Smooth PAR30 Short Neck - 3000K 15°, Black | 120 | 12 | 75 | 825 | 68.8 | 6000 | 15 | 3000K | 82 | 3.5 | 3.8 | 12 | MTO |
| LED12P30S35KFLB | Non-Dimmable 12W Smooth PAR30 Short Neck - 3500K 40°, Black | 120 | 12 | 75 | 850 | 70.8 | 1442 | 40 | 3500K | 82 | 3.5 | 3.8 | 12 | MTO |
| LED12P30S35KNFLB | Non-Dimmable 12W Smooth PAR30 Short Neck - 3500K 25°, Black | 120 | 12 | 75 | 850 | 70.8 | 3863 | 25 | 3500K | 82 | 3.5 | 3.8 | 12 | MTO |
| LED12P30S35KSPB | Non-Dimmable 12W Smooth PAR30 Short Neck - 3500K 15°, Black | 120 | 12 | 75 | 850 | 70.8 | 6180 | 15 | 3500K | 82 | 3.5 | 3.8 | 12 | MTO |
| LED12P30S41KFLB | Non-Dimmable 12W Smooth PAR30 Short Neck - 4100K 40°, Black | 120 | 12 | 75 | 875 | 72.9 | 1484 | 40 | 4100K | 82 | 3.5 | 3.8 | 12 | MTO |
| LED12P30S41KNFLB | Non-Dimmable 12W Smooth PAR30 Short Neck - 4100K 25°, Black | 120 | 12 | 75 | 875 | 72.9 | 3975 | 25 | 4100K | 82 | 3.5 | 3.8 | 12 | MTO |
| LED12P30S41KSPB | Non-Dimmable 12W Smooth PAR30 Short Neck - 4100K 15°, Black | 120 | 12 | 75 | 875 | 72.9 | 6360 | 15 | 4100K | 82 | 3.5 | 3.8 | 12 | MTO |
| LED10P30S24KFLB | Non-Dimmable 10W Smooth PAR30 Short Neck - 2400K 40°, Black | 120 | 10 | 60 | 600 | 60.0 | 985 | 40 | 2400K | 82 | 3.5 | 3.8 | 12 | MTO |
| LED10P30S24KNFLB | Non-Dimmable 10W Smooth PAR30 Short Neck - 2400K 25°, Black | 120 | 10 | 60 | 600 | 60.0 | 2639 | 25 | 2400K | 82 | 3.5 | 3.8 | 12 | MTO |
| LED10P30S24KSPB | Non-Dimmable 10W Smooth PAR30 Short Neck - 2400K 15°, Black | 120 | 10 | 60 | 600 | 60.0 | 4221 | 15 | 2400K | 82 | 3.5 | 3.8 | 12 | MTO |
| LED10P30S27KFLB | Non-Dimmable 10W Smooth PAR30 Short Neck - 2700K 40°, Black | 120 | 10 | 60 | 600 | 60.0 | 985 | 40 | 2700K | 82 | 3.5 | 3.8 | 12 | STK |
| LED10P30S27KNFLB | Non-Dimmable 10W Smooth PAR30 Short Neck - 2700K 25°, Black | 120 | 10 | 60 | 600 | 60.0 | 2639 | 25 | 2700K | 82 | 3.5 | 3.8 | 12 | STK |
| LED10P30S27KSPB | Non-Dimmable 10W Smooth PAR30 Short Neck - 2700K 15°, Black | 120 | 10 | 60 | 600 | 60.0 | 4221 | 15 | 2700K | 82 | 3.5 | 3.8 | 12 | MTO |
| LED10P30S30KFLB | Non-Dimmable 10W Smooth PAR30 Short Neck - 3000K 40°, Black | 120 | 10 | 60 | 650 | 65.0 | 1071 | 40 | 3000K | 82 | 3.5 | 3.8 | 12 | STK |
| LED10P30S30KNFLB | Non-Dimmable 10W Smooth PAR30 Short Neck - 3000K 25°, Black | 120 | 10 | 60 | 650 | 65.0 | 2868 | 25 | 3000K | 82 | 3.5 | 3.8 | 12 | STK |
| LED10P30S30KSPB | Non-Dimmable 10W Smooth PAR30 Short Neck - 3000K 15°, Black | 120 | 10 | 60 | 650 | 65.0 | 4588 | 15 | 3000K | 82 | 3.5 | 3.8 | 12 | MTO |
| LED10P30S35KFLB | Non-Dimmable 10W Smooth PAR30 Short Neck - 3500K 40°, Black | 120 | 10 | 60 | 675 | 67.5 | 1103 | 40 | 3500K | 82 | 3.5 | 3.8 | 12 | MTO |
| LED10P30S35KNFLB | Non-Dimmable 10W Smooth PAR30 Short Neck - 3500K 25°, Black | 120 | 10 | 60 | 675 | 67.5 | 2954 | 25 | 3500K | 82 | 3.5 | 3.8 | 12 | MTO |
| LED10P30S35KSPB | Non-Dimmable 10W Smooth PAR30 Short Neck - 3500K 15°, Black | 120 | 10 | 60 | 675 | 67.5 | 4726 | 15 | 3500K | 82 | 3.5 | 3.8 | 12 | MTO |
| LED10P30S41KFLB | Non-Dimmable 10W Smooth PAR30 Short Neck - 4100K 40°, Black | 120 | 10 | 60 | 700 | 70.0 | 1135 | 40 | 4100K | 82 | 3.5 | 3.8 | 12 | MTO |
| LED10P30S41KNFLB | Non-Dimmable 10W Smooth PAR30 Short Neck - 4100K 25°, Black | 120 | 10 | 60 | 700 | 70.0 | 3040 | 25 | 4100K | 82 | 3.5 | 3.8 | 12 | MTO |
| LED10P30S41KSPB | Non-Dimmable 10W Smooth PAR30 Short Neck - 4100K 15°, Black | 120 | 10 | 60 | 700 | 70.0 | 4863 | 15 | 4100K | 82 | 3.5 | 3.8 | 12 | MTO |
| **PAR20** | | | | | | | | | | | | | | |
| LED10P2024KFLB | Non-Dimmable 10W Smooth PAR20 - 2400K 40°, Black | 120 | 10 | 60 | 600 | 60.0 | TBD | 40 | 2400K | 82 | 3.5 | 2.5 | 12 | MTO |
| LED10P2024KNFLB | Non-Dimmable 10W Smooth PAR20 - 2400K 25°, Black | 120 | 10 | 60 | 600 | 60.0 | TBD | 25 | 2400K | 82 | 3.5 | 2.5 | 12 | MTO |
| LED10P2027KFLB | Non-Dimmable 10W Smooth PAR20 - 2700K 40°, Black | 120 | 10 | 60 | 600 | 60.0 | TBD | 40 | 2700K | 82 | 3.5 | 2.5 | 12 | STK |
| LED10P2027KNFLB | Non-Dimmable 10W Smooth PAR20 - 2700K 25°, Black | 120 | 10 | 60 | 600 | 60.0 | TBD | 25 | 2700K | 82 | 3.5 | 2.5 | 12 | STK |
| LED10P2030KFLB | Non-Dimmable 10W Smooth PAR20 - 3000K 40°, Black | 120 | 10 | 60 | 650 | 65.0 | TBD | 40 | 3000K | 82 | 3.5 | 2.5 | 12 | STK |
| LED10P2030KNFLB | Non-Dimmable 10W Smooth PAR20 - 3000K 25°, Black | 120 | 10 | 60 | 650 | 65.0 | TBD | 25 | 3000K | 82 | 3.5 | 2.5 | 12 | STK |
| LED10P2035KFLB | Non-Dimmable 10W Smooth PAR20 - 3500K 40°, Black | 120 | 10 | 60 | 675 | 67.5 | TBD | 40 | 3500K | 82 | 3.5 | 2.5 | 12 | MTO |
| LED10P2035KNFLB | Non-Dimmable 10W Smooth PAR20 - 3500K 25°, Black | 120 | 10 | 60 | 675 | 67.5 | TBD | 25 | 3500K | 82 | 3.5 | 2.5 | 12 | MTO |
| LED10P2041KFLB | Non-Dimmable 10W Smooth PAR20 - 4100K 40°, Black | 120 | 10 | 60 | 700 | 70.0 | TBD | 40 | 4100K | 82 | 3.5 | 2.5 | 12 | MTO |
| LED10P2041KNFLB | Non-Dimmable 10W Smooth PAR20 - 4100K 25°, Black | 120 | 10 | 60 | 700 | 70.0 | TBD | 25 | 4100K | 82 | 3.5 | 2.5 | 12 | MTO |
| LED8P2024KFLB | Non-Dimmable 8W Smooth PAR20 - 2400K 40°, Black | 120 | 8 | 50 | 500 | 62.5 | 754 | 40 | 2400K | 82 | 3.5 | 2.5 | 12 | MTO |
| LED8P2024KNFLB | Non-Dimmable 8W Smooth PAR20 - 2400K 25°, Black | 120 | 8 | 50 | 500 | 62.5 | 2070 | 25 | 2400K | 82 | 3.5 | 2.5 | 12 | MTO |
| LED8P2027KFLB | Non-Dimmable 8W Smooth PAR20 - 2700K 40°, Black | 120 | 8 | 50 | 500 | 62.5 | 754 | 40 | 2700K | 82 | 3.5 | 2.5 | 12 | STK |
| LED8P2027KNFLB | Non-Dimmable 8W Smooth PAR20 - 2700K 25°, Black | 120 | 8 | 50 | 500 | 62.5 | 2070 | 25 | 2700K | 82 | 3.5 | 2.5 | 12 | STK |
| LED8P2030KFLB | Non-Dimmable 8W Smooth PAR20 - 3000K 40°, Black | 120 | 8 | 50 | 515 | 64.4 | 820 | 40 | 3000K | 82 | 3.5 | 2.5 | 12 | STK |
| LED8P2030KNFLB | Non-Dimmable 8W Smooth PAR20 - 3000K 25°, Black | 120 | 8 | 50 | 515 | 64.4 | 2250 | 25 | 3000K | 82 | 3.5 | 2.5 | 12 | STK |
| LED8P2035KFLB | Non-Dimmable 8W Smooth PAR20 - 3500K 40°, Black | 120 | 8 | 50 | 525 | 65.6 | 845 | 40 | 3500K | 82 | 3.5 | 2.5 | 12 | MTO |
| LED8P2035KNFLB | Non-Dimmable 8W Smooth PAR20 - 3500K 25°, Black | 120 | 8 | 50 | 525 | 65.6 | 2318 | 25 | 3500K | 82 | 3.5 | 2.5 | 12 | MTO |
| LED8P2041KFLB | Non-Dimmable 8W Smooth PAR20 - 4100K 40°, Black | 120 | 8 | 50 | 530 | 66.3 | 869 | 40 | 4100K | 82 | 3.5 | 2.5 | 12 | MTO |
| LED8P2041KNFLB | Non-Dimmable 8W Smooth PAR20 - 4100K 25°, Black | 120 | 8 | 50 | 530 | 66.3 | 2385 | 25 | 4100K | 82 | 3.5 | 2.5 | 12 | MTO |

c UL us 5 YEAR WARRANTY

For the most up-to-date specs, please visit www.tcpi.com

ENERGY STAR PARTNER