



Wet Location S14

Perfect for applications with hard to reach areas, vibration, and frequent starts.

Limitless options for the following applications:

- Chandeliers
- Ceiling Fans
- Decorative
- Indoor Fixtures
- Outdoor Fixtures
- Scoreboards
- Movie Signs

Great features and benefits:

- Long Life: 25,000 hours – no more bulb replacements!
- Fully dimmable, brilliant LED light.
- Excellent white color consistency from bulb to bulb
- UL approved for wet locations.
- Wet location to replace cold cathodes.

* Three or more lamps per dimming circuit is recommended for optimal dimming.



S14 Clear

S14 Frosted

S14 Red

S14 Green



LED
we know light.™



LED

25,000 Hours average rated life, 120Volts

Applications:

Ideal for decorative dimming applications. Suitable for outdoor fixtures. Also perfect for applications with hard to reach areas, vibration, and frequent starts.

Accent and decorative lighting including:

- + Chandeliers
- + Outdoor Fixtures
- + Ceiling Fans
- + Scoreboards
- + Decorative
- + Movie Signs
- + Indoor Fixtures




Light output equivalent to 40W.
Cold cathode replacement.

Features and Benefits

- Long Life: 25,000 hours – no more bulb replacements!
- Fully dimmable, brilliant LED light.
- Excellent white color consistency from bulb to bulb
- UL approved for wet locations.
- Wet location to replace cold cathodes.

* Three or more lamps per dimming circuit is recommended for optimal dimming.




LED5E26S1427K

Catalog Number

Notes

Type

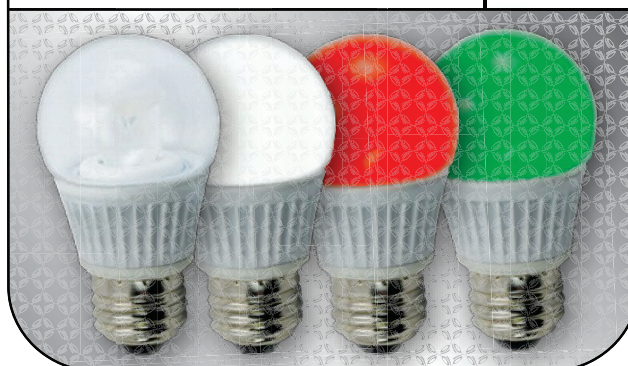

Specifications (at full brightness)

Input Line Voltage:	120VAC
Input Line Frequency	60HZ
Lamp Life (Rated)	25,000 hrs
Minimum Starting Temp	-30°C
Maximum Operating Temp	40°C
UL/cUL Listed	Yes
Power Factor	92%
CRI	82

Warranties and Certifications:	Item #	Description	Voltage	Wattage	Wattage Equivalent	M.O.L. (inches)	Diameter (inches)	Lumens	LPW	CCT	CRI
3 YEAR WARRANTY	LED5E26S1427K	LED 5W WET LOCATION S14 - 2700K	120	5.0	40W	3.8	1.4	300	60	2700K	82
	LED5E26S1430K	LED 5W WET LOCATION S14 - 3000K	120	5.0	40W	3.8	1.4	300	60	3000K	82
	LED5E26S1441K	LED 5W WET LOCATION S14 - 4100K	120	5.0	40W	3.8	1.4	300	60	4100K	82
	LED5E26S1427KF	LED 5W WET LOCATION S14 - 2700K Frosted	120	5.0	40W	3.8	1.4	300	60	2700K	82
	LED5E26S1430KF	LED 5W WET LOCATION S14 - 3000K Frosted	120	5.0	40W	3.8	1.4	300	60	3000K	82
	LED5E26S1441KF	LED 5W WET LOCATION S14 - 4100K Frosted	120	5.0	40W	3.8	1.4	300	60	4100K	82
	LED5E26S14RD	LED 5W WET LOCATION S14 - RED	120	5.0	40W	3.8	1.4	—	—	—	—
	LED5E26S14GR	LED 5W WET LOCATION S14 - GREEN	120	5.0	40W	3.8	1.4	—	—	—	—
For the most up-to-date specs, please visit www.tcp.com											

TCP is proud to have been awarded
ENERGY STAR® Partner of the Year 2013.

