

LT20 LED Indicator Lamps

- 50,000 Hours average rated life.

Item #	Wattage	Description	Voltage	Number of LED's	Intensity per LED (mcd)	Lumens	Base	M.O.L. (inches)	Diameter (inches)
LT20AMB	5	LED Tubular T20 Lamp, Amber	120	88	800	-	Medium	4.8	2.5
LT20BL	5	LED Tubular T20 Lamp, Blue	120	88	1000	-	Medium	4.8	2.5
LT20GR	5	LED Tubular T20 Lamp, Green	120	88	3000	-	Medium	4.8	2.5
LT20RD	5	LED Tubular T20 Lamp, Red	120	88	2500	-	Medium	4.8	2.5
LT20WH50K	5	LED Tubular T20 Lamp, White, 5000K	120	88	2500	50	Medium	4.8	2.5

Applications


- Indicator lights, navigation lights, emergency lights
- Ideal for applications with frequent starts or vibration

Features and Benefits

- Long life: 50,000 hours
- UL Wet Location Rated
- Rated for continuous operation
- Excellent color consistency from bulb to bulb
- No need for frequent bulb replacements or relamping
- Excellent for rapid cycling applications
- Prismatic lens for better light distribution

Specification

Input Line Voltage ----- 120VAC
 Input Line Frequency ----- 60HZ
 Lamp Life (rated) ----- 50,000 Hours
 Minimum Starting Temperature ----- -20 ° F
 Maximum Operating Temperature ----- 160 ° F
 U.L. / C.U.L. Listed ----- Yes
 Power Factor ----- > .60 - .70
 Total Harmonic Distortion ----- < 33%

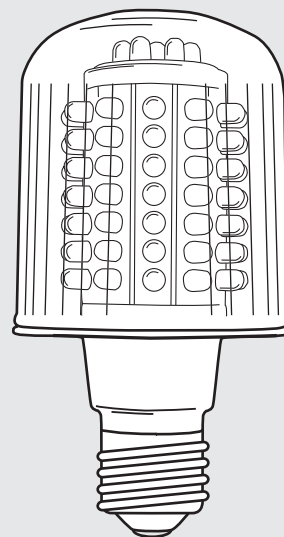

5 YEAR
WARRANTY



TCP, Inc.

325 Campus Drive | Aurora, Ohio 44202 | P: 800-324-1496 | F: 330-995-6188 | tcp.com

©TCP, Inc. 2009/40250