


Version	V1.0	Date	6/24/2025
Prepared By	J.C		

PRODUCT SPECIFICATION

Category	LED Troffer
Item Number	9815
Stock Code	TF40S/2X2/8C3/TAA
Mounting	Recessed
Housing Color	White

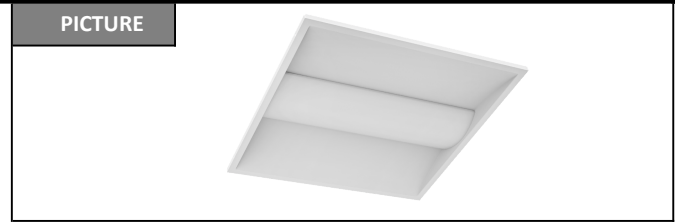

ELECTRICAL CHARACTERISTICS

Rated Wattage (W)	20/30/40W	Replacement Wattage (W)	
Tested Wattage (W)	-		
Input Voltage (V)	120-277V	Surge Protect Level	2KV
Voltage Frequency (Hz)	50/60HZ		
Input Current (A)	0.37@120V	Dimmable	0-10V
Power Factor	≥0.9	AUX (12V) Line	-
THD	≤20%		

PHOTOMETRIC CHARACTERISTICS

Lumen (lm)	2600/3900/5200lm	CCT (K)	35/40/50K
Efficacy (lm/w)	130lm/w	Beam Angle (°)	115
CRI	≥80		

GENERAL CHARACTERISTICS


Operating Temperature (°F)	-4~122°F
Storage Temperature (°F)	-4~122°F
IP Rating	IP20
Rated Life	50000hrs
Warranty	5 years

ACCESSORIES

Item #	Stock Code	Description
7336	BAEM4-60BC/MV-A	Emergency battery 4W 120-277V
7338	BAEM8L-60BC/347-A	Emergency battery 8W 120-347V w/conduit
7347	BAEM4-55BC/347-A	Emergency battery 4W 120-347V

PRODUCT DIMENSIONS

Length (in/mm)	23.74"	603mm
Width (in/mm)	23.74"	603mm
Height (in/mm)	2.09"	53mm
Weight (lbs/kg)	5.1lbs	2.3kg



CERTIFICATIONS

ETL	ETL, cETL	CEC	
TAA	YES	JA8	
Energy Star		FCC	✓
DLC	V5.1 Premium	RoHs	✓

DOCUMENTS

LM79	✓	IES File	✓
LM80	✓	Dimmer List	-
Ballast List			

COMMENTS

--